

RESIDENCE INN BY MARRIOTT
NW CORNER OF PINE & MEMORIAL,
TULSA, OK



Sheet List	
Sheet Number	Sheet Name
S100	COVER PAGE
S101	STRUCTURAL NOTES
S102	STRUCTURAL NOTES
S103	STRUCTURAL NOTES
S104	STRUCTURAL NOTES
S105	STRUCTURAL NOTES
S106	FOUNDATION PLAN
S107	FIRST FLOOR WALL LAYOUT PLAN
S108	FIRST FLOOR SHEAR WALL LAYOUT PLAN
S109	SECOND FLOOR FRAMING LAYOUT PLAN
S110	SECOND FLOOR WALL LAYOUT PLAN
S111	SECOND FLOOR SHEAR WALL LAYOUT PLAN
S112	THIRD FLOOR FRAMING LAYOUT PLAN
S113	THIRD FLOOR WALL LAYOUT PLAN
S114	THIRD FLOOR SHEAR WALL LAYOUT PLAN
S115	FOURTH FLOOR FRAMING LAYOUT PLAN
S116	FOURTH FLOOR WALL LAYOUT PLAN
S117	FOURTH FLOOR SHEAR WALL LAYOUT PLAN
S118	ROOF FRAMING LAYOUT PLAN
S119	PARAPET LEVEL FRAMING PLAN
S120	HEAD ROOM TOP ROOF FRAMING LAYOUT PLAN
S121	FIRST FLOOR HRS PLAN
S122	TYPICAL FLOOR HRS PLAN
S123	HEADROOM/TOP ROOF HRS PLAN
S130	LOADING PLAN
S140	BUILDING SECTION 1
S141	BUILDING SECTION 2
S142	BUILDING SECTION 3
S143	DETAILS
S144	DETAILS
S145	DETAILS
S146	DETAILS
S147	DETAILS
S148	DETAILS

ZONING INFORMATION:


OWNER: HI-TECH HOSPITALITY
ADDRESS: RESIDENCE INN BY MARRIOTT
NW CORNER OF PINE & MEMORIAL,
TULSA, OK

PARCEL RECORD: SEE CIVIL DRAWINGS
MUNICIPAL ZONE: OKLAHOMA
LOT USE: 4-STORY PUBLIC RESIDENCE AND
COMMERCIAL


LOT TYPE: (WOOD FRAME)

GOVERNING CODES

- a. INTERNATIONAL BUILDING CODE - 2018 (IBC 2018)
b. ASCE 7-16 MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES
c. ACI 318-19 BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE AND COMMENTARY
d. TMS 402-2016 BUILDING CODE REQUIREMENTS AND SPECIFICATIONS FOR MASONRY STRUCTURES
e. AISC 15TH EDITION (360-16) ASD- MANUAL OF STEEL CONSTRUCTION LOAD & RESISTANCE FACTOR DESIGN
f. NDS 2018 NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION ALLOWABLE STRESS DESIGN
g. STEEL DECK INSTITUTE DIAPHRAGM DESIGN MANUAL SECOND EDITION

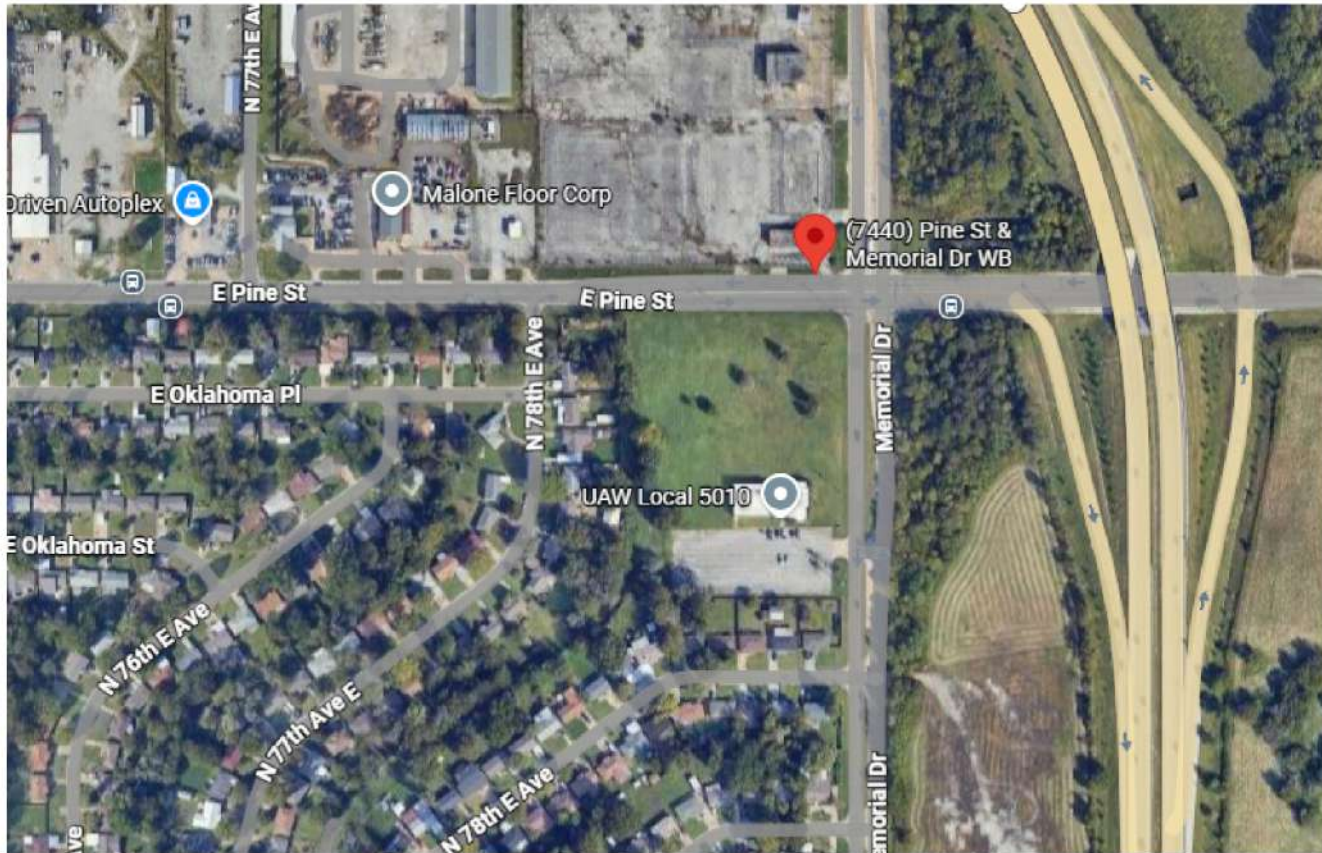

VICINITY MAP

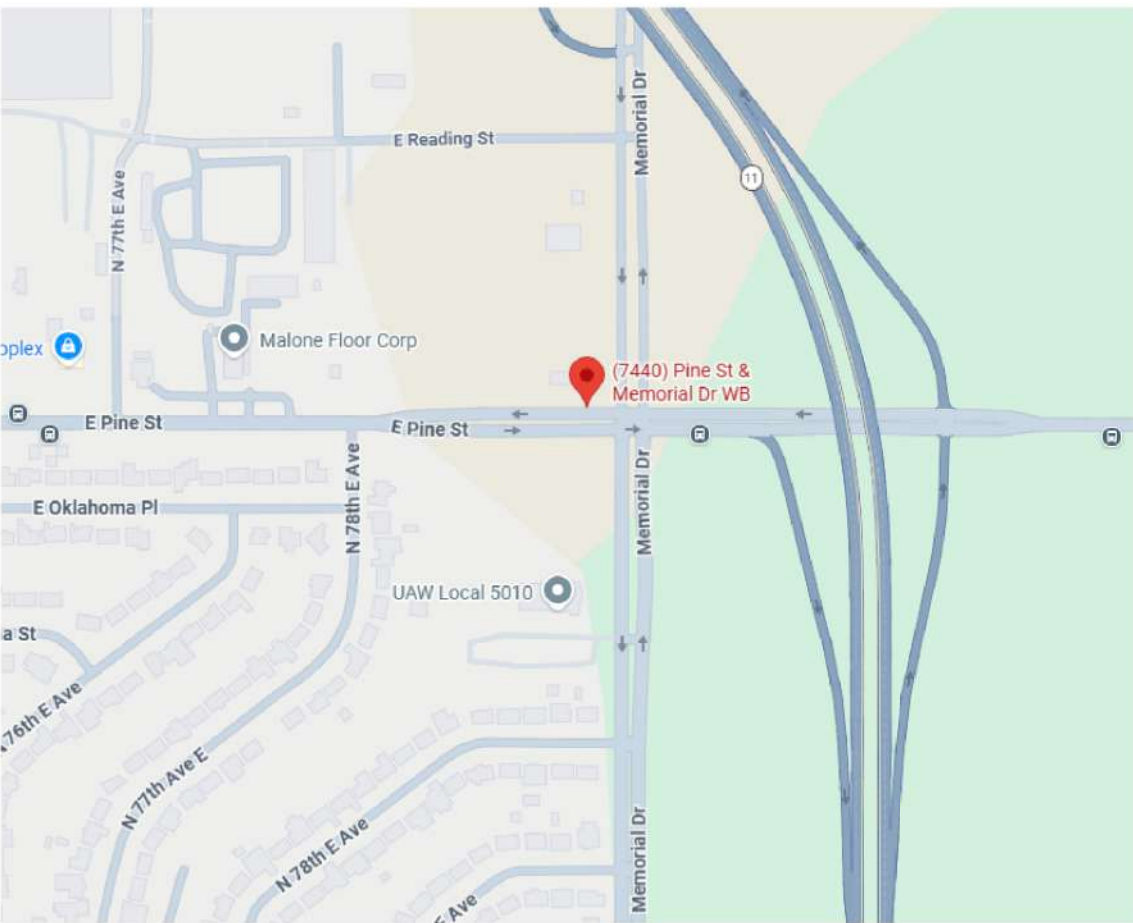

LOCATION MAP

NOTE: THE LOCATION OF EXISTING UNDERGROUND UTILITIES, SUCH AS WATER MAINS, SEWERS, GAS LINES, ETC., AS SHOWN ON THE PLANS, HAS BEEN DETERMINED FROM THE BEST AVAILABLE INFORMATION AND IS GIVEN FOR THE CONVENIENCE OF THE CONTRACTOR. HOWEVER, THE OWNER AND THE ENGINEER DO NOT ASSUME RESPONSIBILITY IN THE EVENT THAT DURING CONSTRUCTION, UTILITIES OTHER THAN THOSE SHOWN MAY BE ENCOUNTERED. AND THAT THE ACTUAL LOCATION OF THOSE WHICH ARE SHOWN MAY BE DIFFERENT FROM THE LOCATION AS SHOWN ON THE PLANS.

JS

ARCHITECTS

9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - hmanford@jax.com
COPYRIGHT 2026, John Sanford

6-08-2026
NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

DEVELOPED BY
HI-TECH HOSPITALITY

Residence INN
BY MARRIOTT

RESIDENCE INN BY
MARRIOTT

NW CORNER OF PINE &
MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR
REVIEW AND PERMITTING. DRAWINGS
ARE NOT TO BE USED FOR
CONSTRUCTION WITHOUT ARCHITECT'S
AND ENGINEER'S SIGNATURE AND THEIR
DATE OF ISSUE FOR CONSTRUCTION

No.	Description	Date

TULSA AIRPORT RIBM
61208
Project Number

SHEET
S100
COVER PAGE

REBAR SIZE NO. #	NOMINAL BAR DIAMETER	'BARS AND WIRES IN 'TENSION	'SPICES OF BARS AND WIRES IN 'TENSION	'BARS IN TENSION IN STANDAR D HOOK	'BARS AND WIRES IN 'COMP.	'SPICES OF BARS AND WIRES IN 'COMP	'BARS AND WIRES IN 'TENSION	EPOXY COATED BARS			
								'SPICES OF BARS AND WIRES IN 'TENSION	'BARS IN TENSION N STANDAR D HOOK	'BARS IN 'COMP.	'SPICES BARS IN 'COMP
	d _b	l _d	l _s	l _{dh}	l _{dc}	l _{sc}	l _d	l _s	l _{dh}	l _{dc}	l _{dc}
3	0.375 in	12 in	16 in	6 in	8 in	12 in	13 in	17 in	6 in	8 in	12 in
4	0.500 in	15 in	19 in	7 in	9 in	15 in	18 in	23 in	8 in	9 in	15 in
5	0.625 in	18 in	24 in	8 in	12 in	19 in	22 in	29 in	10 in	12 in	19 in
6	0.750 in	22 in	29 in	10 in	14 in	23 in	27 in	35 in	12 in	14 in	23 in
7	0.875 in	32 in	42 in	12 in	17 in	26 in	39 in	51 in	14 in	17 in	26 in
8	1.000 in	37 in	48 in	13 in	19 in	30 in	44 in	58 in	16 in	19 in	30 in
9	1.128 in	42 in	54 in	15 in	21 in	34 in	55 in	71 in	18 in	21 in	34 in
10	1.270 in	50 in	65 in	17 in	24 in	38 in	65 in	85 in	20 in	24 in	38 in
11	1.410 in	61 in	80 in	19 in	27 in	42 in	80 in	104 in	22 in	27 in	42 in

1.




ld = DEVELOPMENT LENGTH IS THE LENGTH REQUIRED FOR THE HORIZONTAL REINFORCEMENT BAR TO BE PLACED IN FRESH OR EXISTING CONCRETE.
2.

ls = SPLICE LENGTH IS THE LENGTH REQUIRED FOR THE HORIZONTAL REINFORCEMENT BAR TO BE TIED TO ANOTHER HORIZONTAL REINFORCEMENT BAR.
3.

ldh = HOOK DEVELOPMENT LENGTH IS THE LENGTH REQUIRED FOR THE HORIZONTAL REINFORCEMENT BAR WHICH TERMINATES IN 90O, 135O OR 180O TO BE PLACED IN FRESH OR EXISTING CONCRETE.
4.

ldc = DEVELOPMENT LENGTH IS THE LENGTH REQUIRED FOR THE VERTICAL REINFORCEMENT BAR TO BE PLACED FRESH OR EXISTING CONCRETE.
5.

lsc = SPLICE LENGTH IS THE LENGTH REQUIRED FOR THE VERTICAL REINFORCEMENT BAR TO BE TIED TO ANOTHER VERTICAL REINFORCEMENT BAR. MINIMUM INSIDE BEND DIAMETERS & STANDARD HOOK GEOMETRY FOR STIRRUPS, TIES & HOOPS.

TYPE OF STANDA RD HOOK	BAR SIZE	MINIMUM INSIDE BEND DIAMETERS,in.	STRAIGHT EXTENSION [1] f _{ext} , in.	TYPE OF STANDARD HOOK
90º HOOK	NO.3 THROUGH H NO.5	4d _b	GREATER OF 6d _b & 3 in.	
	NO.6 THROUGH H NO.5	6d _b	12d _b	
135º HOOK	NO.3 THROUGH H NO.5	4d _b	GREATER OF 6d _b & 3 in.	
	NO.6 THROUGH H NO.5	6d _b		
180º HOOK	NO.3 THROUGH H NO.5	4d _b	GREATER OF 6d _b & 3 in.	
	NO.6 THROUGH H NO.5	6d _b		

[1] A STANDARD HOOK FOR STIRRUPS, TIES & HOOPS INCLUDES THE SPECIFIC INSIDE BENS DIAMETER & STRAIGHT EXTENSION LENGTH, IT SHALL BE PERMITTED TO USE A LONGER STRAIGHT EXTENSION AT THE END OF A HOOK. A LONGER EXTENSION SHALL NOT BE CONSIDERED TO INCREASE THE ANCHORAGE CAPACITY OF THE HOOK.

Z.4.5 MASONRY DEVELOPMENT & SPLICE SCHEDULE				EPOXY COATED BARS		
REBAR SIZE NO. #	NOMINAL BAR DIAMETER d _b ,IN	NOMINA L AREA,1 IN²	1 DEVELOPMENT LENGTH, IN	2 BC SPLICE LENGTH, IN	1,3 EPOXY COATED DEVELOPMENT LENGTH, IN	2,3 EPOXY COATED SPLICE LENGTH, IN
3	0.375	0.11	12	36	18	54
4	0.500	0.20	12	48	18	72
5	0.625	0.31	18	60	28	90
6	0.750	0.44	34	72	51	108
7	0.875	0.60	47	84	70	126
8	1.000	0.79	70	96	106	144
9	1.128	1.00	90	108	134	162
10	1.270	1.27	114	122	170	183
11	1.410	1.56	140	135	210	203

1.


DEVELOPMENT LENGTH IS THE LENGTH REQUIRED FOR THE REINFORCEMENT BAR TO BE PLACED IN FRESH OR EXISTING CONCRETE.
2.

SPLICE LENGTH IS THE LENGTH REQUIRED FOR THE REINFORCEMENT BAR TO BE TIED TO ANOTHER REINFORCEMENT BAR.
3.

TMS 8.1.6.2, IBC 2107.2.1. EPOXY COATED REBARS SHALL BE TAKEN AS 150 PERCENT OF THE DEVELOPMENT AND SPLICE LENGTHS.
4.

IBC 2107.4 MAXIMUM BAR SIZE. THE BAR DIAMETER SHALL NOT EXCEED 1/8TH OF THE NOMINAL WALL THICKNESS, AND SHALL NOT EXCEED 1/4TH OF THE LEAST DIMENSION OF THE CELL, COURSE OR COLLAR JOINT IN WHICH IT IS PLACED.
5.

TMS 8.1.6.7.1.3 BARS SPLICED BY NON-CONTACT LAP SPLICES SHALL NOT BE SPACED TRANSVERSELY FARTHER APART THAN 1/5TH THE REQUIRED LENGTH OF LAP, NOR MORE THAN 8".



14. WELDED WIRE MESH

- a.

WELDED WIRE MESH SHALL BE ASTM A185, GRADE 65, FREE FROM OIL, SCALE AND RUST AND SHALL BE PLACED IN ACCORDANCE WITH THE ACI TYPICAL DETAILS.
- b.

MINIMUM LAP SHALL BE ONE SPACE PLUS TWO INCHES.

15. EXPANSION ANCHORS

- a.

USE WEDGE-TYPE EXPANSION ANCHORS SUCH AS THE HILTI KWIK BOLT, ITW RAMSET RED HEAD TRUBOLT WEDGE, POWERS RAWL POWER-STUD, SIMPSON STRONG-TIE WEDGE-AII OR ACCEPTED EQUIVALENT.FOLLOW MANUFACTURER'S SPECIFICATIONS FOR USE AND INSTALLATION.
- b.

CONFIRM THE ABSENCE OF REINFORCING STEEL BY DRILLING A 1/4" DIAMETER PILOT HOLE FOR EACH ANCHOR. DO NOT CUT REINFORCING STEEL WITHOUT APPROVAL OF THE STRUCTURAL ENGINEER.
- c.

PROVIDE ANCHOR EMBEDMENT, SPACING AND EDGE DISTANCE AS SHOWN ON THE DRAWINGS.

16. CHEMICAL ADHESIVE FOR ANCHORING REINFORCING BARS, THREADED RODS AND ANCHOR BOLTS

- a.

THREADED RODS ARE ASTM A193 B7 STEEL, U.N.O.
- b.

USE AN EPOXY, ACRYLIC OR POLYESTER RESIN ADHESIVE SYSTEM SUCH AS THE HILTI HIT HY200 2 PART EPOXY INJECTION SYSTEM, OR ACCEPTED EQUIVALENT. FOLLOW MANUFACTURER'S SPECIFICATIONS FOR USE AND INSTALLATION. CONFIRM THE ABSENCE OF REINFORCING STEEL BY DRILLING A 1/4" DIAMETER PILOT HOLE FOR EACH ANCHOR. DO NOT CUT REINFORCING STEEL WITHOUT APPROVAL OF THE STRUCTURAL ENGINEER.
- c.

REFER TO MANUFACTURER'S INSTALLATION INSTRUCTIONS FOR APPROPRIATE DRILL SIZE. THOROUGHLY CLEAN HOLE INCLUDING REMOVAL OF DUST PRIOR TO FILLING WITH EPOX'D.
- d.

PROVIDE ANCHOR EMBEDMENT, SPACING AND EDGE DISTANCE AS SHOWN ON THE DRAWINGS.

17. POWDER ACTUATED FASTENERS

- a.

DL USE POWDER ACTUATED FASTENING SYSTEMS SUCH AS THOSE MANUFACTURED BY HILTI, ITW RAMSET/ REDHEAD, RAWL OR AN SEOR APPROVED ALTERNATE.
- b.

INSTALL IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
- c.

PROVIDE A MINIMUM OF TWO FASTENERS PER CONNECTION.
- d.

PROVIDE A MINIMUM PENETRATION IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS BUT NOT LESS THAN 1-1/8" IN CONCRETE, U.N.O.
- e.

PROVIDE A MINIMUM ANCHOR SPACING AND EDGE DISTANCE OF 3" IN CONCRETE AND A MINIMUM ANCHOR SPACING OF 1" AND EDGE DISTANCE OF 1/2" IN STEEL.

18. TIMBER NOTES

- a.

ALL WOOD MEMBERS HAVE BEEN DESIGNED IN ACCORDANCE WITH THE NATIONAL DESIGN SPECIFICATION FOR WOOD CONSTRUCTION AND ITS SUPPLEMENT, (NDS), 2018 EDITION.
- b.

ALL WOOD FOR BEAMS, BEARING WALLS, SOLE PLATES, TOP PLATES, BLOCKING, BRACING, LEDGERS, CRIPPLES,SILLS, ETC. SHALL BE SPRUCE-PINE-FIR NO.2 OR BETTER WITH MOISTURE CONTENT OF 19% OR LESS.
- c.

FLOOR I JOISTS SHALL BE SOUTHERN PINE NO.1
- d.

MICRO LAM BEAMS SHALL BE MANUFACTURED BY TRUSS-JOIST CORP. OR AN APPROVED EQUAL AND SHALL PROVIDE A MODULUS OF ELASTICITY OF 1,900,000 PSI, A MINIMUM FLEXURAL STRENGTH OF 2600 PSI AND A MINIMUM HORIZONTAL SHEAR STRESS OF PSI.
- e.

ALL WOOD IN CONTACT WITH CONCRETE OR CONCRETE BLOCK SHALL BE PRESSURE TREATED .ACCEPTABLE TREATMENTS INCLUDE ACQ (AMINE COPPER QUAT) COPPER BORON AZOLE, ACID COPPER CHROMATE AND COPPER CITRATE.
- f.

BORATE BASED TREATMENTS SUCH AS ZINC BORATE AND SODIUM BORATE ARE ALSO ACCEPTABLE FOR INDOOR USES.
- g.

FOR STRUCTURAL USES, AVOID BUYING TREATED LUMBER THAT CONTAINS MORE THAN 1/2" OF HEARTWOOD.
- h.

AVOID INHALATION OF SAWDUST PRODUCED BY PRESSURE TREATED WOOD. WEAR A DUST MASK AND WORK OUTDOORS. DISPOSE OF DUST AND SCRAP BY ORDINARY TRASH COLLECTION. DO NOT BURN. PRESSURE TREATED WOOD MAY PRODUCE TOXIC F.
- i.

LIGHT GAUGE STRAPS SHALL BE INSTALLED ACCORDING TO MANUFACTURER'S INSTRUCTIONS. HANGERS OR STRAPS THAT DO NOT MATCH EXACTLY THE ONES SPECIFIED ON THE DRAWINGS IN STEEL YIELD OR ULTIMATE STRENGTH, STEEL DIMENSIONS (LENGTH AND WIDTH), NUMBER AND DIAMETER OF HOLES FOR THE SAME SIZES OF NAILS OR BOLTS AND/OR DO NOT HAVE THE SAME GENERAL SHAPE WILL NOT BE ACCEPTABLE UNLESS APPROVED BY THE SEOR.
- j.

NO POCKETS WILL BE ALLOWED IN CONCRETE OR STEEL MEMBERS FOR CONNECTION OF WOOD MEMBERS UNLESS THE CONNECTION DETAIL IS IN WRITING PRIOR TO INSTALLATION.
- k.

ALL NAILS, SCREWS AND BOLTS SHALL BE HOT-DIPPED GALVANIZED.

- l.

ALL TJI JOISTS AND PARALLEL BEAMS AND COLUMNS SHALL BE AS MANUFACTURED BY TRUSS JOIST INC OR AN APPROVED EQUAL. SUBMIT MANUFACTURER SPECIFICATIONS TO SEOR FOR REVIEW AND APPROVAL (AS REQUIRED BY THE DESIGN CONTRACT).

19. PRE-ENGINEERED TIMBER TRUSS NOTES

- a.

WOOD TRUSSES TO BE DESIGNED AND FABRICATED IN ACCORDANCE WITH THE "NATIONAL DESIGN SPECIFICATIONS FOR STRESS-GRADE LUMBER AND ITS FASTENINGS" BY THE NFPA.
- b.

TRUSS DESIGN SHALL COMPLY WITH TPI/WTCABCSI 1-2013" BUILDING COMPONENT SAFETY INFORMATION GUIDE TO GOOD PRACTICE FOR HANDLING, INSTALLING & BRACING OF METAL PLATE CONNECTED WOOD TRUSSES" AND TPI 1-2014" NATIONAL DESIGN STANDARD FOR METAL-PLATE CONNECTED WOOD CONSTRUCTION"
- c.

CONNECTOR PLATES SHALL BE A MINIMUM THICKNESS OF 0.036" AND BE MANUFACTURED FROM STEEL MEETING THE REQUIREMENTS OF ASTM A446, GRADE A AND SHALL BE HOT-DIPPED GALVANIZED.
- d.

IN HIGHLY CORROSIVE ENVIRONMENTS, CONNECTOR PLATES AS WELL AS THE LIGHT GAUGE STRAPS AND ALL THE NAILS, SHALL BE HOT DIPPED GALVANIZED, TRIPLE ZINC G-185 COATED OR MADE WITH STAINLESS STEEL.
- e.

THE STRUCTURAL FRAMING SHOWN IS SCHEMATIC IN NATURE. HOWEVER THE SUPPORTING STRUCTURE HAS BEEN DESIGNED UNDER THE ASSUMPTION THAT THE FRAMING SCHEME SHOWN WILL CLOSELY PARALLEL FINAL TRUSS DESIGNERS LAYOUT. THE LOCATIONS OF GIRDERS AND TRUSSES SHOWN ON THE ROOF FRAMING PLAN WERE USED TO FACILITATE DESIGN OF FOUNDATIONS, WALLS, AND BEAMS.
- f.

PROVIDE SIGNED AND SEALED SHOP DRAWINGS AND CALCULATIONS FOR APPROVAL PRIOR TO FABRICATION. RELEASE OF TRUSSES FOR FABRICATION PRIOR TO ENGINEER APPROVAL WILL BE AT THE SOLE RISK OF THE 'RELEASER'

- g.

REVIEW OF SHOP DRAWINGS IS REQUIRED AS THE ENGINEER CHECKS BEAM, WALL, COLUMN AND FOOTING CAPACITIES AGAINST KNOWN LOADING. FAILURE TO PROVIDE SHOP DRAWINGS MAY RESULT IN ADDITIONAL ENGINEERING COSTS DURING CONSTRUCTION.
- h.

TRUSS FABRICATOR SHALL PROVIDE ENGINEERED SHOP DRAWINGS OF EACH INDIVIDUAL TRUSS AND A FULLY DIMENSIONED ERECTION PLAN SHOWING COMPONENT LAYOUT.
- i.

TRUSS DESIGNS SHALL BE SIGNED AND SEALED BY A QUALIFIED STATE LICENSED PROFESSIONAL ENGINEER.
- j.

CONTRACTOR SHALL SUBMIT SIGNED AND SEALED DRAWINGS OF ALTERNATE CONNECTION DETAILS AT TRUSSES/GIRDERS TO COLUMNS AND WALLS FOR APPROVAL.
- k.

HANDLING, ERECTION AND BRACING OF TRUSSES SHALL BE IN ACCORDANCE WITH TRUSS PLATE INSTITUTE RECOMMENDATIONS.
- l.

THE CONTRACTOR WILL BE RESPONSIBLE FOR KEEPING THE ROOF SAFELY IN PLACE IN THE EVENT OF HIGH WINDS OR OTHER TRANSIENT LOADING CONDITIONS DURING CONSTRUCTION. FAILURE TO COMPLY WITH THESE PARAMETERS WILL MAKE THE CONTRACTOR SOLELY RESPONSIBLE FOR ANY AND ALL CONSEQUENTIAL DAMAGES CAUSED BY THE HORIZONTAL THRUST DEVELOPED BY THE ROOF FRAMING DUE TO SUPERIMPOSED LOADING AND TRANSFERRED INTO HE BEAMS, WALLS AND COLUMNS.
- m.

THE ARCHITECT AND ITS CONSULTANTS OR DESIGN PROFESSIONALS WILL NOT BE RESPONSIBLE FOR ANY DAMAGE CAUSED AS A CONSEQUENCE OF TERMITE INFESTATION.
- n.

THE LIGHT GAUGE STRAPS SPECIFIED ON THE WALL SECTIONS AND PLANS ARE PROVIDED TO FACILITATE THE CONSTRUCTION SCHEDULE AND MAY CHANGE PREDICATED ON THE TRUSS AND GIRDER REACTIONS PROVIDED BY THE TRUSS ENGINEER.

20. STRUCTURAL STEEL

- a.

THE MATERIAL, FABRICATION, AND ERECTION OF STRUCTURAL STEEL SHALL COMPLY WITH THE SPECIFICATIONS FOR THE DESIGN, FABRICATION AND ERECTION OF STRUCTURAL STEEL FOR BUILDINGS,14TH EDITION BY THE AMERICAN INSTITUTE OF STEEL CONSTRUCTION.
- b.

STRUCTURAL STEEL SHAPES SHALL BE FABRICATED FROM THE FOLLOWING MATERIALS:

SECTION/SHAPE	ASTM	YIELD STRESS FY(KSI)	GRADE
W, WT	A992	50	-
M,S,C,MC,ANGLE	A36	36	-
BAR	A36	36	-
PLATE	A36	36	-
HSS SQUARE, RECTANGULAR	A500	46	B
PIPE (TYPE E OR R)	A53	35	B

- c.

SPACE FILLER BEAMS EQUALLY BETWEEN SUPPORTS, U.N.O.
- d.

DO NOT SPLICE STRUCTURAL STEEL MEMBERS EXCEPT WHERE INDICATED ON THE DRAWINGS.
- e.

SEE ARCHITECTURAL AND MECHANICAL DRAWINGS FOR MISCELLANEOUS STEEL NOT SHOWN ON THE STRUCTURAL DRAWINGS.
- f.

REFER TO ARCHITECTURAL DRAWINGS AND PROJECT SPECIFICATIONS (WHERE APPLICABLE) FOR PAINTING AND FIREPROOFING.
- g.

ALL STEEL SHALL RECEIVE SHOP AND FIELD TOUCH-UP COATS OF PAINT IN ACCORDANCE WITH SSPC SPECIFICATIONS.

21. COMPOSITE CONSTRUCTION

- a.

ALL STEEL BEAMS (INCLUDING CHANNELS, STEEL TUBES, WIDE FLANGE SECTIONS, TRUSSES, ETC) SUPPORTING CONCRETE FLOORS ON STEEL DECK ARE TO BE CONSTRUCTED AS COMPOSITE WITH THE SLAB AND SHALL BE CONSTRUCTED UNSHORED, U.N.O.
- b.

WELD ¼" DIAMETER HEADED STEEL STUDS TO ALL COMPOSITE BEAMS – UNLESS BASE MATERIAL IS THINNER THAN 0.3H, (THEN,USE 5/8" DIAMETER STUDS,) WELD STUDS THROUGH DECK.
- c.

STUDS SHALL CONFORM TO AWS 01.1. STUD LENGTH SHALL EXTEND 1 1/2" ABOVE TOP FLUTE OF DECK.
- d.

SPACE STUDS AT 12" O.C. FOR GIRDERS SUPPORTING BEAMS AND AT 24" O.C. FOR BEAMS SUPPORTING STEEL DECK ONLY, U.N.O.

22. SHEAR STUDS

- a.

SHEAR STUD CONNECTORS SHALL BE FABRICATED AND INSTALLED IN ACCORDANCE WITH AWS D1.1 STRUCTURAL WELDING CODE, SECTION 7-STUD WELDING.
- b.

STUDS SHALL BE TYPE 'B', HEADED STUDS HAVING A MINIMUM TENSILE STRENGTH OF 60,000 PSI AND SHALL BE OF LENGTH AND DIAMETER SHOWN ON STRUCTURAL DRAWINGS.

23. BOLTS CONNECTIONS

- a.

A325 AND A490 BOLTS SHALL COMPLY WITH "SPECIFICATION FOR STRUCTURAL JOINTS USING ASTM A325 OR A490 BOLTS" INCLUDING COMMENTARY.
- b.

USE A-307 BOLTS FOR ALL ERECTION BOLTS AND BOLTS LESS THAN 3/4" DIAMETER, U.N.O.
- c.

USE A-325 BOLTS FOR ALL TYPICAL BOLTS
- d.

ANCHOR RODS SHALL BE ASTM F1554 GRADE 55 WITH SUPPLEMENTARY REQUIREMENT S1,HOOKED AND 1 1/2 ASTM F1554 GRADE 105 WITH SUPPLEMENTAL REQUIREMENTS, STRAIGHT WITH NUTS AND WASHERS EACH END.
- e.

TIGHTEN BEARING-TYPE BOLTS (A-325N, A-325X, A-490N, AND A-490X) TO THE SNUG TIGHT CONDITION AS FOLLOWS:
- f.

BOLTS SHALL BE PLACED IN ALL HOLES, WITH WASHERS POSITIONED AS REQUIRED AND NUTS THREADED TO COMPLETE THE ASSEMBLY.
- g.

COMPACTING THE JOINT TO THE SNUG-TIGHT CONDITION SHALL PROGRESS SYSTEMATICALLY FROM THE MOST RIGID PART OF THE JOINT.
- h.

THE SNUG-TIGHTENED CONDITION IS THE TIGHTNESS THAT IS ATTAINED WITH A FEW IMPACTS OF AN IMPACT WRENCH OR THE FULL EFFORT OF AN IRON WORKER USING AN ORDINARY SPUD WRENCH.
- i.

MORE THAN ONE CYCLE THROUGH THE BOLT PATTERN MAY BE REQUIRED TO ACHIEVE THE SNUG TIGHTENED JOINT.

- j.

TIGHTEN SLIP-CRITICAL BOLTS (A-325SC AND A-490SC) TO THE MINIMUM FASTENER TENSION INDICATED IN TABLE 8.1 OF THE "SPECIFICATION FOR STRUCTURAL JOINTS USING ASTM A-325 OR ASTM A-490 BOLTS" AS FOLLOWS:
- k.

BEGIN FINAL TIGHTENING OF SLIP-CRITICAL BOLTS ONLY AFTER A SNUG-TIGHT JOINT AS DESCRIBED ABOVE IS ACHIEVED.
- l.

IF SPLINED END OF TENSION-CONTROL BOLTS IS SEVERED PRIOR TO ACHIEVING SNUG-TIGHT JOINT,REMOVE AND REPLACE THE FASTENER ASSEMBLY.
- m.

PROGRESS SYSTEMATICALLY FROM THE MOST RIGID PART OF THE JOINT.
- n.

DETERMINE TENSION USING EITHER LOAD INDICATOR WASHERS OR TENSION-CONTROL BOLTS. AT THE CONTRACTOR'S OPTION, SLIP-CRITICAL BOLTS MAY BE INSTALLED IN EITHER STANDARD,OVERSIZE, OR SHORT SLOTTED HOLES. DESIGN OF CONNECTIONS USING SLIP CRITICAL BOLTS IS BASED ON A CLASS A FAILING SURFACE AND OVER SIZED HOLES.
- o.

PROVIDE HARDENED WASHERS CONFORMING TO ASTM F436 AND PLACE UNDER THE PART BEING TURNED.
- p.

DO NOT REUSE OR RE-TIGHTEN BOLTS WHICH HAVE BEEN FULLY TIGHTENED. USE ONLY NON-GALVANIZED NUTS AND BOLTS THAT ARE CLEAN, RUST-FREE, AND WELL LUBRICATED. BOLTS AND NUTS SHALL BE WAX DIPPED BY THE BOLT SUPPLIER OR LUBRICATED WITH JOHNSON'S STICK WAX 140. CLEANING AND LUBRICATION OF ASTM F1852TWIST-OFF-TYPE TENSION-CONTROL BOLTS IS NOT PERMITTED.
- q.

WHERE SLOTTED HOLES ARE USED TO ACCOMMODATE THERMAL MOVEMENT, NOTIFY THE ENGINEER IF BOLT IS EXPECTED TO HIT THE END OF SLOT, BASED ON TEMPERATURE AT TIME INSTALLATION.
- r.

STORE FASTENER COMPONENTS IN SEALED CONTAINERS UNTIL READY FOR USE. RESEAL OPEN CONTAINERS TO PREVENT CONTAMINATION BY MOISTURE OR OTHER DELETERIOUS SUBSTANCES. STORE CLOSED CONTAINERS FROM DIRT AND MOISTURE IN A PROTECTIVE SHELTER. TAKE FROM PROTECTIVE STORAGE ONLY AS MANY FASTENER COMPONENTS AS ARE ANTICIPATED TO BE INSTALLED DURING THE WORK SHIFT. FASTENER COMPONENTS THAT ARE NOT INCORPORATED INTO THE WORK SHALL BE RETURNED TO PROTECTIVE STORAGE AT THE END OF THE WORK-SHIFT. FASTENERS FROM OPEN CONTAINERS AND FASTENERS THAT ACCUMULATE RUST OR DIRT SHALL NOT BE USED AND SHALL BE IMMEDIATELY AND PERMANENTLY REMOVED FROM THE PROJECT SITE.

24.EXPANSION JOINT

- a.

THE VERTICAL EXPANSION JOINT IN STRAIGHT WALL SHOULD NOT BE MORE THAN 25'-0"

25.WELDED CONNECTIONS

- a.

WELDING SHALL BE DONE BY AWS CERTIFIED WELDERS USING THE MOST RECENT AWS APPROVED TECHNIQUES. SHIELDED METAL ARC WELDING (SMAW) SHALL USE E70XX LOW HYDROGEN ELECTRODES.
- b.

ALL SHOP AND FIELD WELDING SHALL CONFORM TO THE AWS 01.1 STRUCTURAL WELDING CODE BY THE AMERICAN WELDING SOCIETY.
- c.

WHERE NECESSARY, REMOVE GALVANIZING OR PRIMER PRIOR TO WELDING.

25.FORM WORK AND SHORING

- a.

NO STRUCTURAL CONCRETE SHALL BE STRIPPED UNTIL IT HAS REACHED AT LEAST TWO-THIRDS OF THE 28 DAY DESIGN STRENGTH.
- b.

FORM WORK, SHORING AND BRACING FOR ALL CONCRETE BEAMS, SLABS, COLUMNS, WALLS AND FOOTINGS SHALL BE DESIGNED AND CONSTRUCTED IN ACCORDANCE WITH ACI STANDARDS 347 AND 301 AND STATE AND LOCAL BUILDING CODES AND SHALL BE DESIGNED BY A REGISTERED ENGINEER.

26.SETTING BASE AND BEARING PLATES

- a.

CLEAN CONCRETE AND MASONRY BEARING SURFACE OF BOND-REDUCING MATERIALS AND CLEAN BOTTOM OF BASE AND BEARING PLATE.
- b.

SET BASE OR BEARING PLATE ON WEDGES OR OTHER ADJUSTING DEVICES
- c.

TIGHTEN ANCHOR RODS AFTER STRUCTURAL STEEL FRAME HAS BEEN PLUMBED. DO NOT REMOVE WEDGES OR SHIMS BUT, IF PROTRUDING, CUT OFF FLUSH WITH EDGE OF BASE OR BEARING PLATE PRIOR TO PACKING WITH GROUT.
- d.

PACK OR POUR NON-SHRINK, NON-METALLIC GROUT SOLIDLY BETWEEN BEARING SURFACE AND BASE OR BEARING PLATE. ENSURE THAT NO VOIDS REMAIN. FINISH EXPOSED SURFACES, PROTECT GROUT AND ALLOW TO CURE.
- e.

FOR PROPRIETARY GROUT MATERIALS, COMPLY WITH MANUFACTURER'S INSTRUCTIONS.
- f.

BASE PLATES MUST BE GROUTED A MINIMUM OF 72 HOURS PRIOR TO PLACING CONCRETE SLABS ON SUPPORTING STEEL STRUCTURE.
- g.

CUT, DRILL OR PUNCH HOLES PERPENDICULAR TO METAL SURFACES. REAM HOLES THAT MUST BE ENLARGED TO ADMIT BOLTS AS PERMITTED BY THE EOR. DO NOT ENLARGE UNFAIR HOLES BY BURNING OR USING DRIFT PINS.

JS

ARCHITECTS

9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - hmarinford@aai.com
COPYRIGHT 2020 John Searford

DEVELOPED BY

HI-TECH
HOSPITALITY

Residence Inn

BY HARRIOTT

**RESIDENCE INN BY
MARRIOTT**

NW CORNER OF PINE &
MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR
REVIEW AND PERMITTING. DRAWINGS
ARE NOT TO BE USED FOR
CONSTRUCTION WITHOUT ARCHITECTS
AND ENGINEERS SIGNATURE AND THEIR
DATE OF ISSUE FOR CONSTRUCTION

No.	Description	Date

6-08-2026

NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

TULSA AIRPORT RIBM
61208
Project Number

SHEET

S102

STRUCTURAL NOTES

27. MASONRY a. NET AREA COMPRESSIVE STRENGTH OF MASONRY: f_m=1900 PSI. U.N.O. b. NET AREA COMPRESSIVE STRENGTH OF MASONRY UNITS WITH MORTAR: f_c=1900 PSI. U.N.O. c. MORTAR SHALL CONFORM TO ASTM C270 AND THE FOLLOWING (UNLESS NOTED OTHERWISE) d. FOR MASONRY BELOW GRADE : TYPE 'M' WITH A MINIMUM AVERAGE STRENGTH OF 2500 PSI e. FOR MASONRY BELOW GRADE : TYPE 'S' WITH A MINIMUM AVERAGE STRENGTH OF 1800 PSI f. ALL CONCRETE MASONRY UNITS SHALL CONFIRM TO ASTM C90, 'STANDARD SPECIFICATION FOR ALLOW LOAD BEARING CONCRETE MASONRY UNITS. g. MASONRY WALLS HAVE BEEN DESIGNED USING STRENGTH AND DEFLECTION DESIGN OF REINFORCED UNIT MASONRY ARE DESIGNED ACCORDING TO STATE AND LOCAL BUILDING CODE AND ACI 530 SECTION 3.2.5 28. SPREAD FOOTING AND MISCELLANEOUS FOUNDATIONS FOLLOWING ARE THE DATA NOT RECEIVED FROM GEO TECHNICAL AGENCY. a. GEO TECHNICAL ENGINEER CONSTRUCTION & GEOTECHNICAL MATERIAL TESTING,INC. b. DATE OF REPORT 2019.06.10 c. PROJECT NUMBER18G0238 d. ALLOWABLE SOIL BEARING CAPACIT4000PSF e. A FROST DEPTH OF (-) 1'-6" BE UTILIZED FOR ALL EXTERIOR FOOTINGS IN NON-HEATED SPACE. SPECIAL INSPECTION PLAN 1. GENERAL REQUIREMENTS FOR SPECIAL BUILDING INSPECTIONS: a. BACKGROUND: i. SPECIAL BUILDING INSPECTION SERVICES SHALL BE PROVIDED FOR THIS BUILDING IN ACCORDANCE TO FLORENCE, SOUTH CAROLINA ADMINISTRATIVE CODE AND POLICIES BY STATE LICENSED BUILDING INSPECTOR OR THEIR AUTHORIZED REPRESENTATIVE. THE PURPOSE OF SPECIAL BUILDING INSPECTIONS IS TO OBSERVE THE STRUCTURAL PORTION OF THE CONSTRUCTION WORK TO VERIFY THAT SUCH WORK IS IN SUBSTANTIAL CONFORMANCE WITH THE CONSTRUCTION DOCUMENTS. INSPECTIONS SHALL BE PERFORMED IN ACCORDANCE WITH THIS STRUCTURAL INSPECTION PLAN. SPECIAL BUILDING INSPECTION SERVICES ARE NOT PART OF THE DESIGN SCOPE AND THESE SERVICES SHALL BE UNDER A SEPARATE CONTRACT. b. DEFINITIONS: i. CONSTRUCTION DOCUMENT: PERMITTED PLANS, PROJECT SPECIFICATIONS ASSOCIATED ADDENDA,SUPPLEMENTS, REQUESTS FOR INFORMATION AND ANY DOCUMENTED REVISIONS TO THE STRUCTURAL DRAWINGS AS THEY MAY OCCUR FROM TIME TO TIME. ii. STRUCTURAL INSPECTION PLAN: THE PLAN FILLED FOR PUBLIC RECORD BY THE ENGINEER OF RECORD TO THE ENFORCING AGENCY TO PROVIDE SPECIFIC INSPECTION PROCEDURES AND SCHEDULES. iii. SPECIAL BUILDING INSPECTOR: A REGISTERED PROFESSIONAL ENGINEER WHO MEETS THE QUALIFICATIONS AND STANDARDS AS ESTABLISHED BY THE FLORENCE, SOUTH CAROLINA BOARD OF ENGINEERS AND AS SPECIFIED IN THIS SPECIAL INSPECTION PLAN QUALIFICATION SECTION. iv. AUTHORIZED REPRESENTATIVE: A REPRESENTATIVE OF THE SPECIAL BUILDING INSPECTOR WHO UNDERTAKES INSPECTIONS AND SITE VISITS UNDER THE RESPONSIBLE. CHARGE OF THE SPECIAL BUILDING INSPECTOR AND WHO MEETS THE REQUIREMENTS AND STANDARDS OF THE FLORENCE, SOUTH CAROLINA BOARD OF ENGINEERS AND AS SPECIFIED IN THIS INSPECTION PLAN. THE REPRESENTATIVE SHALL HAVE A MINIMUM OF THREE YEARS OF EXPERIENCE IN INSPECTION OF SIMILAR STRUCTURES AND SHALL HOLD AN EIT CERTIFICATION. c. QUALIFICATIONS: i. SPECIAL BUILDING INSPECTOR: SHALL BE AN ACTIVE FLORENCE, SOUTH CAROLINA REGISTERED PROFESSIONAL ENGINEER. THE SPECIAL BUILDING INSPECTOR SHALL BE CURRENTLY CERTIFIED AS A BUILDING INSPECTOR BY THE FLORENCE, SOUTH CAROLINA BOARD OF ENGINEERS. THE BUILDING INSPECTOR SHALL POSSESS A MINIMUM OF TEN (10) YEARS OF VERIFIABLE EXPERIENCE IN THE INSPECTION OF THE STRUCTURAL SYSTEM BEING USED FOR THE PROJECT. DOCUMENTATION OF THE ABOVE REQUIRED QUALIFICATIONS SHALL BE SUBMITTED TO THE LOCAL ENFORCEMENT AGENCY FOR APPROVAL PRIOR TO COMMENCING WORK. d. RESPONSIBILITIES OF SPECIAL BUILDING INSPECTOR: THE SPECIAL BUILDING INSPECTOR SHALL NOT ACCEPT ANY DUTIES OR RESPONSIBILITIES THAT ARE NORMALLY THOSE OF THE CONTRACTOR, ENFORCEMENT AGENCY, ARCHITECT OF RECORD,OR ENGINEER OF RECORD. IT SHALL BE THE RESPONSIBILITY OF THE SPECIAL BUILDING INSPECTOR TO OBSERVE THE STRUCTURAL PORTION OF THE WORK ONLY AND TO REPORT WHETHER THE STRUCTURE IS BEING BUILT IN CONFORMANCE WITH THE CONSTRUCTION DOCUMENTS AND IF NOT,THE LOCATION AND DESCRIPTION OF ANY DEVIATIONS FROM THE CONSTRUCTION DOCUMENTS AND THE REQUIRED CORRECTIVE ACTION TO BE TAKEN BY THE CONTRACTOR. THE SPECIAL BUILDING INSPECTOR SHALL REPORT THE USE OF MATERIALS, EQUIPMENT, OR WORKMANSHIP WHICH DOES NOT CONFORM TO THE CONSTRUCTION DOCUMENTS OR WHICH MAY CAUSE IMPROPER CONSTRUCTION,AS WELL AS ANY REQUESTS FOR INTERPRETATION FROM THE ARCHITECT OR ENGINEER OF RECORD. THE SPECIAL BUILDING INSPECTOR SHALL ALSO REPORT RECOMMENDED REMOVALS FOR CONSTRUCTION WHICH IS PERFORMED WITHOUT INSPECTION AND NOT CAPABLE OF BEING INSPECTED OR TESTED IN PLACE. THE SPECIAL BUILDING INSPECTOR SHALL BE RESPONSIBLE TO THE OWNER AND ENFORCING AGENCY HAVING JURISDICTION FOR THIS PROJECT. SHALL COOPERATE WITH THE CONTRACTOR AND SHALL REFRAIN FROM DIRECTING CONSTRUCTION PERSONNEL. i. RESPONSIBILITIES OF THE CONTRACTOR: THE CONTRACTOR'S CONTRACTUAL AND STATUTORY OBLIGATIONS ARE IN NO WAY RELIEVED BY THE PRESENCE OF THE SPECIAL BUILDING INSPECTOR. THE CONTRACTOR SHALL BE STRICTLY LIABLE FOR ANY DEVIATION FROM THE CONSTRUCTION DOCUMENTS AND FOR ANY REQUIRED CORRECTIVE ACTIONS THAT ARISE THERE FROM. THE CONTRACTOR SHALL ADVISE THE SPECIAL BUILDING INSPECTOR IN ADVANCE OF CONSTRUCTION SCHEDULES AND PLANNED OPERATION IN ORDER TO ASSURE TIMELY AND APPROPRIATE OBSERVATIONS. A MINIMUM OF TWENTY-FOUR (24) HOURS NOTICE SHALL BE PROVIDED FOR ALL REQUESTED INSPECTIONS. THE CONTRACTOR SHALL COOPERATE WITH AND ASSIST THE SPECIAL BUILDING INSPECTOR, OR HIS AUTHORIZED REPRESENTATIVE,IN PERFORMING HIS INSPECTION DUTIES. THE SPECIAL BUILDING INSPECTOR SHALL HAVE FREE ACCESS TO THE PROJECT AT ALL TIMES. THE CONTRACTOR SHALL, UPON BEING INFORMED BY THE SPECIAL BUILDING INSPECTOR, IMMEDIATELY CAUSE TO ELIMINATE REPORTED DISCREPANCIES AND DEVIATIONS. ii. RESPONSIBILITIES OF THE OWNER: THE OWNER SHALL ARRANGE FOR ALL NECESSARY CONSTRUCTION RECORDS TO BE PROVIDED TO THE SPECIAL BUILDING INSPECTOR IN A TIMELY FASHION. THESE CONSTRUCTION RECORDS, AS A MINIMUM, SHALL CONSIST OF THE CONSTRUCTION DOCUMENTS,RELEVANT SHOP DRAWINGS, APPLICABLE SUBMITTALS, ENGINEERING CONSULTANT REPORTS AND OTHER RELATED ITEMS.	e. PROCEDURES: i. FREQUENCY OF INSPECTIONS: THE SPECIAL BUILDING INSPECTOR SHALL PERFORM SITE VISITS AT A FREQUENCY AS REQUIRED TO CONFIRM THAT INSPECTIONS ARE BEING PERFORMED BY HIMSELF AND/OR HIS AUTHORIZED REPRESENTATIVE(S) IN ACCORDANCE WITH THIS INSPECTION PLAN.THE SPECIAL BUILDING INSPECTOR SHALL PERSONALLY PERFORM A MINIMUM OF NO LESS THAN 15 PERCENT OF THE TOTAL NUMBER OF INSPECTIONS. ii. REPORTING REQUIREMENTS: THE SPECIAL BUILDING INSPECTOR SHALL MAINTAIN A RECORD OF THE PROGRESS, WORKING CONDITIONS, AND ANY OBSERVATIONS OF DEVIATIONS FROM THE CONSTRUCTION DOCUMENTS. EACH REPORT SHALL CONTAIN, AS A MINIMUM, THE PROJECT NAME AND LOCATION, BUILDING PERMIT NUMBER, NAME OF INDIVIDUALS PRESENT, DATE, TIME OF INSPECTION, WEATHER, CONTRACTOR'S NAME, THE NAME OF THE INDIVIDUAL PREPARING THE REPORT, OBSERVATIONS, DEVIATIONS, PRESCRIBED CORRECTIVE ACTIONS AND ANY CHANGES MADE IN THE FIELD. THE SPECIAL BUILDING INSPECTOR SHALL MAINTAIN A DEFICIENCY LOG WITH A REQUIRED CORRECTIVE ACTION COLUMN FOR EACH DEFICIENT ITEM ON A CONTINUING BASIS FOR FOLLOW-UP AND UPDATE IT AS EXCEPTIONS ARE RECTIFIED. AT THE CONCLUSION OF EACH INSPECTION, THE SPECIAL BUILDING INSPECTOR (OR AUTHORIZED REPRESENTATIVE) SHALL IMMEDIATELY INFORM THE CONTRACTOR OF ALL OBSERVED DEFICIENCIES REQUIRING CORRECTION, AND OF SPECIFIC CORRECTIVE ACTIONS THAT ARE REQUIRED. A WRITTEN SIGNED AND SEALED INSPECTION REPORT SHALL BE CREATED FOR EACH INSPECTION THAT IS CONDUCTED. AS A MINIMUM, THESE WRITTEN REPORTS SHALL BE SUBMITTED AT LEAST ONCE A MONTH TO THE FOLLOWING PERSONS/ AGENCIES: CITY BUILDING DEPARTMENT, ARCHITECT, ENGINEER OF RECORD,CONTRACTOR AND OWNER. f. SUBMISSIONS: i. SUBMISSIONS FOR APPROVAL BY SEOR: SUBMISSIONS (I.E. CONCRETE MIX DESIGNS, REINFORCING, PRECAST ELEMENTS, STRUCTURAL STEEL, SHORING/RE-SHORING, MASONRY UNITS, ENGINEERED METAL OR WOOD TRUSSES ETC.) SHALL BE REVIEWED AND APPROVED BY THE CONTRACTOR, ARCHITECT AND ENGINEER OF RECORD AND SHALL BEAR THE SEAL,DATE AND SIGNATURE OF THE SPECIALITY ENGINEER WHEN APPLICABLE PRIOR TO TRANSMITTAL TO THE SPECIAL INSPECTOR FOR HIS USE IN THE INSPECTIONS OF THE STRUCTURE. THE REVIEW OF SUBMISSIONS BY THE SPECIAL INSPECTOR DOES NOT RELIEVE THE CONTRACTOR OR SUBCONTRACTORS OF THEIR OBLIGATIONS OR PERFORMANCE. ii. ALTERNATES: SUBMISSIONS FOR ALTERNATES AS PROVIDED BY THE CONTRACTOR OR DESIGN PROFESSIONALS AND DOCUMENTATION REGARDING ACCEPTANCE OR DENIAL OF ALTERNATES SHALL BE PROVIDED TO THE SPECIAL INSPECTOR AS THEY BECOME AVAILABLE. g. COMPLETION STATEMENT: i. IN ACCORDANCE WITH TINLEY PARK, IL SPECIAL INSPECTOR WILL PREPARE FOLLOWING STATEMENT, SIGNED AND EMBOSSED WITH HIS PROFESSIONAL SEAL: "TO THE BEST OF MY KNOWLEDGE AND BELIEF, STRUCTURAL LOAD-BEARING COMPONENTS WERE CONSTRUCTED IN SUBSTANTIAL ACCORDANCE WITH THE PERMITTED DOCUMENTS AND THE SHORING AND RESHORING PLANS SUBMITTED TO THE "ENFORCING AGENCY." h. LIMITATIONS: i. THIS STRUCTURAL INSPECTION PLAN SPECIFIES MINIMUM REQUIREMENTS ONLY AND MAY BE SUPPLEMENTED BY SPECIAL REQUIREMENTS AS THEY ARE DETERMINED NECESSARY DURING THE COURSE OF THE WORK. THE FOLLOWING SECTIONS OUTLINE THE INDIVIDUAL COMPONENTS OF THE STRUCTURAL INSPECTION PLAN AND ANY SPECIAL SUBMISSION REQUIREMENTS UNIQUE TO THIS PARTICULAR PROJECT. SPECIAL BUILDING INSPECTIONS ARE LIMITED TO STRUCTURAL COMPONENTS ONLY AND SHALL NOT INCLUDE INSPECTION OF ANY SAFETY PROVISIONS AS REQUIRED BY OSHA OR OTHER SAFETY STANDARDS WHICH APPLY DURING THE CONSTRUCTION PERIOD. SPECIAL BUILDING INSPECTIONS SHALL NOT INCLUDE NON-STRUCTURAL COMPONENTS, GLASS, METAL OR WOOD RAILINGS, FIRE PROTECTION, BATHROOM PARTITIONS OR FIXTURES, ROOFING, MECHANICAL/ELECTRICAL SYSTEMS, ARCHITECTURAL COMPONENTS, SITE WORK, OR OTHER ELEMENTS NOT CONTRIBUTING TO THE CAPACITY OF THE STRUCTURAL BUILDING FRAME. THE SPECIAL BUILDING INSPECTOR DOES NOT CERTIFY THAT THE CONSTRUCTION DOCUMENTS ARE, IN THEMSELVES, IN COMPLIANCE WITH THE CURRENT EDITION OF THE APPLICABLE BUILDING CODES. ALL STATEMENTS ISSUED WILL REFER TO COMPLETED WORK BEING IN SUBSTANTIAL ACCORDANCE WITH THE CONSTRUCTION DOCUMENTS RATHER THAN THE APPROPRIATE BUILDING CODE. 2. SPECIAL INSPECTION PLAN - GENERAL INFORMATION: a. SHALLOW FOUNDATION: ISOLATED AND CONTINUOUS FOOTINGS. b. GROUND FLOOR: CONCRETE SLAB ON GRADE. c. FRAME: GROUND TO ROOF LEVEL IS CFS LOAD BEARING WALL OR STRUCTURAL STEEL BEAMS/COLUMNS SUPPORTING HOLLOW CORE PLANK LABS WITH TOPPING SLABS. ROOF IS ALSO HOLLOW CORE PLANK SLAB SYSTEM WITH LIGHT GAUGE METAL PARAPET WALLS ATTACHED TO IT. d. OTHER COMPONENTS: IN-FILL LIGHT GAGE METAL STRUCTURAL COMPONENTS a. CONSTRUCTION SHALL CONFORM TO THE PERMITTED DOCUMENTS AS SUBMITTED TO THE BUILDING DEPARTMENT. STRUCTURAL DRAWINGS AND THE APPLICABLE SPECIFICATIONS SHALL GOVERN THE REQUIREMENTS OF THIS WORK. 3. SUBSURFACE AND FOUNDATIONS: a. SOILS INVESTIGATION: i. THIS BUILDING SHALL HAVE A SOILS INVESTIGATION COMPLETED BY A QUALIFIED TESTING LABORATORY PRIOR TO THE COMMENCEMENT OF FOUNDATION INSTALLATION. OBTAIN A COPY OF A SOILS REPORT, INCLUDING ADDENDUM'S AND/OR TEST BORINGS AS MAY BE APPROPRIATE. SIGNED AND SEALED BY A REGISTERED TINLEY PARK, IL MAINTAIN SAID COPY IN THE SPECIAL INSPECTOR'S FILE. THE SPECIAL INSPECTOR SHALL CONFIRM THAT NOTES REGARDING FOUNDATION PREPARATION AND INSTALLATION CONTAINED WITHIN SUCH SOILS REPORT AND/OR CONTRACT DOCUMENTS PRIOR TO INITIATION OF FOUNDATION OPERATIONS. ii. SPECIAL INSPECTIONS FOR EXISTING SITE SOIL CONDITIONS. FILL PLACEMENT AND LOAD-BEARING REQUIREMENTS SHALL BE AS REQUIRED BY THIS SECTION AND TABLE 1704.7. THE APPROVED GEO TECHNICAL REPORT AND THE CONSTRUCTION DOCUMENTS PREPARED BY THE REGISTERED DESIGN PROFESSIONALS SHALL BE USED TO DETERMINE COMPLIANCE. DURING FILL PLACEMENT, THE SPECIAL INSPECTOR SHALL DETERMINE THAT PROPER MATERIALS AND PROCEDURES ARE USE IN ACCORDANCE WITH THE PROVISIONS OF THE APPROVED GEO TECHNICAL REPORT. b. BACKFILL, COMPACTION AND SURCHARGE PROGRAM: i. A QUALIFIED GEO TECHNICAL CONSULTANT SHALL BE RETAINED TO MONITOR THE SHALLOW FOUNDATIONS, SLAB-ON-GRADE BASE BACKFILL AND COMPACTION OPERATIONS. A REGISTERED TINLEY PARK, IL SIGNED AND SEALED REPORTS SHALL BE SUBMITTED TO THE SPECIAL INSPECTOR. ii. A SIGNED AND SEALED REPORT FROM THE GEO TECHNICAL ENGINEER OF RECORD STATING THAT THE SURCHARGE PROGRAM HAS BEEN SUCCESSFULLY COMPLETED SHALL BE SUBMITTED TO THE SPECIAL INSPECTOR PRIOR TO INITIATION OF FOUNDATION OPERATIONS. c. SHALLOW FOUNDATIONS: i. FOUNDATIONS SHALL BE REVIEWED PRIOR TO AND DURING THE PLACEMENT OF CONCRETE TO CONFIRM COMPLIANCE WITH THE STRUCTURAL DOCUMENTS. ii. VERIFY DOWELS FOR VERTICAL REINFORCING ARE IN PLACE AND ARE IN ACCORDANCE WITH THE STRUCTURAL DRAWINGS. iii. OBSERVE CONCRETE PLACING TO ASSURE THAT METHODS AND MATERIALS BEING USED ARE IN ACCORDANCE WITH THE CONSTRUCTION DOCUMENTS d. SLAB ON GRADE: i. SUB GRADE PREPARATION (BACKFILL, COMPACTION AND OBSERVATION AND VERIFICATION OF COMPACTION TESTING) SHALL BE OBSERVED. ii. OBSERVE PLACEMENT OF SCREEDS TO OBTAIN PROPER LEVEL AND THICKNESS OF SLAB. VERIFY SLAB STEP DOWNS AND DEPRESSIONS TO COMPLY WITH PLAN. iii. VERIFY SIZE, TYPE AND LOCATION OF ALL SLAB REINFORCING INCLUDING LAP AND PROPER PLACEMENT. iv. CHECK AND VERIFY LOCATION AND TIME OF INSTALLATION OF CONTROL AND CONSTRUCTION JOINTS.	4. CONCRETE FORM WORK: a. OBTAINED DETAILED DRAWINGS AND DESIGN CALCULATIONS (SIGNED AND SEALED BY A STATE REGISTERED PROFESSIONAL ENGINEER WITH 3 YEARS EXPERIENCE IN THE DESIGN OF SHORING AND RE-SHORING FOR SIMILAR STRUCTURES) FOR A SHORING AND RESHORING REQUIRED. b. VERIFY FORM WORK IS FREE OF FOREIGN MATERIAL AND LOCATIONS, ALIGNMENT AND DIMENSIONS CONFORM TO THE STRUCTURAL DRAWINGS PRIOR TO PLACING CONCRETE. PERIODICALLY INSPECT SHORING AND RESHORING TO NOTE ANY POTENTIALLY DANGEROUS CONDITIONS. REVIEW SEQUENCE AND REMOVAL PROCEDURES WITH THE APPROVED SHOP DRAWINGS. c. VERIFY LOCATION AND TYPES OF JOINTS AS INDICATED ON THE STRUCTURAL DRAWINGS. d. OBSERVE EXPANSION JOINTS AND EMBEDDED ITEMS FOR TYPE, QUALITY OF FABRICATION AND GENERAL PLACEMENT. e. OBSERVE IN-PLACE CONDITION OF CAST-IN PLACE CONCRETE (CRACKING, SPALLING, HONEY COMBING, ETC.) AND RECORD ANY SIGNIFICANT DEFICIENCIES. f. VERIFY PROPER USAGE OF EXPANSION ANCHORS, CHEMICAL ADHESIVE PRODUCTS FOR ANCHORAGE AND POWDER ACTUATED FASTENERS IN ACCORDANCE WITH MANUFACTURERS RECOMMENDATIONS. OBSERVATION INSTALLATION METHODS TO ENSURE SPECIFICATION COMPLIANCE FOR ANCHOR EMBEDMENT DEPTH, SPACING AND EDGE DISTANCE. 5. REINFORCING STEEL a. VERIFY GRADE, SIZE AND QUANTITY OF SPACING OF REINFORCING BARS FOR COMPLIANCE WITH CONTRACT DOCUMENTS AS WELL AS APPROVED SHOP DRAWINGS. WELD ABILITY OF REINFORCEMENT, EXCEPT THAT WHICH CONFORMS TO ASTM A 706, SHALL BE DETERMINED IN ACCORDANCE WITH THE REQUIREMENTS OF SECTION 3.5.2 OF ACI 318. b. VERIFY ALL STEEL PLACEMENT IS IN ACCORDANCE WITH ACI FOR CLEAR COVER AND THAT IT IS ADEQUATELY SUPPORTED TO RESIST MOVEMENT DURING CONCRETE POUR. c. MILD STEEL REINFORCING SHALL BE FREE OF RUST SCALE, OIL OR MATERIAL THAT MAY INHIBIT CONCRETE BOND AND SHOULD BE CHECKED FOR SIZE, BENDING, GRADE AND SPLICE LENGTH. d. OBSERVE REINFORCING STEEL SIZE, NUMBER, PLACEMENT AND SUPPORT. e. VERIFY ALL SPLICE LOCATIONS AND LAP LENGTHS. REPORT ALL SPLICES AND LAPS THAT ARE NOT IN STRICT ACCORDANCE WITH THE DESIGN DOCUMENTS. f. WELDING INSPECTION AND WELDING INSPECTOR QUALIFICATION FOR REINFORCING STEEL SHALL BE IN ACCORDANCE WITH AWS D1.4 AND ACI 318. 6. OPENINGS: a. GENERAL OPENING LOCATIONS SHALL BE VERIFIED FOR SIZE, LOCATION AND REINFORCED AS INDICATED ON THE STRUCTURAL DRAWINGS. b. OPENINGS SHALL NOT INTERFERE WITH OR INTERRUPT SCHEDULED REINFORCING WITHOUT THE APPROVAL OF THE STRUCTURAL ENGINEER 7. EMBEDDED FIXTURES: a. VERIFY EMBEDDED ITEMS ARE IN PLACE AND GENERALLY LOCATED DIMENSIONALLY AS INDICATED ON THE APPROVED SHOP DRAWINGS. ANCHOR BOLTS, INSERTS, SLEEVES, CONDUITS, OR OTHER EMBEDDED FIXTURES ARE CONSIDERED SECONDARY ELEMENTS AND SHALL NOT INTERFERE OR INTERRUPT PRIMARY SCHEDULED REINFORCING UNLESS APPROVED BY THE STRUCTURAL ENGINEER. 8. STRUCTURAL STEEL: a. THE SPECIAL INSPECTIONS FOR STEEL ELEMENTS OF BUILDINGS AND STRUCTURES SHALL BE AS REQUIRED BY SECTION 1705.2.1 b. ENSURE PROPER USE OF APPROVED STRUCTURAL STEEL MATERIALS AND PRODUCTS BY VERIFYING ASTM IDENTIFICATION MARKINGS AND INSPECTING MANUFACTURER'S CERTIFICATE OF COMPLIANCE. c. CHECK THE INSTALLATION OF ALL COLUMN BASE PLATES FOR PROPER LEVELING, GROUT TYPE AND GROUT PLACEMENT. d. VISUALLY CHECK PLUMBNESS AND ALIGNMENT (USING ADEQUATE TOOLS FOR VERIFICATION) AS ERECTION PROGRESSES. e. CHECK ALL REQUIRED CAMBER AGAINST APPROVED SHOP DRAWINGS AND CONTRACT DOCUMENTS. f. VISUALLY INSPECT 100% OF THE STEEL CONNECTIONS TO VERIFY COMPLIANCE WITH APPROVED SHOP DRAWINGS AND CONTRACT DOCUMENTS. g. INSPECT HIGH STRENGTH BOLTED CONNECTIONS FOR COMPLIANCE WITH CONTRACT DOCUMENTS. h. INSPECT WELDED CONNECTIONS USING THE APPLICABLE NON-DESTRUCTIVE TECHNIQUES NECESSARY TO ENSURE PROJECT COMPLIANCE. VERIFY WELDER CERTIFICATIONS. i. INSPECT METAL DECK WELDS AND ROOF DECK WELDS. j. INSPECT STEEL FRAME JOINT DETAILS SUCH AS BRACING AND STIFFENING, MEMBER LOCATIONS AND APPLICATION OF JOINT DETAILS AT CONNECTIONS FOR COMPLIANCE WITH PROJECT REQUIREMENTS 9. BOLTING a. INSTALLATION OF HIGH-STRENGTH BOLTS SHALL BE INSPECTED IN ACCORDANCE WITH AISC 360. b. WHILE THE WORK IS IN PROGRESS, THE SPECIAL INSPECTOR SHALL DETERMINE THAT THE REQUIREMENTS FOR BOLTS, NUTS, WASHERS AND PAINT; BOLTED PARTS AND INSTALLATION AND TIGHTENING IN SUCH STANDARDS ARE MET. FOR BOLTS REQUIRING PRE TENSIONING, THE SPECIAL INSPECTOR SHALL OBSERVE THE PRE INSTALLATION TESTING AND CALIBRATION PROCEDURES WHEN SUCH PROCEDURES ARE REQUIRED BY THE INSTALLATION METHOD OR BY PROJECT PLANS OR SPECIFICATIONS; DETERMINE THAT ALL PLIES OF CONNECTED MATERIALS HAVE BEEN DRAWN TOGETHER AND PROPERLY SNUGGED AND MONITOR THE INSTALLATION OF BOLTS TO VERIFY THAT THE SELECTED PROCEDURE FOR INSTALLATION IS PROPERLY USED TO TIGHTEN BOLTS. FOR JOINTS REQUIRED TO BE TIGHTENED ONLY TO THE SNUG-TIGHT CONDITION, THE SPECIAL INSPECTOR NEED ONLY VERIFY THAT THE CONNECTED MATERIALS HAVE BEEN DRAWN TOGETHER AND PROPERLY SNUGGED. c. MONITORING OF BOLT INSTALLATION FOR PRE TENSIONING IS PERMITTED TO BE PERFORM ON A PERIODIC BASIS WHEN USING THE TURN-OF-NUT METHOD WITH MATCH MARKING TECHNIQUES, THE DIRECT TENSION INDICATOR METHOD OR THE ALTERNATE DESIGN FASTENER (TWIST-OFF BOLT) METHOD. JOINTS DESIGNATED AS SNUG TIGHT NEED BE INSPECTED ONLY ON A PERIODIC BASIS. d. MONITORING OF BOLT INSTALLATION FOR PRE TENSIONING USING THE CALIBRATED WRENCH METHOD OR THE TURN-OF-NUT METHOD WITHOUT MATCH MARKING SHALL BE PERFORMED ON A CONTINUOUS BASIS. e. REFERENCE TABLE BELOW FOR ADDITIONAL REQUIREMENTS. 10. CONCRETE PLACEMENT: a. ENSURE THAT THE TESTING LABORATORY TECHNICIANS ARE AWARE OF SCHEDULING CONCRETE PLACEMENT AND TESTING REQUIREMENTS. b. IN THE ABSENCE OF SUFFICIENT DATA OR DOCUMENTATION PROVIDING EVIDENCE OF CONFORMANCE TO QUALITY STANDARDS FOR MATERIALS IN CHAPTER 3 OF ACI 318, THE BUILDING OFFICIAL SHALL REQUIRE TESTING OF MATERIALS IN ACCORDANCE WITH THE APPROPRIATE STANDARDS AND CRITERIA FOR THE MATERIAL IN CHAPTER 3 OF ACI 318. c. INSPECTING ALL TRANSIT MIX DELIVERY SLIPS TO VERIFY CORRECT MIX DESIGNS AS WELL AS ELAPSED TIME BETWEEN PLAN AND DEPOSIT OF CONCRETE.	d. VERIFY SLUMP IS WITHIN THE LIMITS OF THE PROJECT DOCUMENTS. e. VERIFY THAT THE CONCRETE TEST CYLINDERS ARE TAKEN IN ACCORDANCE WITH THE CONTRACT DOCUMENTS. f. OBSERVE CONVEYING AND DEPOSITING OF CONCRETE TO ENSURE PROPER PLACEMENT TECHNIQUES (FOR ALL CONCRETE POURS) INCLUDING THE SHORING AND FORM WORK. g. OBSERVE IN-PLACE CONDITION OF CAST-IN PLACE CONCRETE (CRACKING, SPALLING, HONEYCOMBING, ETC.) AND RECORD ANY SIGNIFICANT DEFICIENCIES. h. OBSERVE AND VERIFY PROPER CURING AND POST PLACEMENT PROTECTION PROVISIONS. i. OBSERVE AND VERIFY PROPER IMPLEMENTATION AND USE OF CORROSION INHIBITING ADMIXTURES. j. OBSERVE PLACEMENT OF LIGHTWEIGHT CONCRETE FOR COMPLIANCE WITH PROJECT SPECIFICATIONS. k. REVIEW RESULTS OF FIELD TESTED CONCRETE TEST CYLINDERS WITH THE TESTING LABORATORY TO CHECK COMPLIANCE. l. REFERENCE TABLE BELOW FOR ADDITIONAL REQUIREMENTS.
---	--	--	---

ABBREVIATIONS:

ABV	ABOVE	LDT	LIGHT AND DRAPERY TROUGH
AFF	ABOVE FINISHED FLOOR	LT	LIGHT TROUGH
AP	ACCESS PANEL	LTL	LINTEL
AC	ACOUSTICAL	LVL	LEVEL
ADD	ADDENDUM	LVR	LOUVER
ADJ	ADJACENT	MH	MANHOLE
ALT	ALTERNATE	MFR	MANUFACTUR (ER)
ALUM	ALUMINUM	MO	MASONRY OPENING
ARCH	ARCHITECT (URAL)	MAT	MATERIAL
BASMT	BASEMENT	MAX	MAXIMUM
BRG	BEARING	MECH	MECHANIC (AL)
BVL	BEVELED	MC	MEDICINE CABINET
BIT	BITUMINUOUS	MMB	MEMBRANE
BLK	BLOCK	MTL	METAL
BKLG	BLOCKING	M	METER (S)
BOT	BOTTOM	MM	MILLIMETER (S)
BLDG	BUILDING	MIN	MINIMUM
CPT	CARPET (ED)	MIR	MIRROR
CSMT	CASEMENT	MISC	MISCELLANEOUS
C	CAULK (ING)	MULL	MULLION
CLG	CEILING	NAT	NATURAL
CT	CERAMIC TILE	NR	NOISE REDUCTION
CFA	COLUMN FROM ABOVE	NOM	NOMINAL
CLR	CLEAR	NIC	NOT IN CONTRACT
COL	COLUMN	NTS	NOT TO SCALE
CONC	CONCRETE	OPG	OPENING
CMU	CONCRETE MASONRY UNIT	OPP	OPPOSITE
CONST	CONSTRUCTION	OPH	OPPOSITE HAND
CONT	CONTINUOUS	OH	OVERHEAD
CJT	CONTROL JOINT	PR	PAIR
CPR	COPPER	PK	PARKING
CUST	CUSTOM	PVMT	PAVEMENT
DT	DRAERY TROUGH	PFA	POST FROM ABOVE
DTL	DETAIL	PL	PLASTIC LAMINATE
DIM	DIMENSION	PT	POINT
DR	DOOR	PSF	POUNDS PER SQUARE FOOT
DWG	DRAWING	PSI	POUNDS PER SQUARE INCH
DF	DRINKING FOUNTAIN	PL	PROPERTY LINE
ELEC	ELECTRIC (AL)	QT	QUARRY TILE
EL	ELEVATION (S)	REF	REFERENCE
ELEV	ELEVATOR	REFR	REFRIGERATOR
EQ	EQUAL	REINF	REINFORCE (D), (ING)
EXH	EXHAUST	REQD	REQUIRED
EXG	EXISTING	RES	RESILIENT
EXT	EXTERIOR	REV	REVISION (D), (ING)
FOC	FACE OF CONCRETE	REVS	REVERSE
FOF	FACE OF FINISH	RH	RIGHT HAND
FOM	FACE OF MASONRY	RHR	RIGHT HAND REVERSE
FOS	FACE OF STUDS	R	RISER
FIN	FINISH (ED)	R&S	ROD AND SHELF
FFL	FINISHED FLOOR LEVEL	RD	ROOF DRAIN
FE	FIRE EXTINGUISHER	RDT	RECESSED DRAPERY TRACK
FDC	FIRE DEPARTMENT CONNECTION	RFG	ROOFING
FHC	FIRE HOSE CONNECTION	RM	ROOM
FEC	FIRE EXTINGUISHER CABINET	RO	ROUGH OPENING
FPL	FIREPLACE	R/S	ROUGH SAWN
FP	FIREPROOFING, SPRAYED	S	SEALANT (EXTERIOR)
FLG	FLASHING	SHTG	SHEATHING
FLR	FLOOR (ING)	SM	SHEET METAL
FD	FLOOR DRAIN	SIM	SIMILAR
FTG	FOOTING	SC	SOLID CORE
FDTN	FOUNDATION	SPEC	SPECIFICATION (S)
FBO	FURNISHED BY OTHERS	SQ	SQUARE
FPHB	FREEZE PROOF HOSE BIB	STD	STANDARD
FUR	FURRED (ING)	ST	STAIN
GA	GAUGE	STL	STEEL
GALV	GALVANIZED	SD	STORM DRAIN
GC	GENERAL CONTRACT (OR)	STR	STRUCTURAL
GL	GLASS, GLAZING	TEL	TELEPHONE
GYP BD	GYPSUM BOARD	TV	TELEVISION
HB	HOSE BIB	THR	THRESHOLD
HDW	HARDWARE	T&G	TONGUE AND GROOVE
HDR	HEADER	TS	TOP OF SLAB
HT	HEATING	TSL	TOP OF STEEL
HC	HOLLOW CORE	TW	TOP OF WALL
HM	HOLLOW METAL	TB	TOWEL BAR
HOR	HORIZONTAL	TR	TRANSOM
HWH	HOT WATER HEATER	T	TREAD
INCL	INCLUDE (D), (ING)	TYP	TYPICAL
ID	INSIDE DIAMETER	UNO	UNLESS NOTED OTHERWISE
IBC	INSTALLED BY CONTRACTOR	VB	VAPOUR BARRIER
IBO	INSTALLED BY OWNER	VIF	VERIFY IN FIELD
INS	INSULATE (D), (ION)	VERT	VERTICAL
INT	INTERIOR	VCT	VINYL COMPOSITION
JC	JANITOR'S CLOSET	WC	WATER CLOSET
KIT	KITCHEN	WP	WATERPROOFING
LAM	LAMINATE (D)	WWF	WELDED WIRE FABRIC
LAV	LAVATORY	W	WIDTH, WIDE
LH	LEFT HAND	WDW	WINDOW
LHR	LEFT HAND REVERSE	WO	WITHOUT
L	LENGTH	WD	WOOD

JS

ARCHITECTS

9726 E. 42nd St. Suite 153, Tulsa, 74146

918.640.6800 - jmarrford@jax.com

COPYRIGHT 2020, John Sanford

DEVELOPED BY

HI-TECH HOSPITALITY

Residence INN

BY HARRIOTT

RESIDENCE INN BY HARRIOTT

NW CORNER OF PINE & MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECT'S AND ENGINEER'S SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION.

TULSA AIRPORT RIBM

61208

Project Number

No.	Description	Date


6-08-2026

NOT VALID FOR CONSTRUCTION UNLESS SIGNED IN THIS BLOCK

SHEET

S105

STRUCTURAL NOTES

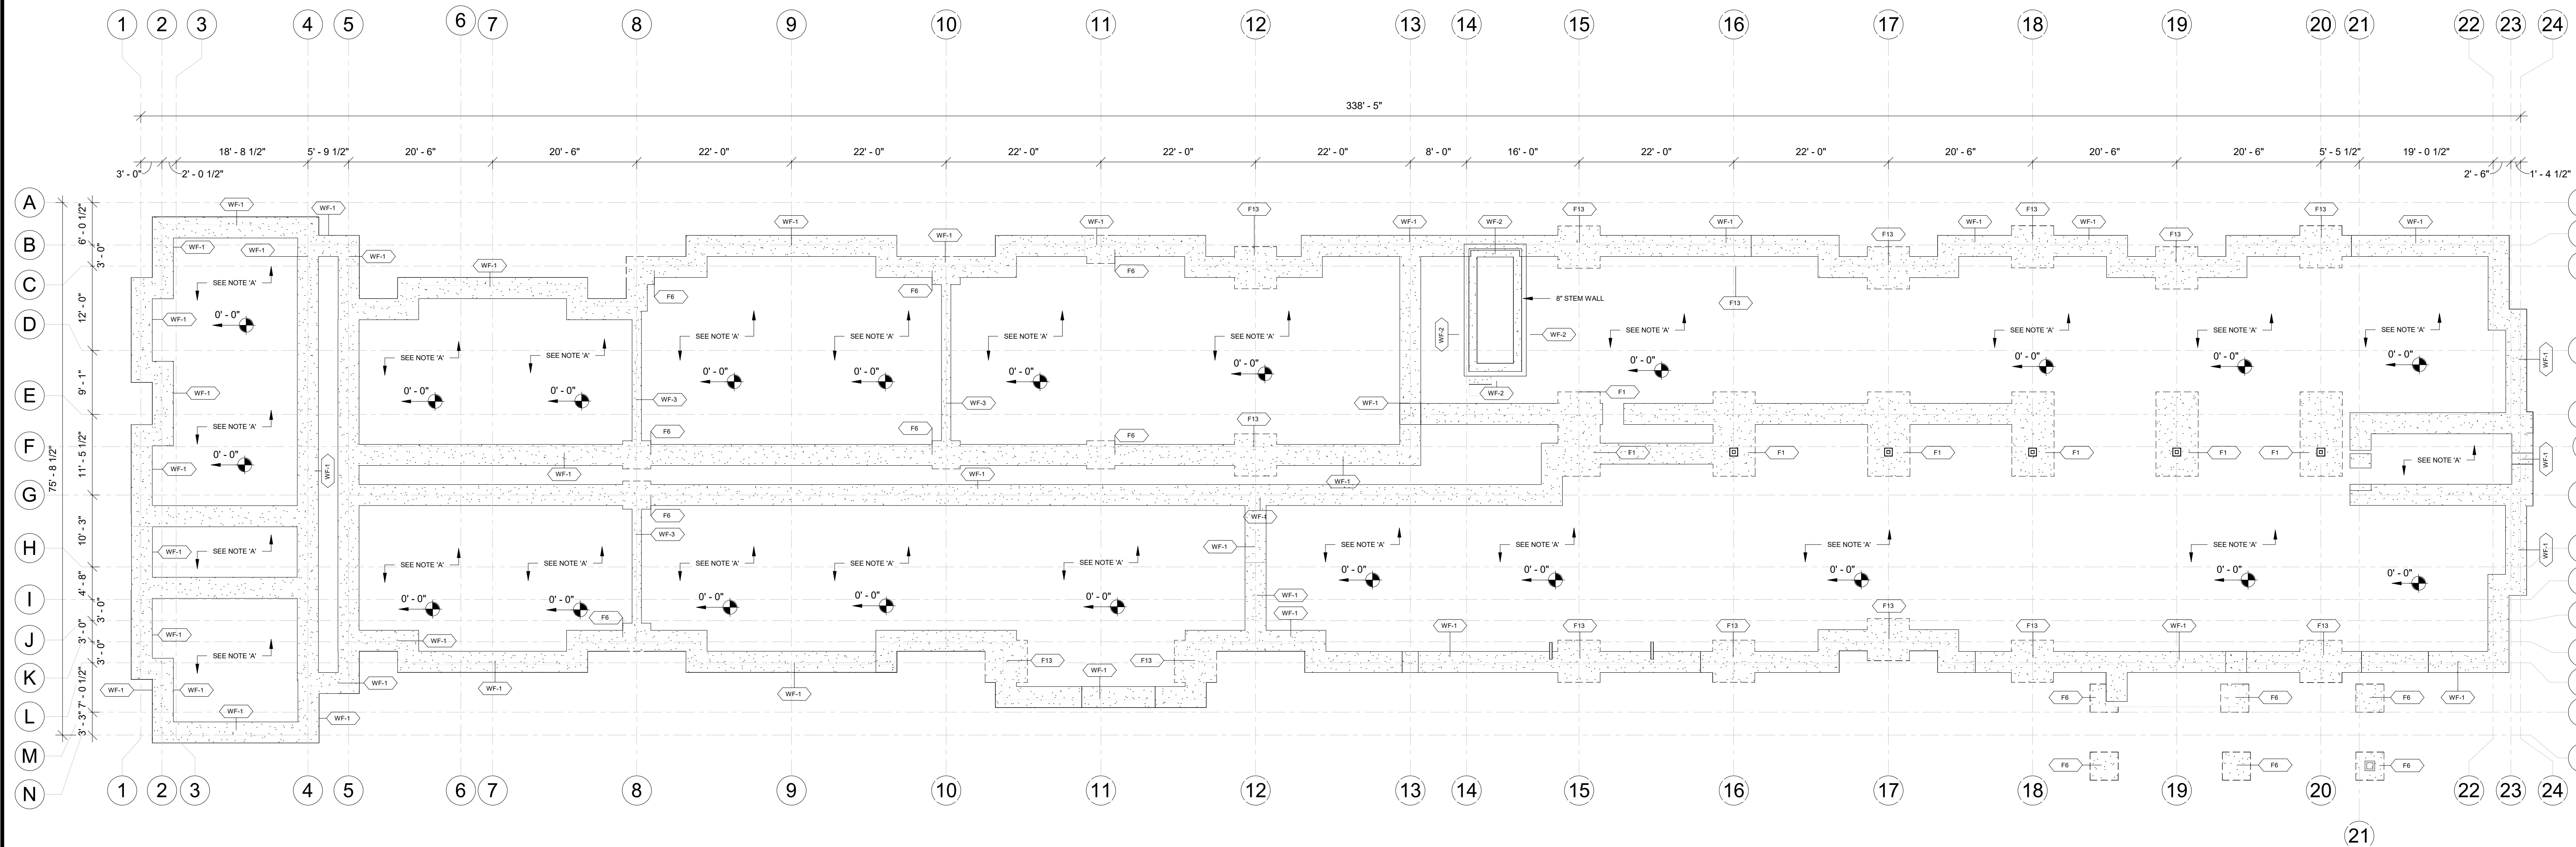

1 FOUNDATION PLAN
3/32" = 1'-0"

FOUNDATION NOTES:

- ALL SLAB-ON GRADE FLOOR SHALL BE 4" THICK 3000 PSI CONC. SLAB WITH 6X6 W6x6 W2.9x2.9 OVER A 10 MIL. POLY VAPOR BARRIER.
- VERIFY ALL DIMENSIONS W/ARCHITECTURAL BEFORE BEGINNING CONSTRUCTION.
- DIMENSION ON ARCHITECTURAL DRAWINGS SHALL TAKE PRECEDENT DIMENSION ON STRUCTURAL DRAWINGS.
- REFER TO ARCH. DRAWINGS FOR OPENING DIMENSIONS NOT SHOWN ON PLAN.
- THE CENTROID OF COLUMN & THEIR FOOTINGS SHALL BE COINCIDENT U.N.O.
- TOP OF S.O.G. ELEVATION: AS SHOWN IN PLAN.
- COORDINATE FLOOR OUTLETS PLUMBING SERVICE AND UNDER GRAOUND ELECTRICAL CONDUIT WITH PLUMBING AND ELECTRICAL CONTRACTOR.
- BEARING CAPACITY OF SOIL IS 1500 psf.
- TOP OF FOOTING TO BE BELOW THE FROST DEPTH OF 10" BELOW GROUND LEVEL OR AS PER SOIL REPORT.
- PROVIDE STEM WALL OF 8" WIDTH & DEPTH MIN. 16" OR DEPTH AS PER SOIL REPORT.
- PROVIDE PADESTAL DEPTH MIN. 16" OR DEPTH AS PER SOIL REPORT.
- CONCRETE COMPRESSIVE STRENGTH AT FOOTING TO BE MINIMUM 4000

NOTE A

4" CONC. SLAB w/6x6-W1.4/W1.4 W.W.F. OVER A MIN. 6" CRUSHED STONE OVER A MIN. 12" LOW P.I. SELECT FILL

FOOTING SCHEDULE					
MARK	TYPE	WIDTH "B"	DEPTH "D"	REINFORCEMENT	DETAIL NO./REMARKS
WF1	WALL FOOTING	3'-0"	2' - 0"	(3) #5 CONT. TOP & BOTTOM & #4 TRANSVERSE REBAR @ 16"O.C	-
WF2	ELEV WALL FOOTING	3'-0"	2' - 0"	(3) #5 CONT. TOP & BOTTOM & #4 TRANSVERSE REBAR @ 16"O.C	-
WF3	WALL FOOTING	1'-4"	2' - 0"	(2) #5 CONT. TOP & BOTTOM & #4 TRANSVERSE REBAR @ 16"O.C	-
F1	CORRIDOR FOOTING	6'-0" x 12'-0"	2' - 0"	(11) #5 ALONG SHORTER SPAN & (21) #5 ALONG LONGER SPAN @ 16"O.C	-
F6	STAIRS COLUMN FOOTING	4'-0" x 4'-0"	2' - 0"	(7) #5 EACH WAY BOTTOM	-
F13	EXTERIOR COLUMN FOOTING	6'-0" x 6'-0"	2' - 0"	(11) #5 EACH WAY BOTTOM	-

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6860 - jharriss@jax.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY
Residence Inn
BY MARRIOTT

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE & MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECT'S AND ENGINEER'S SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION.


No.	Description	Date

TULSA AIRPORT RBM
61208
Project Number

SHEET
S106
FOUNDATION PLAN

6-08-2026

NOT VALID FOR CONSTRUCTION UNLESS SIGNED IN THIS BLOCK

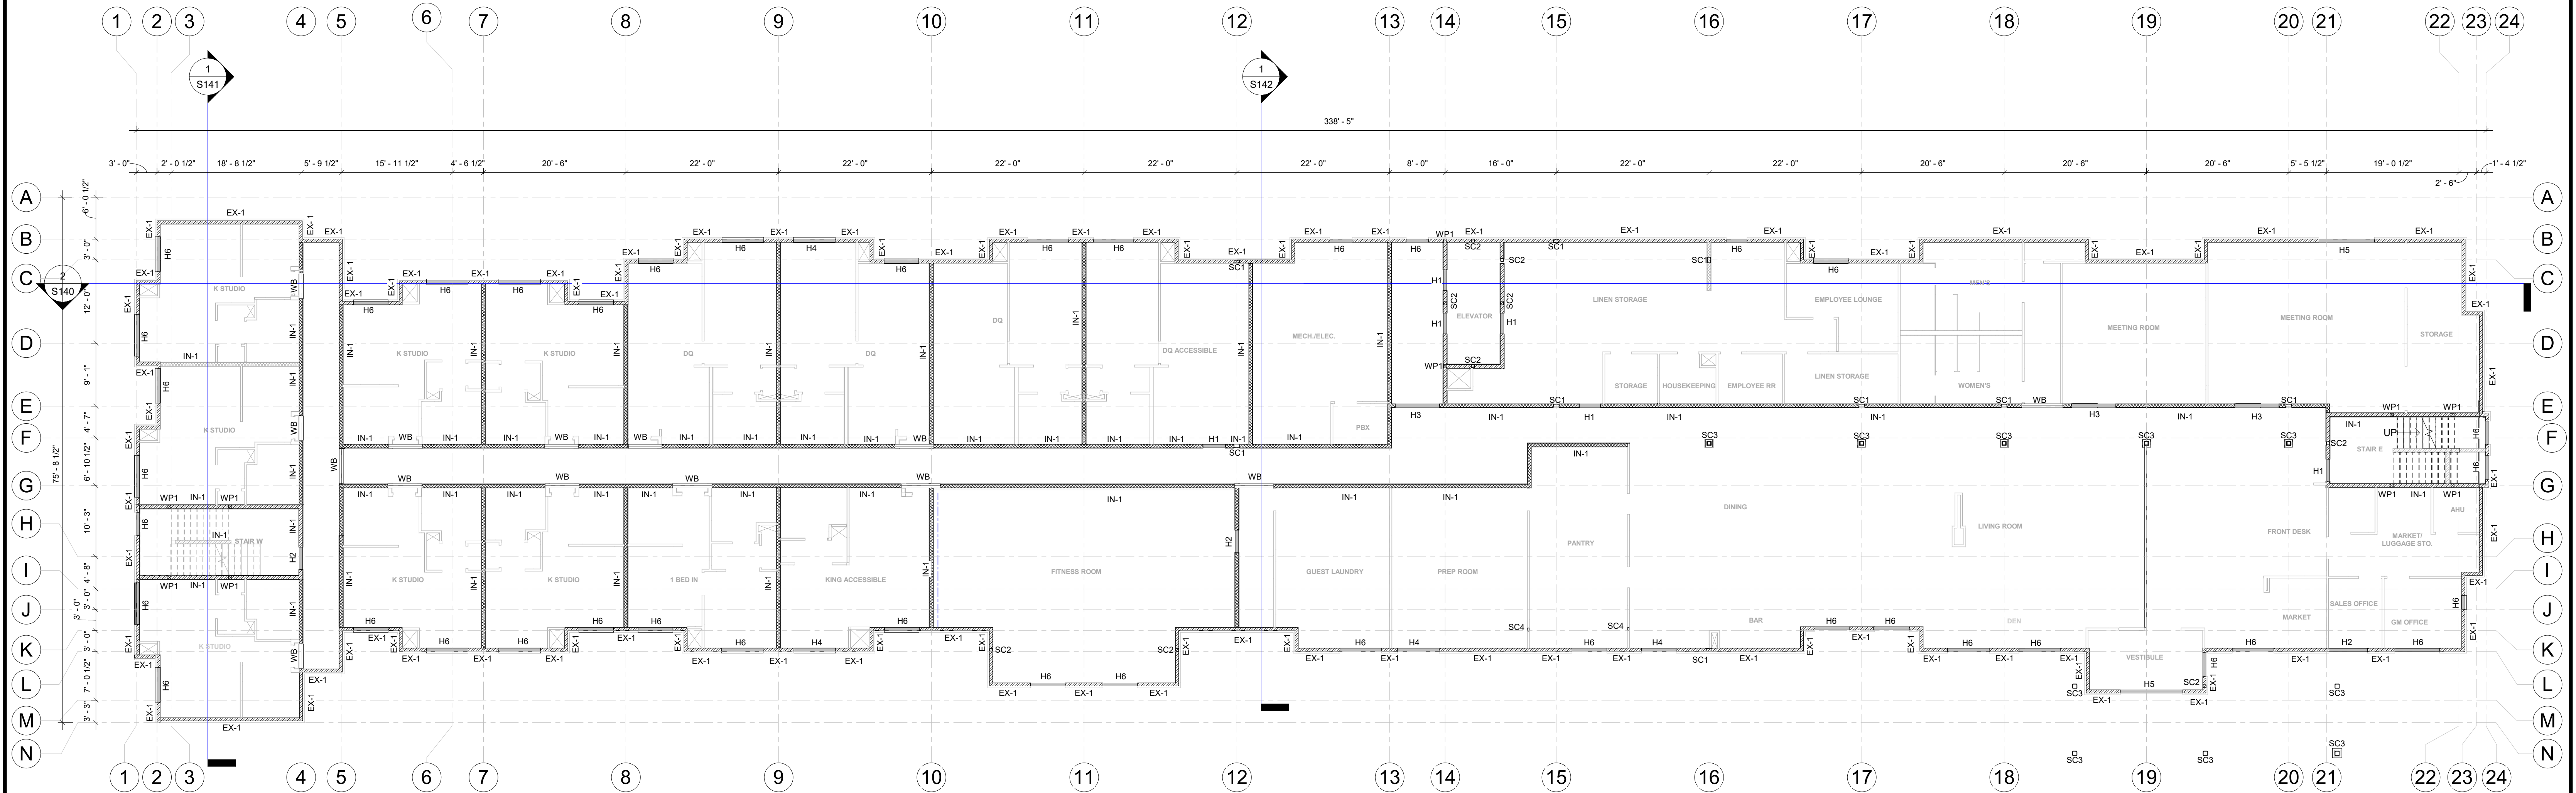

WALL AND COLUMN NOTES

1. REFER TO ARCH & MEP DRAWINGS FOR OPENING DIMENSIONS ON THIS FLOOR.
2. SEE S-108 FOR SHEARWALL CALLOUT AND SCHEDULE.
3. ALL POST SUPPORTING HEADER, BEAM FRAMINGS AT UPPER LEVELS NEEDS TO EXTENDED ALL THE WAY DOWN.
4. SEE THE GENERAL NOTES ON SHEETS S-101, S-102, S-103, S-104 & S-105 FOR ADDITIONAL INFORMATION.
5. ALL POSTS ARE TO MATCH WIDTH AND MATERIAL OF WALL IN WHICH POST OCCURS.
6. IF STRONGER MATERIAL IS DESIGNATED HERE OR ON THE PLANS, THE STRONGER MATERIAL GOVERNS.
7. NON-LOAD BEARING TO BE 2X4 @24" O.C.U.N.O. & 2X6@24"O.C. UNC.

HEADER SCHEDULE

LEVEL	MARK	SIZE	JAMB POST
FIRST FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	3 JACK & 2 KING
	H2	(3) 2 X 6 1 3/4"2.0E MICROLLAM LVL	2 JACK & 2 KING
	H3	(3) 2 X 12 SPF NO. 1/ NO. 2	5 X 7 1.8 PARALLAM PSL
	H4	(3) 2 X 8 1 3/4"2.0E MICROLLAM LVL	2 JACK & 2 KING
	H5	(3) 2 X 10 1 3/4"2.0E MICROLLAM LVL	2 JACK & 2 KING
	H6	(3) 2 X 10 SPF NO. 1/ NO. 2	2 JACK & 2 KING
SECOND FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	3 JACK & 2 KING
	H2	(3) 2 X 10 SPF NO. 1/ NO. 2	2 JACK & 2 KING
	H3	(3) 2 X 12 SPF NO. 1/ NO. 2	5 X 6 1/4" 1.8 PARALLAM PSL
THIRD FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	2 JACK & 1 KING
	H2	(3) 2 X 10 SPF NO. 1/ NO. 2	2 JACK & 1 KING
	H3	(3) 2 X 12 SPF NO. 1/ NO. 2	4 JACK & 3 KING
FOURTH FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	2 JACK & 1 KING
	H2	(3) 2 X 10 SPF NO. 1/ NO. 2	1 JACK & 1 KING
	H3	(3) 2 X 10 SPF NO. 1/ NO. 2	3 JACK & 2 KING

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING

STEEL COLUMN AND BEAM SCHEDULE

MARK	SIZE	COLUMN/ BEAM	GRADE
SC1	HSS 10x5x3/8	COLUMN	Fy = 36 Ksi
SC2	HSS 5-1/2X5-1/2X3/8	COLUMN	Fy = 36 Ksi
SC3	HSS8X8X5/8	COLUMN	Fy = 36 Ksi
SC4	HSS6X3X1/2	COLUMN	Fy = 36 Ksi
SB1	HSS20X8X5/8"	BEAM	Fy = 50 Ksi
SB2	W18X71	BEAM	Fy = 50 Ksi
SB3	W6X15	BEAM	Fy = 50 Ksi
SB4	W10X19	BEAM	Fy = 50 Ksi

FIRST FLOOR WOOD WALL SCHEDULE

MARK	SIZE	GRADE	SPACING	QUANTITY	COMMENTS	BLOCKING
EXW1	2X6	DF NO.2	16" O.C.	1	-	MID POINT BLOCKING
INW2	2X6	DF NO.1/NO.2	16" O.C.	1	-	MID POINT BLOCKING

2 FIRST FLOOR WALL LAYOUT
3/32" = 1'-0"

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jhmanford@aia.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY
Residence Inn
BY MARRIOTT

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE & MEMORIAL, TULSA, OK


THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECTS AND ENGINEERS SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION

No.	Description	Date

TULSA AIRPORT RIBM
61208
Project Number

SHEET
S107
FIRST FLOOR WALL LAYOUT PLAN

6-08-2026
NOT VALID FOR CONSTRUCTION UNLESS SIGNED IN THIS BLOCK

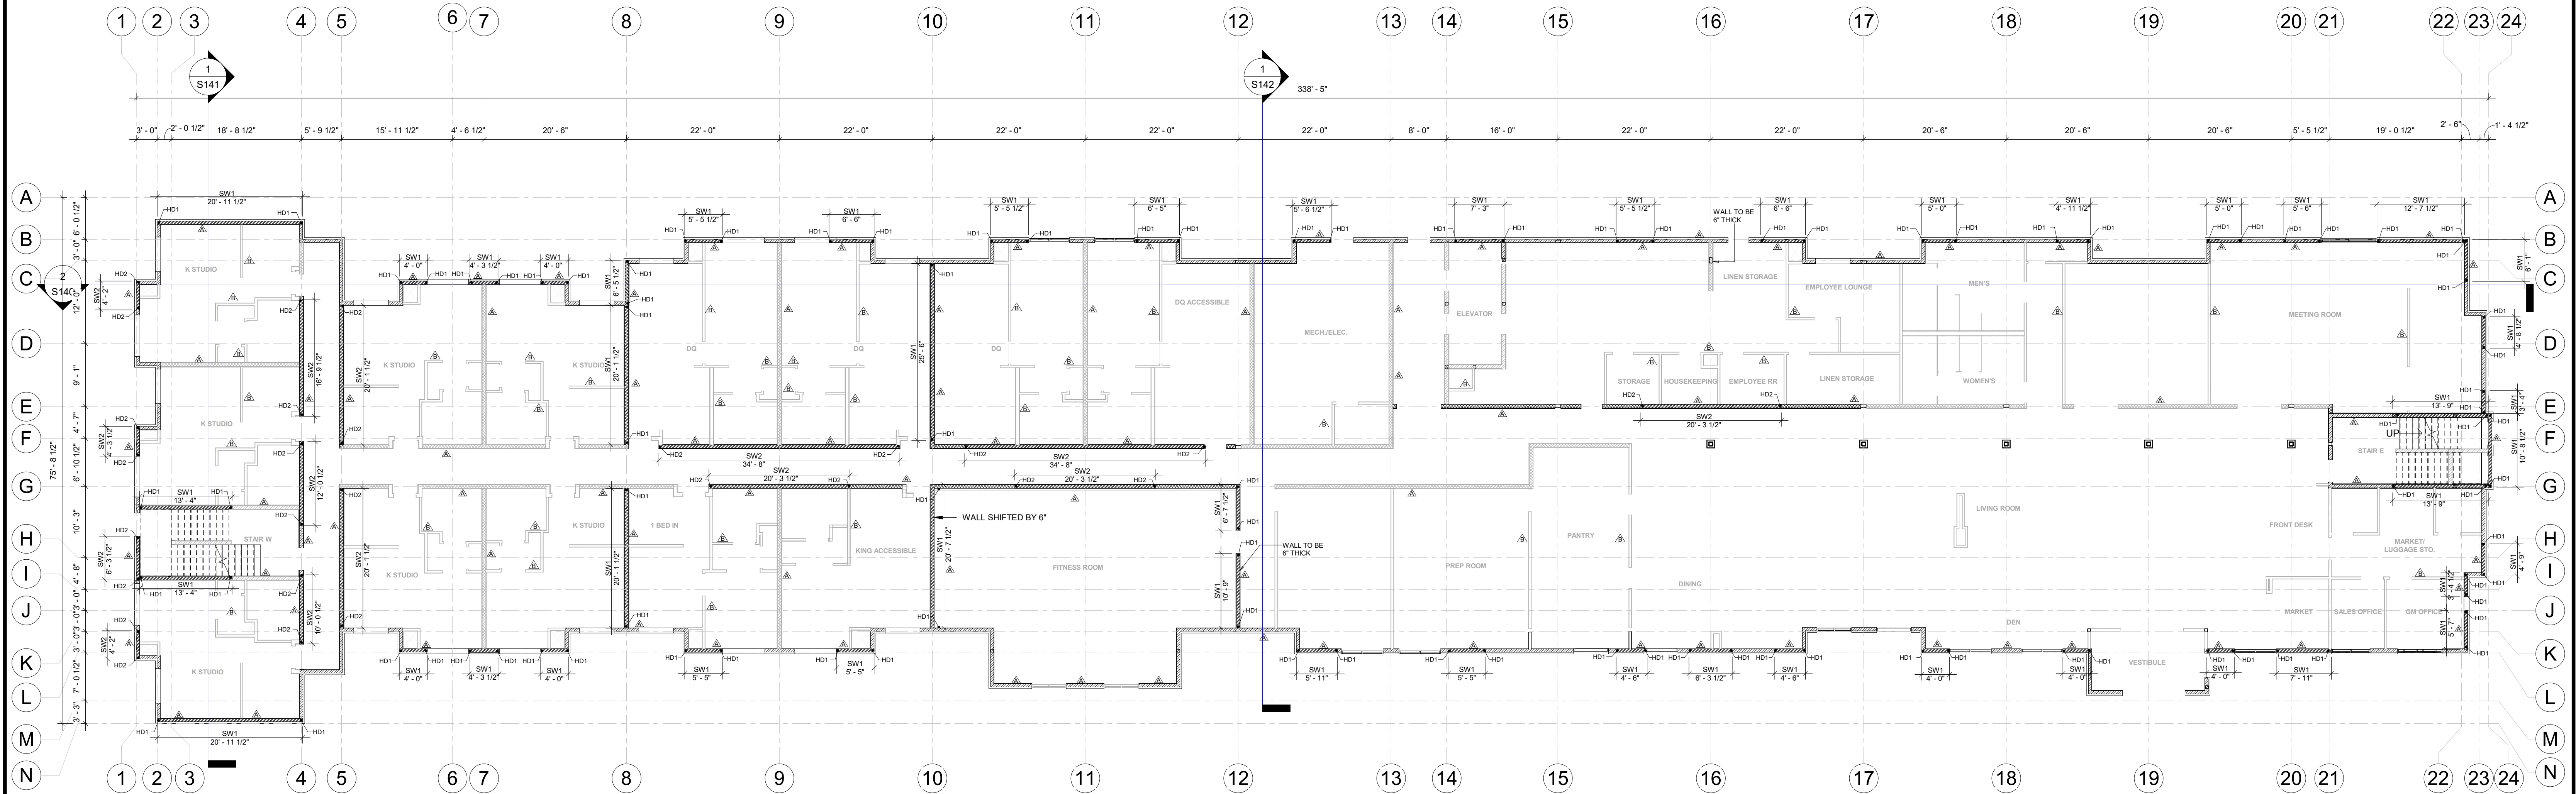

2 FIRST FLOOR SHEAR WALL LAYOUT
3/32" = 1'-0"

NOTE:

- UNLESS NOTED OTHERWISE, FASTEN SHEATHING AS SW-2.
- SHEAR WALL ENDS TO HAVE A HOLD-DOWN OR A UPLIFT CONNECTOR HTT4 U.N.O.
- FLOOR-TO-FLOOR STRAPS AND FDTN HOLDDOWNS SHOWN ON THIS SHEET ARE TO ATTACH TO THE BOTTOM OF THE SHEARWALLS ON THIS SHEET AND EXTEND DOWN TO THE FRAMING OR FOUNDATION BELOW.
- REFER PRECEDING WALL LAYOUT SHEET FOR WALL TYPE SPECIFICATION.
- SEE THE GENERAL NOTES ON SHEETS S101, S102, S103, S104 AND S105 FOR ADDITIONAL INFORMATION
- REFER TO ARCHITECTURAL PLANS FOR ALL DIMENSIONS. CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE STARTING CONSTRUCTION.

ANCHORAGE SCHEDULE

- | | |
|----|---|
| A. | ALL ANCHOR TO BE 1/2 x 4" TITEN HD HEAVY DUTY SCREW @ 48" O.C. WITH PDPA ANCHOR IN BETWEEN TO CONNECT LOAD BEARING WALL BOTTOM PLATE TO CONCRETE. |
| B. | ALL ANCHOR TO BE 0.157 x 1 1/2" PDPA FASTNERS @ 24" O.C. TO CONNECT NON-LOAD BEARING WALL BOTTOM PLATE TO CONCRETE. |

SHEARWALL SHEATHING SCHEDULE (FIRST FLOOR)

MARK	TYPE	THICKNESS	SIDES	NAILING			NOTES
				SIZE	EDGE	FIELD	
SW1	OSB	1/2"	ONE	0.131" X 2 1/2"	4"	12"	-
SW2	OSB	1/2"	ONE	0.131" X 2 1/2"	6"	12"	-

NOTES FOR SHEAR WALLS

- NAILS FOR SW WALLS MAY BE BOX NAILS. NAILS FOR FLOOR AND ROOF TO BE COMMON TYPE.
- WHERE SHEATHING IS APPLIED TO EACH FACE OF WALL AND NAIL SPACING IS LESS THAN 6" O.C., PANEL JOINTS SHALL BE OFFSET TO FALL ON DIFFERENT FRAMING MEMBERS.

HOLD DOWN SCHEDULE

MARK	REQUIRED HOLDOWN & ATTACHMENT	MIN. POST	POST GRADE	ANCHOR BOLT				REMARK
				NAILING	SIZE	EMBEDMENT INTO FOOTING	EDGE DISTANCE	
HD1	HDU14	(4) 2X6	DF NO.1/2	(36) 1/4 X 2 1/2 SDS	1"	-	-	-
HD2	HDU11	(4) 2X6	DF NO.1/2	(30) 1/4 X 2 1/2 SDS	1"	-	-	-

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - hmarford@aia.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY
Residence Inn
BY HARRIOTT

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE & MEMORIAL, TULSA, OK


TULSA AIRPORT RBM
61208
Project Number

THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECTS AND ENGINEERS SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION

No.	Description	Date

SHEET
S108
FIRST FLOOR SHEAR WALL LAYOUT PLAN

6-08-2026
NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

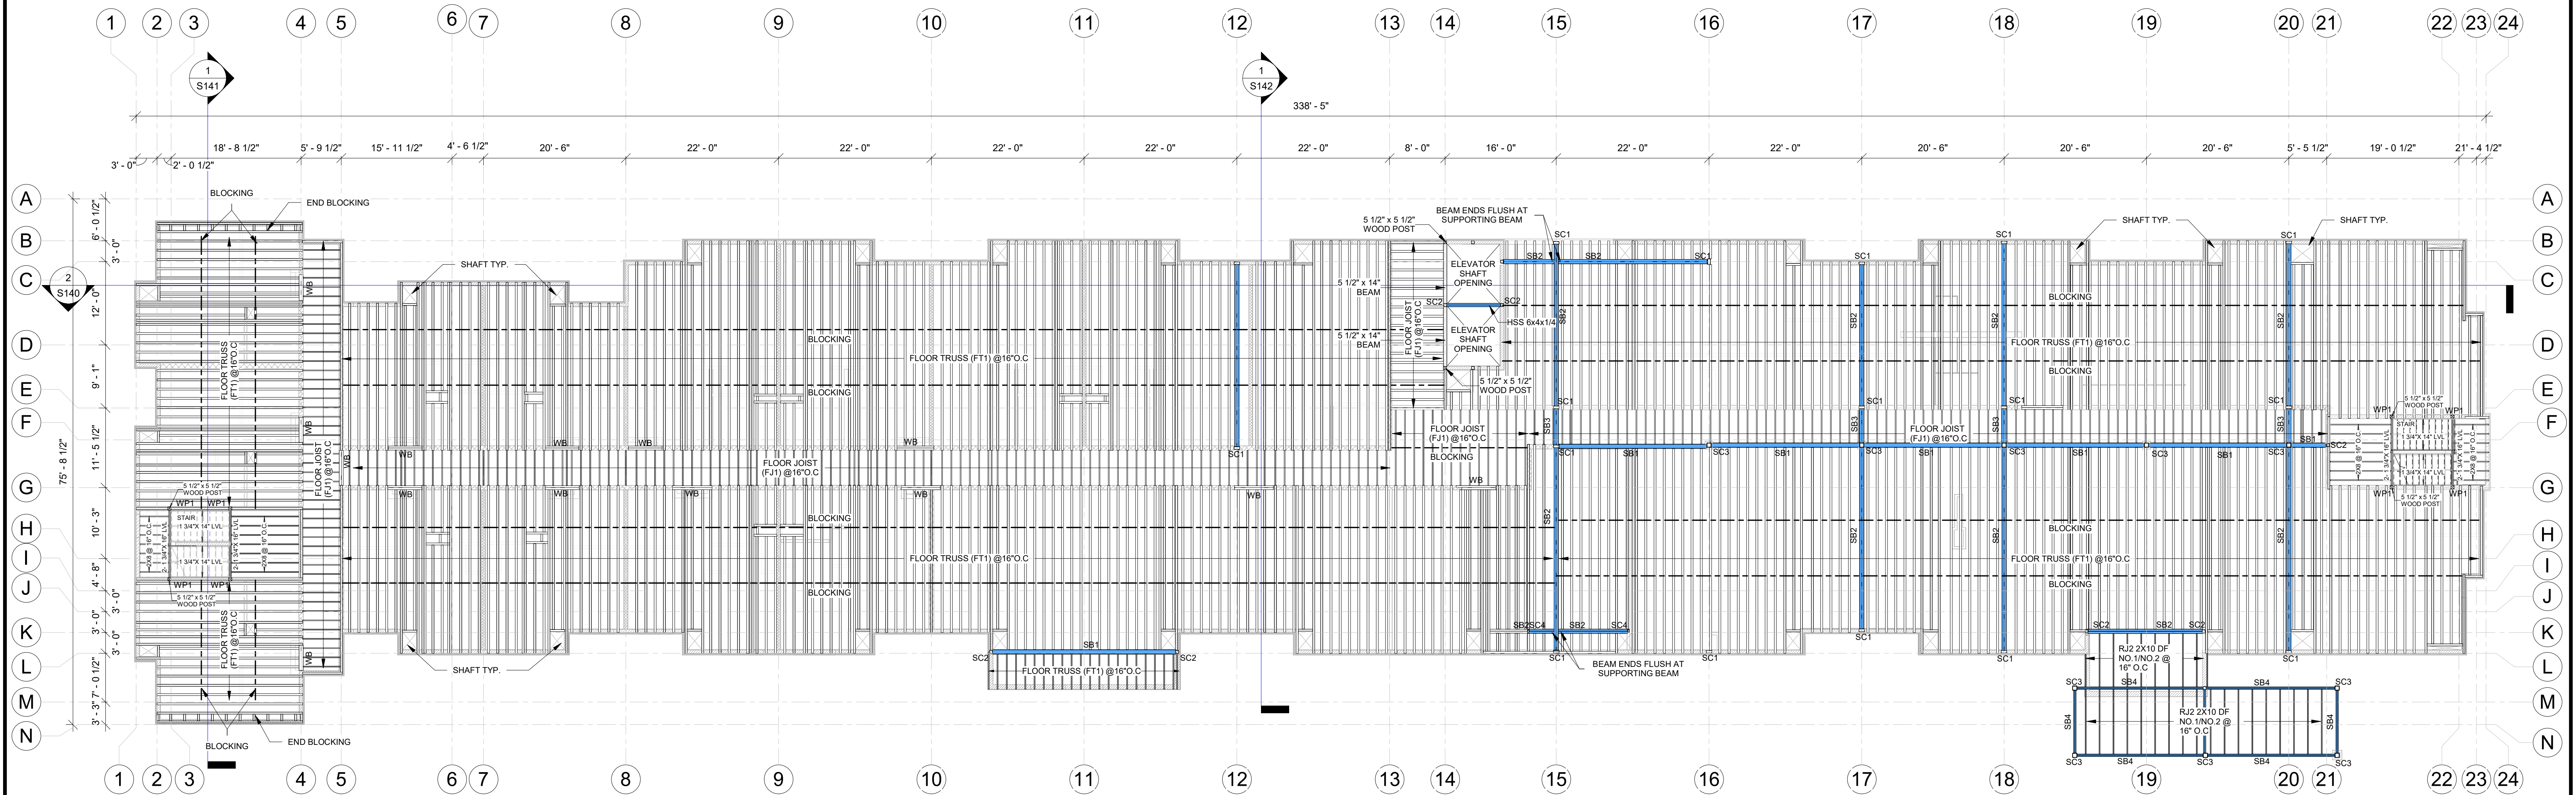

1 SECOND FLOOR FRAMING LAYOUT PLAN
3/32" = 1'-0"

FLOOR FRAMING NOTES

1. REFER TO ARCH & MEP DRAWINGS FOR OPENING DIMENSIONS ON THIS FLOOR.
2. JOIST OR RAFTER FRAMER TO ADJUST THE TRUSS & JOIST LOCATIONS AS NEEDED TO AVOID PLUMBING CONFLICTS BUT IN NO WAY TRUSS OR JOIST TO BE PLACED WITH A SPACING LARGER THAN SPECIFIED.
3. GC TO PROVIDE PRE-FABRICATED RAFTER UNDER NON-BEARING WALLS ALONG GRID LINES WHERE STEEL SUPPORTS OR BEARING WALLS DO NOT OCCUR.
4. ALL RAFTERS/JOIST ARE TWO POINT BEARING U.N.O
5. FLOOR SHEATHING AS PER ARCHITECTURAL.
6. ALL EXTERIOR WALL HEADERS SHALL BE SUPPORTED BY (1) 2X BEARING STUDS U.N.O.
7. SEE THE GENERAL NOTES ON SHEETS S-101, S-102, S-103, S-104 & S-105 FOR ADDITIONAL INFORMATION.
8. ALL POST SUPPORTING HEADER, BEAM FRAMINGS NEEDS TO EXTENDED ALL THE WAY DOWN TO FDTN OR SUPPORTING MEMBER.
9. PROVIDE FLOOR TRUSS OPENING FOR MEP DUCT PASSING.
10. REFER TO ARCHITECTURAL PLANS FOR ALL DIMENSIONS. CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE STARTING CONSTRUCTION.
11. ALL POST COMING FROM ABOVE FLOOR TO HAVE A DBL OR BEAM SUPPORTING.
12. DO NOT SCALE DRAWINGS. RESOLVE ANY DISCREPANCY WITH THE ARCHITECT. NOTIFY STRUCTURAL ENGINEER THROUGH THE ARCHITECT OF ANY VARIATIONS FROM DIMENSIONS AND CONDITIONS SHOWN BY THIS DRAWING.
13. IF STRONGER MATERIAL IS DESIGNATED HERE OR ON THE PLANS, THE STRONGER MATERIAL GOVERNS.

STEEL COLUMN AND BEAM SCHEDULE

MARK	SIZE	COLUMN/ BEAM	GRADE
SC1	HSS 10x5x3/8	COLUMN	Fy = 36 Ksi
SC2	HSS 5-1/2X5-1/2X3/8	COLUMN	Fy = 36 Ksi
SC3	HSS8X8X5/8	COLUMN	Fy = 36 Ksi
SC4	HSS6X3X1/2	COLUMN	Fy = 36 Ksi
SB1	HSS20X8X5/8"	BEAM	Fy = 50 Ksi
SB2	W18X71	BEAM	Fy = 50 Ksi
SB3	W6X15	BEAM	Fy = 50 Ksi
SB4	W10X19	BEAM	Fy = 50 Ksi

SECOND FLOOR WOOD BEAM SCHEDULE

MARK	TYPE	SPECIFICATION		END STUD POST
		TOP & BOTTOM	WEB	
WB	TRUSS	2X6 DF NO.1/NO.2	2X6 DF NO.1/NO.2	(4) 2X6 DF NO.1/NO.2 OR BETTER

WOOD JOIST SCHEDULE

MARK	TYPE	SIZE	O.C.S
FJ1	JOIST	2X6 DF NO.1/NO.2	16"
RJ2	JOIST	2X10 DF NO.1/NO.2	16"

WOOD POST SCHEDULE

MARK	SIZE	GRADE
WP1	5 1/2" x 5 1/2"	DF NO. 1/NO.2

FLOOR TRUSS SCHEDULE

MARK	SPECIFICATION	TOP & BOTTOM	WEB	REMARK	DETAIL REF.
FT1	21 1/2" DEEP WARREN TYPE WEBBED FLOOR TRUSS @16" O.C	2X6 DF NO.1/NO.2	2X6 DF NO.1/NO.2	ALL SUPPORT BEARING VERTICLE MEMBER TO BE OF SIZE MATCHING THE WALL WIDTH	

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jhmanford@aia.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY
Residence Inn
BY HARRIOTT

RESIDENCE INN BY MARRIOTT


NW CORNER OF PINE & MEMORIAL, TULSA, OK

TULSA AIRPORT RBM
61208
Project Number

SHEET
S109
SECOND FLOOR FRAMING LAYOUT PLAN

6-08-2026

NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

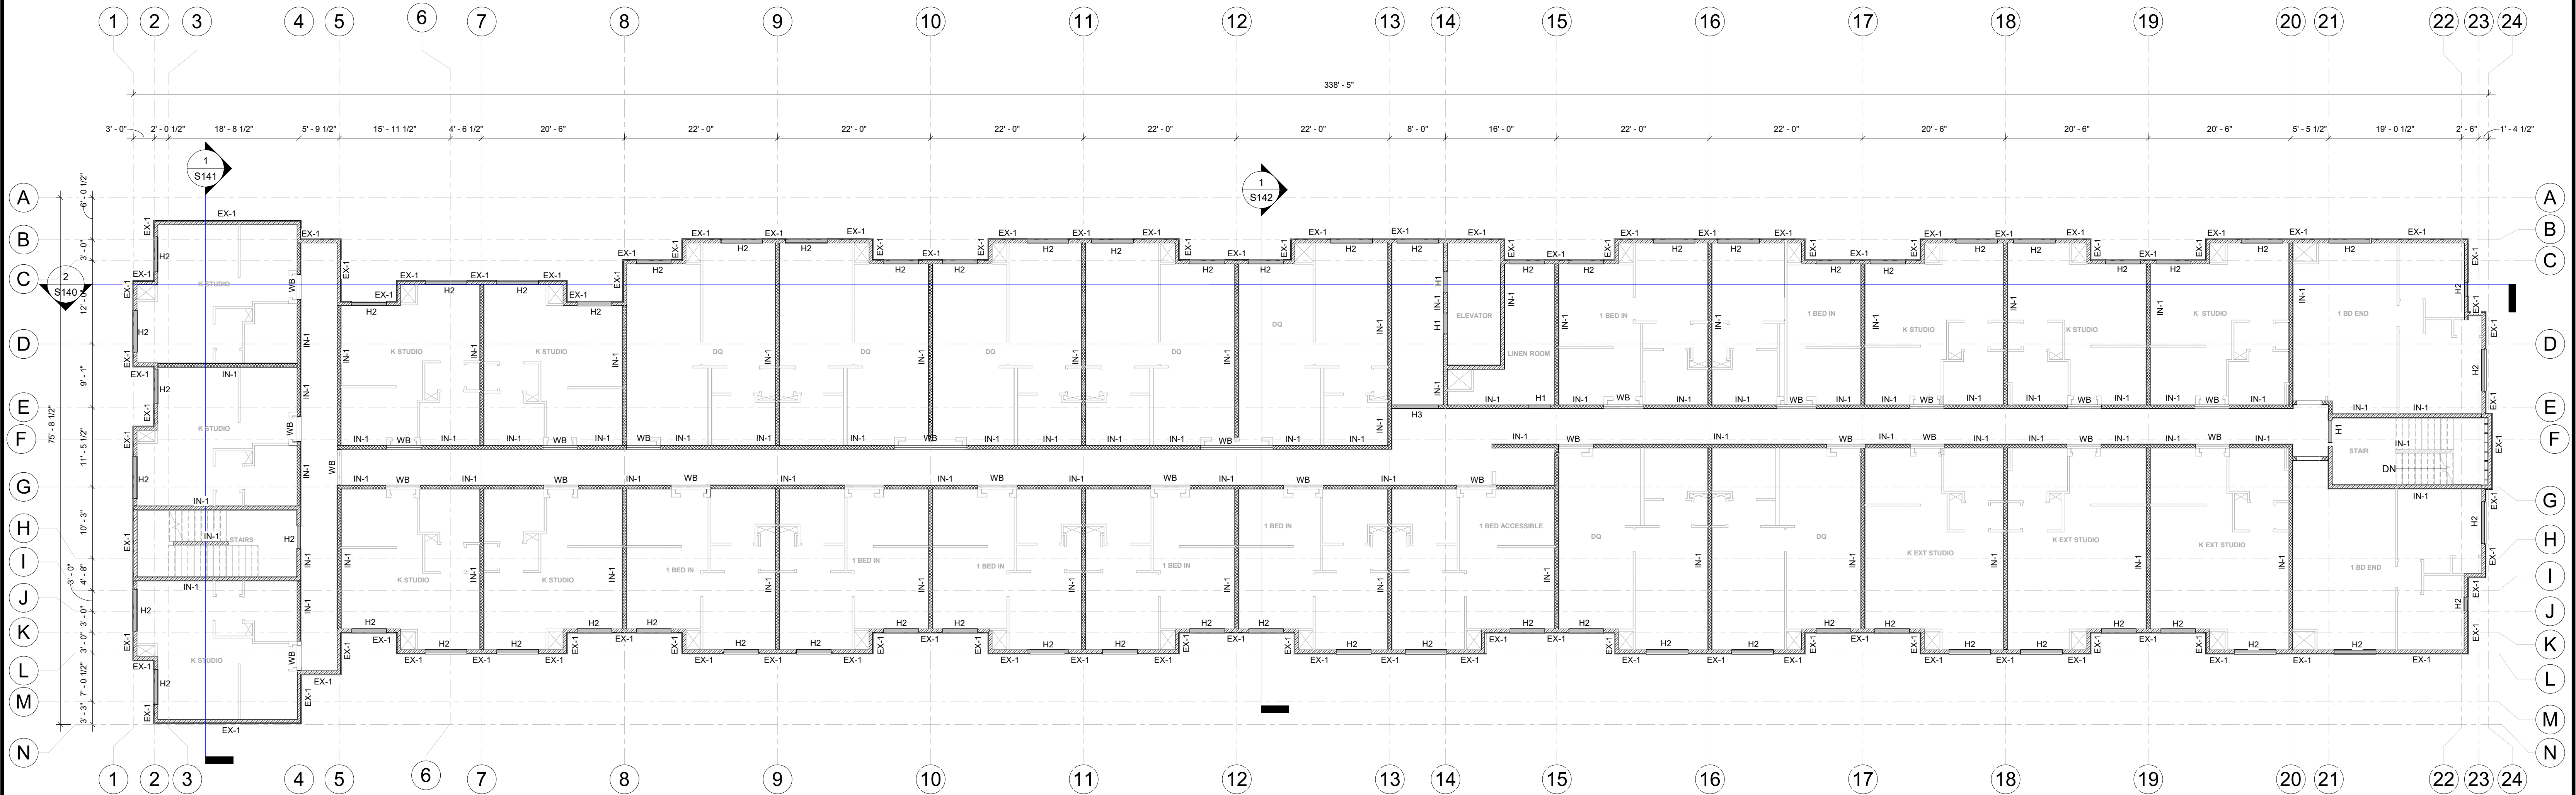

1 SECOND FLOOR WALL LAYOUT PLAN
3/32" = 1'-0"

WALL AND COLUMN NOTES

1. REFER TO ARCH & MEP DRAWINGS FOR OPENING DIMENSIONS ON THIS FLOOR.
2. SEE S-111 FOR SHEARWALL CALLOUT AND SCHEDULE.
3. ALL POST SUPPORTING HEADER, BEAM FRAMINGS AT UPPER LEVELS NEEDS TO EXTENDED ALL THE WAY DOWN.
4. SEE THE GENERAL NOTES ON SHEETS S-101, S-102, S-103, S-104 & S-105 FOR ADDITIONAL INFORMATION.
5. ALL POSTS ARE TO MATCH WIDTH AND MATERIAL OF WALL IN WHICH POST OCCURS.
6. IF STRONGER MATERIAL IS DESIGNATED HERE OR ON THE PLANS, THE STRONGER MATERIAL GOVERNS.
7. NON-LOAD BEARING TO BE 2X4 @24" O.C. U.N.O. & 2X6@24"O.C. UNC.

HEADER SCHEDULE

LEVEL	MARK	SIZE	JAMB POST
FIRST FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	3 JACK & 2 KING
	H2	(3) 2 X 6 1 3/4"2.0E MICROLLAM LVL	2 JACK & 2 KING
	H3	(3) 2 X 12 SPF NO. 1/ NO. 2	5 X 7 1.8 PARALLAM PSL
	H4	(3) 2 X 8 1 3/4"2.0E MICROLLAM LVL	2 JACK & 2 KING
	H5	(3) 2 X 10 1 3/4"2.0E MICROLLAM LVL	2 JACK & 2 KING
	H6	(3) 2 X 10 SPF NO. 1/ NO. 2	2 JACK & 2 KING
SECOND FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	3 JACK & 2 KING
	H2	(3) 2 X 10 SPF NO. 1/ NO. 2	2 JACK & 2 KING
	H3	(3) 2 X 12 SPF NO. 1/ NO. 2	5 X 6 1/4" 1.8 PARALLAM PSL
THIRD FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	2 JACK & 1 KING
	H2	(3) 2 X 10 SPF NO. 1/ NO. 2	2 JACK & 1 KING
	H3	(3) 2 X 12 SPF NO. 1/ NO. 2	4 JACK & 3 KING
FOURTH FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	2 JACK & 1 KING
	H2	(3) 2 X 10 SPF NO. 1/ NO. 2	1 JACK & 1 KING
	H3	(3) 2 X 10 SPF NO. 1/ NO. 2	3 JACK & 2 KING

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING

STEEL COLUMN AND BEAM SCHEDULE

MARK	SIZE	COLUMN/ BEAM	GRADE
SC1	HSS 10x5x3/8	COLUMN	Fy = 36 Ksi
SC2	HSS 5-1/2X5-1/2X3/8	COLUMN	Fy = 36 Ksi
SC3	HSS8X8X5/8	COLUMN	Fy = 36 Ksi
SC4	HSS6X3X1/2	COLUMN	Fy = 36 Ksi
SB1	HSS20X8X5/8"	BEAM	Fy = 50 Ksi
SB2	W18X71	BEAM	Fy = 50 Ksi
SB3	W6X15	BEAM	Fy = 50 Ksi
SB4	W10X19	BEAM	Fy = 50 Ksi

SECOND FLOOR WOOD WALL SCHEDULE

MARK	SIZE	GRADE	SPACING	QUANTITY	COMMENTS	BLOCKING
EXW1	2X6	DF NO.2	16" O.C.	1	-	MID POINT BLOCKING
INW1	2X6	DF NO.2	16" O.C.	1	-	MID POINT BLOCKING

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6860 - jstanford@jax.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY
Residence INN
BY HARRIOTT

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE & MEMORIAL, TULSA, OK


THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECT'S AND ENGINEER'S SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION.

No.	Description	Date

TULSA AIRPORT RBM
61208
Project Number

SHEET
S110
SECOND FLOOR
WALL LAYOUT PLAN

6-08-2026
NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

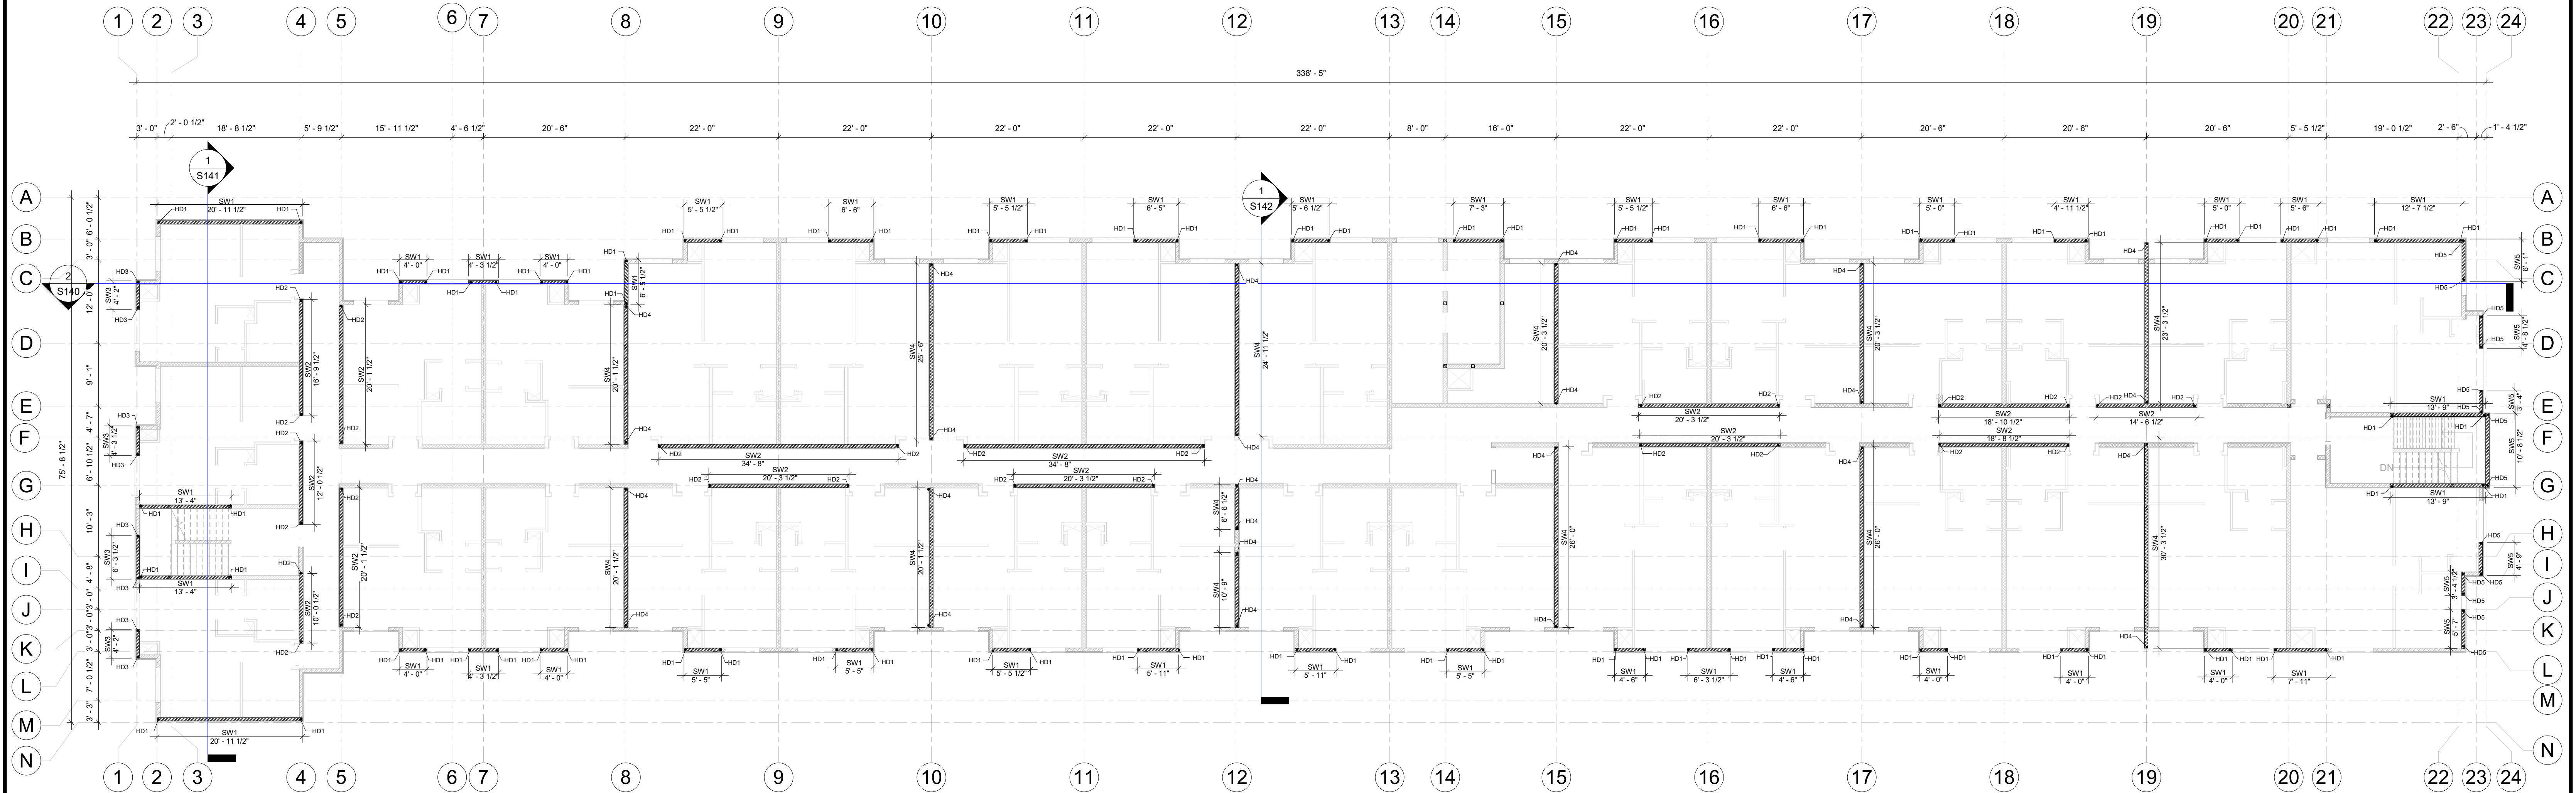

1 SECOND FLOOR SHEAR WALL LAYOUT PLAN
3/32" = 1'-0"

SHEARWALL SHEATHING SCHEDULE (SECOND FLOOR)

MARK	TYPE	THICKNESS	SIDES	NAILING			NOTES
				SIZE	EDGE	FIELD	
SW1	OSB	1/2"	ONE	0.131" X 2 1/2"	3"	12"	-
SW2	OSB	1/2"	ONE	0.131" X 2 1/2"	6"	12"	-
SW3	OSB	1/2"	ONE	0.131" X 2 1/2"	6"	12"	-
SW4	OSB	1/2"	ONE	0.131" X 2 1/2"	4"	12"	-
SW5	OSB	1/2"	ONE	0.131" X 2 1/2"	4"	12"	-

NOTES FOR SHEAR WALLS

1. NAILS FOR SW WALLS MAY BE BOX NAILS. NAILS FOR FLOOR AND ROOF TO BE COMMON TYPE.
2. WHERE SHEATHING IS APPLIED TO EACH FACE OF WALL AND NAIL SPACING IS LESS THAN 6" O.C., PANEL JOINTS SHALL BE OFFSET TO FALL ON DIFFERENT FRAMING MEMBERS.


HOLD DOWN SCHEDULE

MARK	REQUIRED HOLDOWN & ATTACHMENT	MIN. POST	POST GRADE	ANCHOR BOLT				REMARK
				NAILING	SIZE	EMBEDMENT INTO FOOTING	EDGE DISTANCE	
HD1	HDU14	(4) 2X6	DF NO. 1/2	(20) 1/4 X 2 1/2 SDS	1"	-	-	-
HD2	HDU8	(4) 2X6	DF NO. 1/2	(36) 1/4 X 2 1/2 SDS	7/8"	-	-	-
HD3	HDU11	(4) 2X6	DF NO. 1/2	(30) 1/4 X 2 1/2 SDS	1"	-	-	-
HD4	HDU11	(4) 2X6	DF NO. 1/2	(36) 1/4 X 2 1/2 SDS	1"	-	-	-
HD5	HDU8	(4) 2X6	DF NO. 1/2	(36) 1/4 X 2 1/2 SDS	7/8"	-	-	-

NOTE:

1. UNLESS NOTED OTHERWISE, FASTEN SHEATHING AS SW-2.
2. SHEAR WALL ENDS TO HAVE A HOLD-DOWN OR A UPLIFT CONNECTOR HTT4 U.N.O.
3. FLOOR-TO-FLOOR STRAPS AND FDTN HOLDDOWNS SHOWN ON THIS SHEET ARE TO ATTACH TO THE BOTTOM OF THE SHEARWALLS ON THIS SHEET AND EXTEND DOWN TO THE FRAMING OR FOUNDATION BELOW.
4. REFER PRECEEDING WALL LAYOUT SHEET FOR WALL TYPE SPECIFICATION.
5. SEE THE GENERAL NOTES ON SHEETS S101, S102, S103, S104 AND S105 FOR ADDITIONAL INFORMATION
6. REFER TO ARCHITECTURAL PLANS FOR ALL DIMENSIONS. CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE STARTING CONSTRUCTION.

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING



DEVELOPED BY
HI-TECH HOSPITALITY
Residence INN
BY HARRIOTT

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE & MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECTS AND ENGINEERS SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION


No.	Description	Date

TULSA AIRPORT RIBM
61208
Project Number

SHEET
S111
SECOND FLOOR
SHEAR WALL
LAYOUT PLAN

6-08-2026

NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

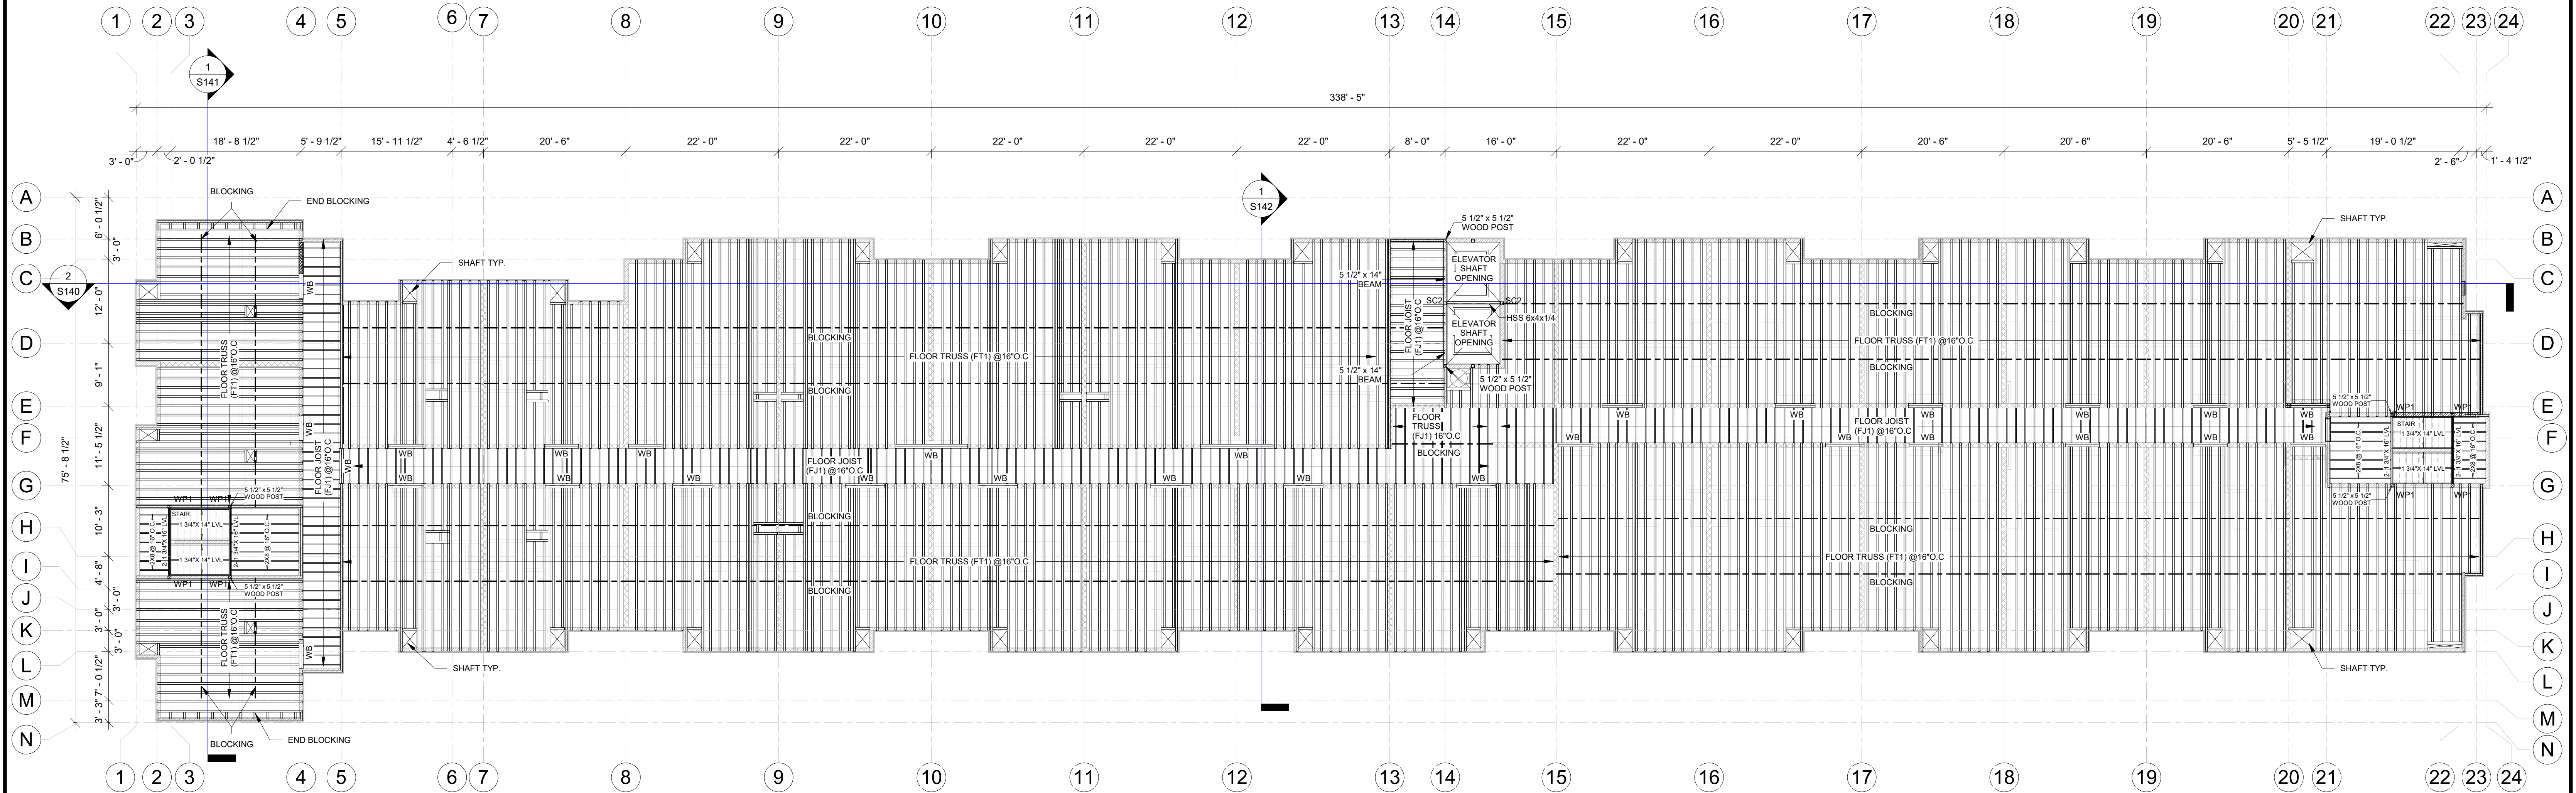

1 THIRD FLOOR FRAMING LAYOUT PLAN
3/32" = 1'-0"

- FLOOR FRAMING NOTES**
- REFER TO ARCH & MEP DRAWINGS FOR OPENING DIMENSIONS ON THIS FLOOR.
 - JOIST OR RAFTER FRAMER TO ADJUST THE TRUSS & JOIST LOCATIONS AS NEEDED TO AVOID PLUMBING CONFLICTS BUT IN NO WAY TRUSS OR JOIST TO BE PLACED WITH A SPACING LARGER THAN SPECIFIED.
 - GC TO PROVIDE PRE-FABRICATED RAFTER UNDER NON-BEARING WALLS ALONG GRID LINES WHERE STEEL SUPPORTS OR BEARING WALLS DO NOT OCCUR.
 - ALL RAFTERS/JOIST ARE TWO POINT BEARING U.N.O
 - FLOOR SHEATHING AS PER ARCHITECTURAL.
 - ALL EXTERIOR WALL HEADERS SHALL BE SUPPORTED BY (1) 2X BEARING STUDS U.N.O.
 - SEE THE GENERAL NOTES ON SHEETS S-101, S-102, S-103, S-104 & S-105 FOR ADDITIONAL INFORMATION.
 - ALL POST SUPPORTING HEADER , BEAM FRAMINGS NEEDS TO EXTENDED ALL THE WAY DOWN TO FDTN OR SUPPORTING MEMBER.
 - PROVIDE FLOOR TRUSS OPENING FOR MEP DUCT PASSING.
 - REFER TO ARCHITECTURAL PLANS FOR ALL DIMENSIONS. CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE STARTING CONSTRUCTION.
 - ALL POST COMING FROM ABOVE FLOOR TO HAVE A DBL OR BEAM SUPPORTING.
 - DO NOT SCALE DRAWINGS. RESOLVE ANY DISCREPANCY WITH THE ARCHITECT.
 - NOTIFY STRUCTURAL ENGINEER THROUGH THE ARCHITECT OF ANY VARIATIONS FROM DIMENSIONS AND CONDITIONS SHOWN BY THIS DRAWING.
 - IF STRONGER MATERIAL IS DESIGNATED HERE OR ON THE PLANS, THE STRONGER MATERIAL GOVERNS.

STEEL COLUMN AND BEAM SCHEDULE			
MARK	SIZE	COLUMN/ BEAM	GRADE
SC1	HSS 10x5x3/8	COLUMN	Fy = 36 Ksi
SC2	HSS 5-1/2X5-1/2X3/8	COLUMN	Fy = 36 Ksi
SC3	HSS8X8X5/8	COLUMN	Fy = 36 Ksi
SC4	HSS6X3X1/2	COLUMN	Fy = 36 Ksi
SB1	HSS20X8X5/8"	BEAM	Fy = 50 Ksi
SB2	W18X71	BEAM	Fy = 50 Ksi
SB3	W6X15	BEAM	Fy = 50 Ksi
SB4	W10X19	BEAM	Fy = 50 Ksi

THIRD FLOOR WOOD BEAM SCHEDULE				
MARK	TYPE	SPECIFICATION		END STUD POST
		TOP & BOTTOM	WEB	
WB	TRUSS	2X6 DF NO.1/NO.2	2X6 DF NO.1/NO.2	(4) 2X6 DF NO.1/NO.2 OR BETTER

WOOD JOIST SCHEDULE			
MARK	TYPE	SIZE	O.C.S
FJ1	JOIST	2X6 DF NO.1/NO.2	16"
RJ2	JOIST	2X10 DF NO.1/NO.2	16"

WOOD POST SCHEDULE		
MARK	SIZE	GRADE
WP1	5 1/2" x 5 1/2'	DF NO. 1/NO.2

FLOOR TRUSS SCHEDULE					
MARK	SPECIFICATION	TOP & BOTTOM	WEB	REMARK	DETAIL REF.
FT1	21 1/2" DEEP WARREN TYPE WEBBED FLOOR TRUSS @16" O.C	2X6 DF NO.1/NO.2	2X6 DF NO.1/NO.2	ALL SUPPORT BEARING VERTICLE MEMBER TO BE OF SIZE MATCHING THE WALL WIDTH	

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING

9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jhmanford@aai.com
COPYRIGHT 2020 John Sanford

6-08-2026
NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

DEVELOPED BY
HI-TECH HOSPITALITY

Residence INN BY MARRIOTT


NW CORNER OF PINE & MEMORIAL, TULSA, OK

TULSA AIRPORT RBM
61208
Project Number

SHEET
S112
THIRD FLOOR FRAMING LAYOUT PLAN

THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECTS AND ENGINEERS SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION

No.	Description	Date

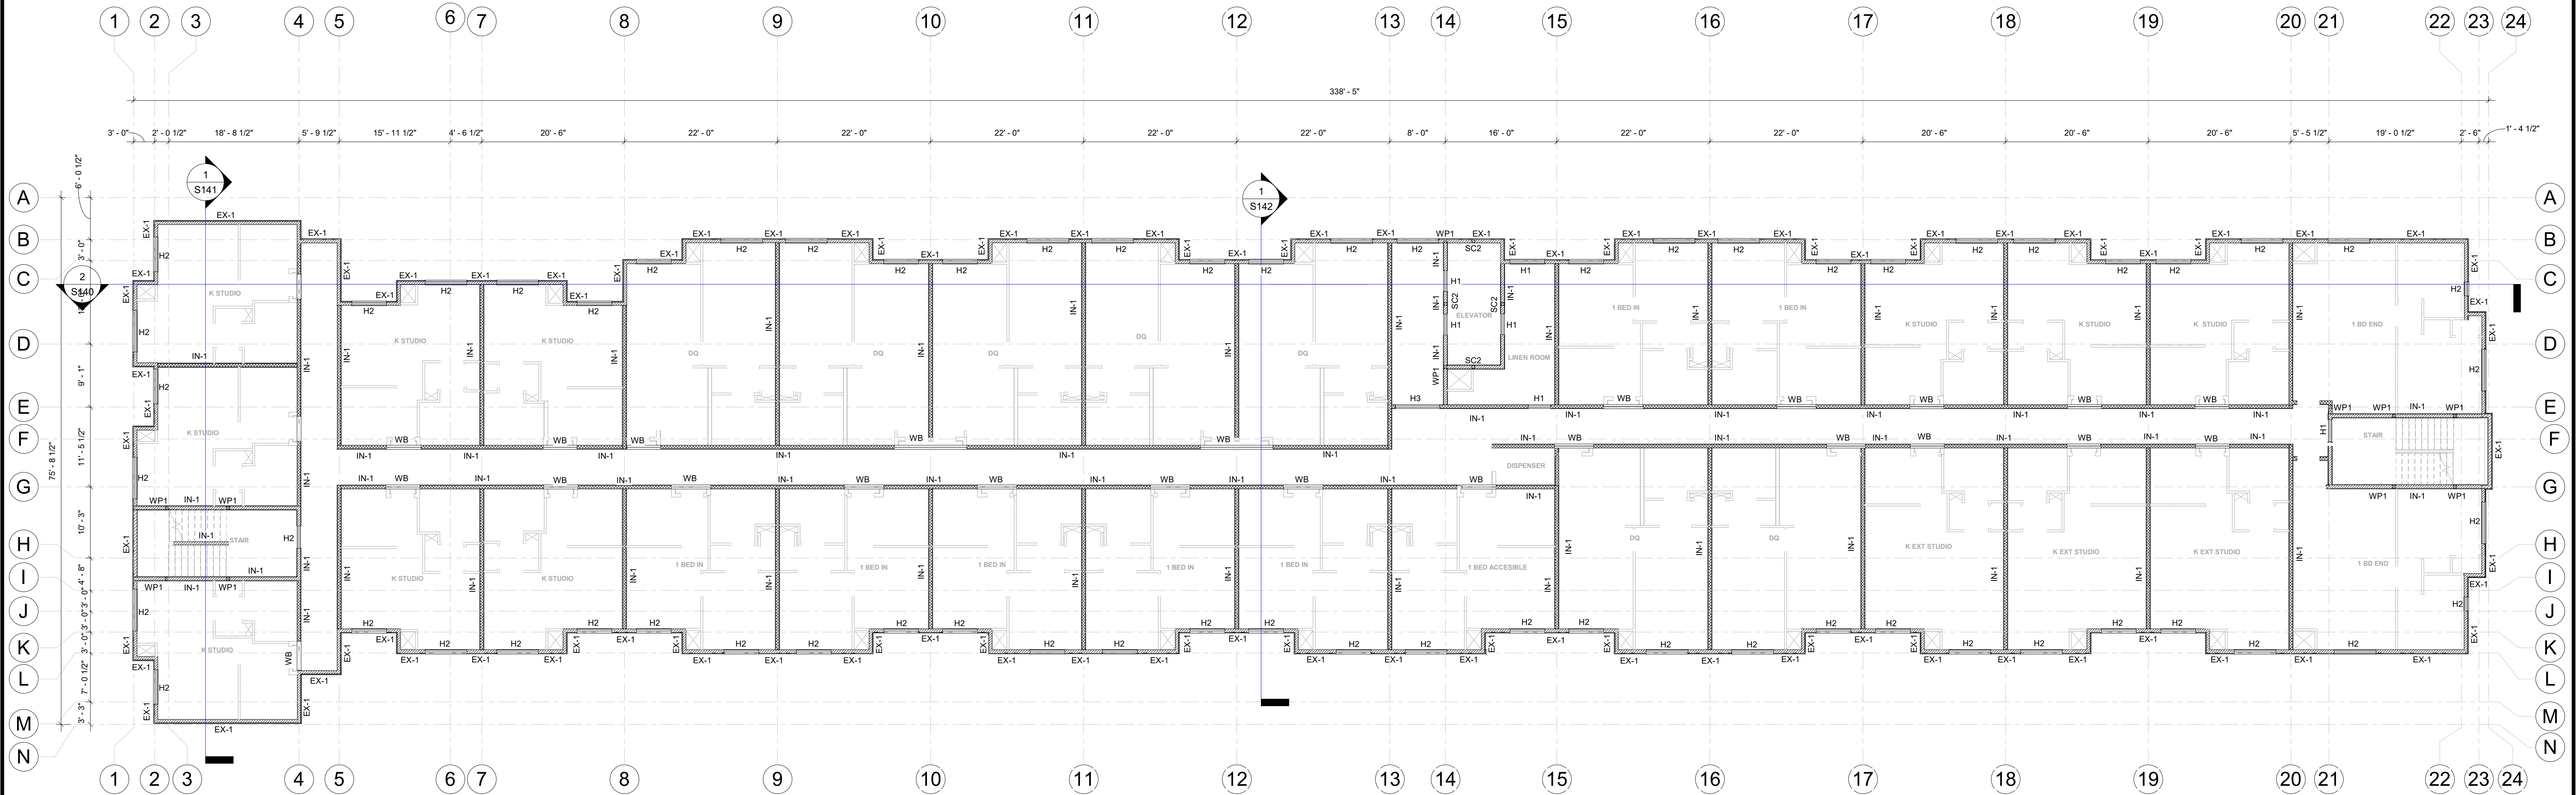

WALL AND COLUMN NOTES

- REFER TO ARCH & MEP DRAWINGS FOR OPENING DIMENSIONS ON THIS FLOOR.
- SEE SHEAR WALL CALLOUT ON SHEET S-117 FOR SHEAR WALL INFORMATION.
- ALL POST SUPPORTING HEADER, BEAM FRAMING NEEDS TO EXTENDED ALL THE WAY DOWN TO FDTN OR SUPPORTING MEMBER.
- SEE THE GENERAL NOTES ON SHEETS S-101,S-102, S-103, S-104 & S-105 FOR ADDITIONAL INFORMATION.
- ALL POSTS ARE TO MATCH WIDTH AND MATERIAL OF WALL IN WHICH POST OCCURS U.N.O.
- IF STRONGER MATERIAL IS DESIGNATED HERE OR ON THE PLANS,THE STRONGER MATERIAL GOVERNS.
- NON-LOAD BEARING TO BE 2X4 @24" O.C U.N.O. & 2X6@ 24"O.C. U.N.O.

HEADER SCHEDULE

LEVEL	MARK	SIZE	JAMB POST
FIRST FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	3 JACK & 2 KING
	H2	(3) 2 X 6 1 3/4"2.0E MICROLLAM LVL	2 JACK & 2 KING
	H3	(3) 2 X 12 SPF NO. 1/ NO. 2	5 X 7 1.8 PARALLAM PSL
	H4	(3) 2 X 8 1 3/4"2.0E MICROLLAM LVL	2 JACK & 2 KING
	H5	(3) 2 X 10 1 3/4"2.0E MICROLLAM LVL	2 JACK & 2 KING
	H6	(3) 2 X 10 SPF NO. 1/ NO. 2	2 JACK & 2 KING
SECOND FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	3 JACK & 2 KING
	H2	(3) 2 X 10 SPF NO. 1/ NO. 2	2 JACK & 2 KING
	H3	(3) 2 X 12 SPF NO. 1/ NO. 2	5 X 6 1/4" 1.8 PARALLAM PSL
THIRD FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	2 JACK & 1 KING
	H2	(3) 2 X 10 SPF NO. 1/ NO. 2	2 JACK & 1 KING
	H3	(3) 2 X 12 SPF NO. 1/ NO. 2	4 JACK & 3 KING
FOURTH FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	2 JACK & 1 KING
	H2	(3) 2 X 10 SPF NO. 1/ NO. 2	1 JACK & 1 KING
	H3	(3) 2 X 10 SPF NO. 1/ NO. 2	3 JACK & 2 KING

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING

STEEL COLUMN AND BEAM SCHEDULE

MARK	SIZE	COLUMN/ BEAM	GRADE
SC1	HSS 10x5x3/8	COLUMN	Fy = 36 Ksi
SC2	HSS 5-1/2X5-1/2X3/8	COLUMN	Fy = 36 Ksi
SC3	HSS8X8X5/8	COLUMN	Fy = 36 Ksi
SC4	HSS6X3X1/2	COLUMN	Fy = 36 Ksi
SB1	HSS20X8X5/8"	BEAM	Fy = 50 Ksi
SB2	W18X71	BEAM	Fy = 50 Ksi
SB3	W6X15	BEAM	Fy = 50 Ksi
SB4	W10X19	BEAM	Fy = 50 Ksi

THIRD FLOOR WOOD WALL SCHEDULE

MARK	SIZE	GRADE	SPACING	QUANTITY	COMMENTS	BLOCKING
EXW1	2X6	DF NO.2	16" O.C.	1	-	MID POINT BLOCKING
INW1	2X6	DF NO.2	16" O.C.	1	-	MID POINT BLOCKING

1 THIRD FLOOR WALL LAYOUT PLAN
3/32" = 1'-0"

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - hnsaiaford@aia.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY
Residence INN
BY HARRIOTT

**RESIDENCE INN BY
MARRIOTT**

NW CORNER OF PINE &
MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR
REVIEW AND PERMITTING. DRAWINGS
ARE NOT TO BE USED FOR
CONSTRUCTION WITHOUT ARCHITECTS
AND ENGINEERS SIGNATURE AND THEIR
DATE OF ISSUE FOR CONSTRUCTION


No.	Description	Date

TULSA AIRPORT RIBM
61208
Project Number

SHEET
S113
THIRD FLOOR WALL
LAYOUT PLAN

6-08-2026

NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

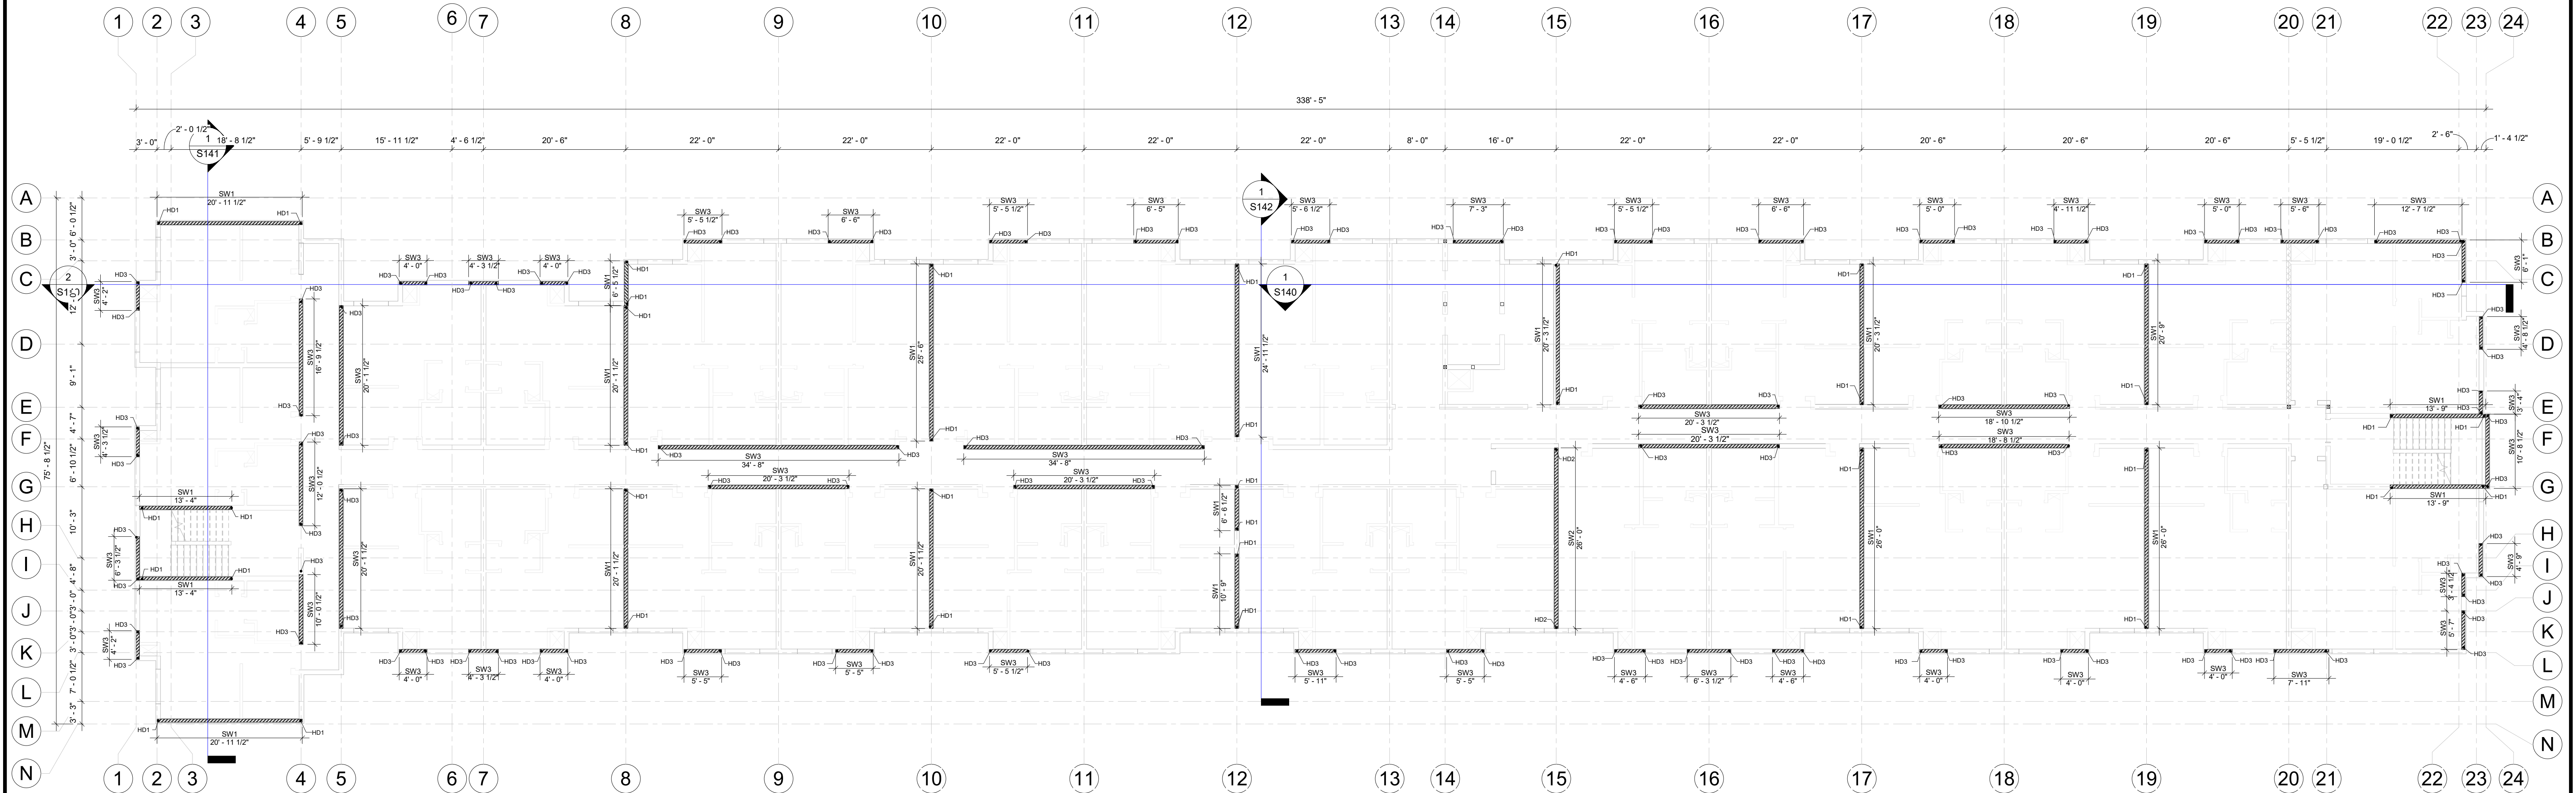

1 THIRD FLOOR SHEAR WALL LAYOUT PLAN
3/32" = 1'-0"

SHEARWALL SHEATHING SCHEDULE (THIRD FLOOR)

MARK	TYPE	THICKNESS	SIDES	NAILING			NOTES
				SIZE	EDGE	FIELD	
SW1	OSB	1/2"	ONE	0.131" X 2 1/2"	4"	12"	-
SW2	OSB	1/2"	ONE	0.131" X 2 1/2"	6"	12"	-
SW3	OSB	1/2"	ONE	0.131" X 2 1/2"	6"	12"	-

NOTES FOR SHEAR WALLS

1. NAILS FOR SW WALLS MAY BE BOX NAILS. NAILS FOR FLOOR AND ROOF TO BE COMMON TYPE.
2. WHERE SHEATHING IS APPLIED TO EACH FACE OF WALL AND NAIL SPACING IS LESS THAN 6" O.C., PANEL JOINTS SHALL BE OFFSET TO FALL ON DIFFERENT FRAMING MEMBERS.

HOLD DOWN SCHEDULE

MARK	REQUIRED HOLDOWN & ATTACHMENT	MIN. POST	POST GRADE	ANCHOR BOLT				REMARK
				NAILING	SIZE	EMBEDMENT INTO FOOTING	EDGE DISTANCE	
HD1	HDU8	(2) 2X6	DF NO.1/2	(20) 1/4 X 2 1/2 SDS	7/8"	-	-	-
HD2	HTT4	(2) 2X6	DF NO.1/2	(18) # 10 X 1 1/2 SD	5/8"	-	-	-
HD3			DF NO.1/2	(20) 1/4 X 2 1/2 SDS	7/8"	-	-	-

NOTE:

1. UNLESS NOTED OTHERWISE, FASTEN SHEATHING AS SW-2.
2. SHEAR WALL ENDS TO HAVE A HOLD-DOWN OR A UPLIFT CONNECTOR HTT4 U.N.O.
3. FLOOR-TO-FLOOR STRAPS AND FDTN HOLDOWNS SHOWN ON THIS SHEET ARE TO ATTACH TO THE BOTTOM OF THE SHEARWALLS ON THIS SHEET AND EXTEND DOWN TO THE FRAMING OR FOUNDATION BELOW.
4. REFER PRECEEDING WALL LAYOUT SHEET FOR WALL TYPE SPECIFICATION.
5. SEE THE GENERAL NOTES ON SHEETS S101, S102, S103, S104 AND S105 FOR ADDITIONAL INFORMATION
6. REFER TO ARCHITECTURAL PLANS FOR ALL DIMENSIONS. CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE STARTING CONSTRUCTION.

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6860 - hmanford@aia.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY
Residence Inn
BY HARRIOTT

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE & MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECTS AND ENGINEERS SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION


TULSA AIRPORT RIBM
61208
Project Number

6-08-2026

NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

No.	Description	Date

SHEET
S114
THIRD FLOOR SHEAR WALL LAYOUT PLAN

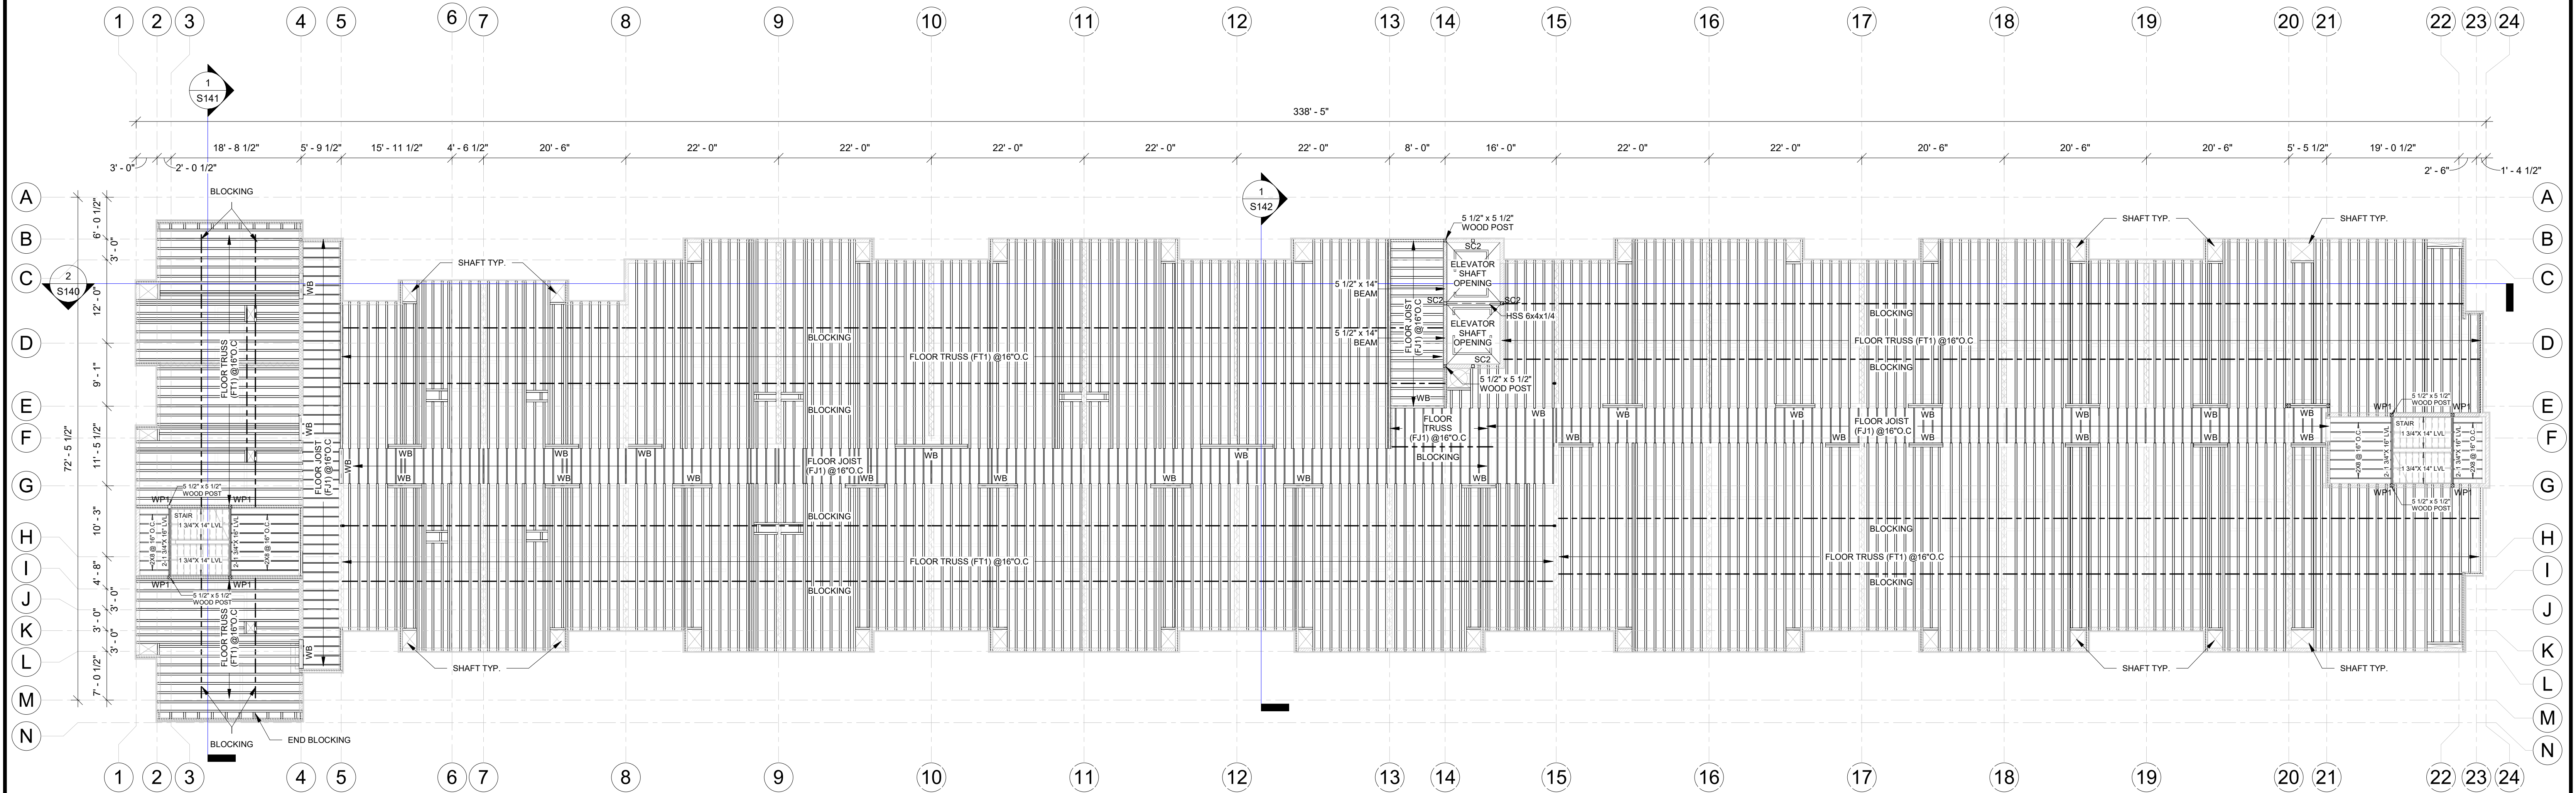

1 FOURTH FLOOR FRAMING LAYOUT PLAN
3/32" = 1'-0"

FLOOR FRAMING NOTES

- REFER TO ARCH & MEP DRAWINGS FOR OPENING DIMENSIONS ON THIS FLOOR.
- JOIST OR RAFTER FRAMER TO ADJUST THE TRUSS & JOIST LOCATIONS AS NEEDED TO AVOID PLUMBING CONFLICTS BUT IN NO WAY TRUSS OR JOIST TO BE PLACED WITH A SPACING LARGER THAN SPECIFIED.
- GC TO PROVIDE PRE-FABRICATED RAFTER UNDER NON-BEARING WALLS ALONG GRID LINES WHERE STEEL SUPPORTS OR BEARING WALLS DO NOT OCCUR.
- ALL RAFTERS/JOIST ARE TWO POINT BEARING U.N.O
- FLOOR SHEATHING AS PER ARCHITECTURAL.
- ALL EXTERIOR WALL HEADERS SHALL BE SUPPORTED BY (1) 2X BEARING STUDS U.N.O.
- SEE THE GENERAL NOTES ON SHEETS S-101, S-102, S-103, S-104 & S-105 FOR ADDITIONAL INFORMATION.
- ALL POST SUPPORTING HEADER, BEAM FRAMINGS NEEDS TO EXTENDED ALL THE WAY DOWN TO FDTN OR SUPPORTING MEMBER.
- PROVIDE FLOOR TRUSS OPENING FOR MEP DUCT PASSING.
- REFER TO ARCHITECTURAL PLANS FOR ALL DIMENSIONS. CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE STARTING CONSTRUCTION.
- ALL POST COMING FROM ABOVE FLOOR TO HAVE A DBL OR BEAM SUPPORTING.
- DO NOT SCALE DRAWINGS. RESOLVE ANY DISCREPANCY WITH THE ARCHITECT.
- NOTIFY STRUCTURAL ENGINEER THROUGH THE ARCHITECT OF ANY VARIATIONS FROM DIMENSIONS AND CONDITIONS SHOWN BY THIS DRAWING.
- IF STRONGER MATERIAL IS DESIGNATED HERE OR ON THE PLANS, THE STRONGER MATERIAL GOVERNS.

STEEL COLUMN AND BEAM SCHEDULE

MARK	SIZE	COLUMN/ BEAM	GRADE
SC1	HSS 10x5x3/8	COLUMN	Fy = 36 Ksi
SC2	HSS 5-1/2X5-1/2X3/8	COLUMN	Fy = 36 Ksi
SC3	HSS8X8X5/8	COLUMN	Fy = 36 Ksi
SC4	HSS6X3X1/2	COLUMN	Fy = 36 Ksi
SB1	HSS20X8X5/8"	BEAM	Fy = 50 Ksi
SB2	W18X71	BEAM	Fy = 50 Ksi
SB3	W6X15	BEAM	Fy = 50 Ksi
SB4	W10X19	BEAM	Fy = 50 Ksi

FOURTH FLOOR WOOD BEAM SCHEDULE

MARK	TYPE	SPECIFICATION		END STUD POST
		TOP & BOTTOM	WEB	
WB	TRUSS	2X6 DF NO. 1/NO.2	2X6 DF NO. 1/NO.2	(3) 2X6 DF NO.1/NO.2 OR BETTER

WOOD JOIST SCHEDULE

MARK	TYPE	SIZE	O.C.S
FJ1	JOIST	2X6 DF NO. 1/NO.2	16"
RJ2	JOIST	2X10 DF NO.1/NO.2	16"

WOOD POST SCHEDULE

MARK	SIZE	GRADE
WP1	5 1/2" x 5 1/2'	DF NO. 1/NO.2

FLOOR TRUSS SCHEDULE

MARK	SPECIFICATION	TOP & BOTTOM	WEB	REMARK	DETAIL REF.
FT1	21 1/2" DEEP WARREN TYPE WEBBED FLOOR TRUSS @16" O.C	2X6 DF NO.1/NO.2	2X6 DF NO.1/NO.2	ALL SUPPORT BEARING VERTICLE MEMBER TO BE OF SIZE MATCHING THE WALL WIDTH	

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jhmarford@aai.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY
Residence Inn
BY MARRIOTT

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE & MEMORIAL, TULSA, OK


THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECTS AND ENGINEERS SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION

No.	Description	Date

TULSA AIRPORT RBM
61208
Project Number

SHEET
S115
FOURTH FLOOR FRAMING LAYOUT PLAN

6-08-2026
NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

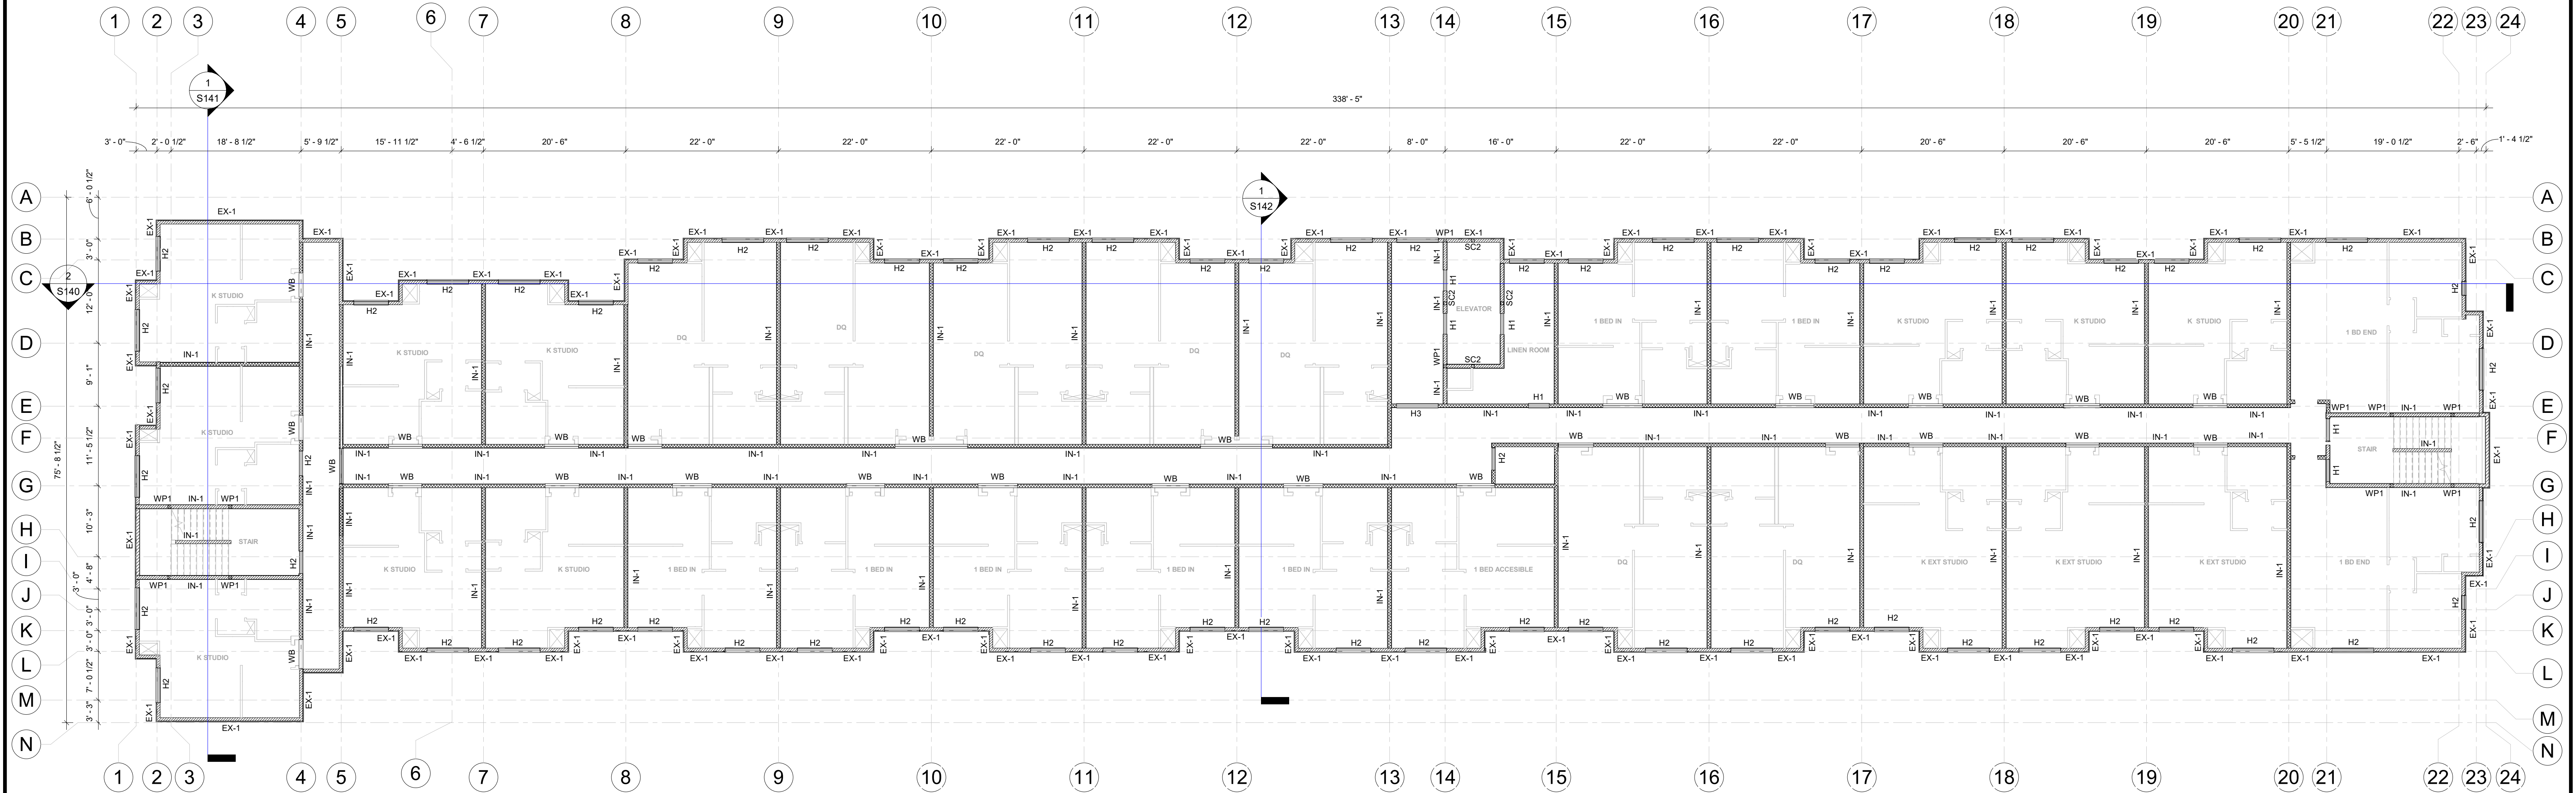

WALL AND COLUMN NOTES

- REFER TO ARCH & MEP DRAWINGS FOR OPENING DIMENSIONS ON THIS FLOOR.
- SEE SHEAR WALL CALLOUT ON SHEET S-117 FOR SHEAR WALL INFORMATION.
- ALL POST SUPPORTING HEADER ,BEAM FRAMING NEEDS TO EXTENDED ALL THE WAY DOWN TO FDTN OR SUPPORTING MEMBER.
- SEE THE GENERAL NOTES ON SHEETS S-101,S-102, S-103, S-104 & S-105 FOR ADDITIONAL INFORMATION.
- ALL POSTS ARE TO MATCH WIDTH AND MATERIAL OF WALL IN WHICH POST OCCURS U.N.O.
- IF STRONGER MATERIAL IS DESIGNATED HERE OR ON THE PLANS,THE STRONGER MATERIAL GOVERNS.
- NON-LOAD BEARING TO BE 2X4 @24" O.C U.N.O. & 2X6@ 24"O.C. U.N.O.

HEADER SCHEDULE

LEVEL	MARK	SIZE	JAMB POST
FIRST FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	3 JACK & 2 KING
	H2	(3) 2 X 6 1 3/4"2.0E MICROLLAM LVL	2 JACK & 2 KING
	H3	(3) 2 X 12 SPF NO. 1/ NO. 2	5 X 7 1.8 PARALLAM PSL
	H4	(3) 2 X 8 1 3/4"2.0E MICROLLAM LVL	2 JACK & 2 KING
	H5	(3) 2 X 10 1 3/4"2.0E MICROLLAM LVL	2 JACK & 2 KING
	H6	(3) 2 X 10 SPF NO. 1/ NO. 2	2 JACK & 2 KING
SECOND FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	3 JACK & 2 KING
	H2	(3) 2 X 10 SPF NO. 1/ NO. 2	2 JACK & 2 KING
	H3	(3) 2 X 12 SPF NO. 1/ NO. 2	5 X 6 1/4" 1.8 PARALLAM PSL
THIRD FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	2 JACK & 1 KING
	H2	(3) 2 X 10 SPF NO. 1/ NO. 2	2 JACK & 1 KING
	H3	(3) 2 X 12 SPF NO. 1/ NO. 2	4 JACK & 3 KING
FOURTH FLOOR	H1	(3) 2 X 6 SPF NO. 1/ NO. 2	2 JACK & 1 KING
	H2	(3) 2 X 10 SPF NO. 1/ NO. 2	1 JACK & 1 KING
	H3	(3) 2 X 10 SPF NO. 1/ NO. 2	3 JACK & 2 KING

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING

STEEL COLUMN AND BEAM SCHEDULE

MARK	SIZE	COLUMN/ BEAM	GRADE
SC1	HSS 10x5x3/8	COLUMN	Fy = 36 Ksi
SC2	HSS 5-1/2X5-1/2X3/8	COLUMN	Fy = 36 Ksi
SC3	HSS8X8X5/8	COLUMN	Fy = 36 Ksi
SC4	HSS6X3X1/2	COLUMN	Fy = 36 Ksi
SB1	HSS20X8X5/8"	BEAM	Fy = 50 Ksi
SB2	W18X71	BEAM	Fy = 50 Ksi
SB3	W6X15	BEAM	Fy = 50 Ksi
SB4	W10X19	BEAM	Fy = 50 Ksi

FOURTH FLOOR WOOD WALL SCHEDULE

MARK	SIZE	GRADE	SPACING	QUANTITY	COMMENTS	BLOCKING
EXW1	2X6	DF NO.2	16" O.C.	1	-	MID POINT BLOCKING
INW1	2X6	DF NO.2	16" O.C.	1	-	MID POINT BLOCKING

1 FOURTH FLOOR WALL LAYOUT PLAN
3/32" = 1'-0"

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jhmanford@aai.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY
Residence INN
BY HARRIOTT

**RESIDENCE INN BY
MARRIOTT**

NW CORNER OF PINE &
MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR
REVIEW AND PERMITTING. DRAWINGS
ARE NOT TO BE USED FOR
CONSTRUCTION WITHOUT ARCHITECTS
AND ENGINEERS SIGNATURE AND THEIR
DATE OF ISSUE FOR CONSTRUCTION

No.	Description	Date

TULSA AIRPORT RIBM
61208
Project Number

SHEET
S116
FOURTH FLOOR
WALL LAYOUT PLAN

6-08-2026

NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK



<u>NOTES FOR SHEAR WALLS</u>								
1. NAILS FOR SW WALLS MAY BE BOX NAILS. NAILS FOR FLOOR AND ROOF TO BE COMMON TYPE. 2. WHERE SHEATHING IS APPLIED TO EACH FACE OF WALL AND NAIL SPACING IS LESS THAN 6" O.C., PANEL JOINTS SHALL BE OFFSET TO FALL ON DIFFERENT FRAMING MEMBERS.								
<u>HOLD DOWN SCHEDULE</u>								
MARK	REQUIRED HOLDOWN & ATTACHMENT	MIN. POST	POST GRADE	ANCHOR BOLT				REMARK
				NAILING	SIZE	EMBEDMENT INTO FOOTING	EDGE DISTANCE	
HD1	HTT4	(2) 2X6	DF NO.1/2	(18) # 10 X 1 1/2" SD	5/8"	-	-	-
HD1	HTT4	(2) 2X6	DF NO.1/2	(18) # 10 X 1 1/2" SD	5/8"	-	-	-

 ARCHITECTS 9726 E. 42nd St., Suite 153, Tulsa, TX 74146 918 (442) 6860 - jinsanford@aol.com COPYRIGHT 2008 John Sanford	DEVELOPED BY HI-TECH HOSPITALITY  <u>RESIDENCE INN BY</u> <u>MARRIOTT</u> NW CORNER OF PINE & MEMORIAL, TULSA, OK
--	---

THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECT'S AND ENGINEER'S SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION.	TULSA AIRPORT RIBM 61208 Project Number
---	---

No.	Description	Date


6-08-2026

NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

SHEET

S117

FOURTH FLOOR
SHEAR WALL YOUT LAYOUT PLANT

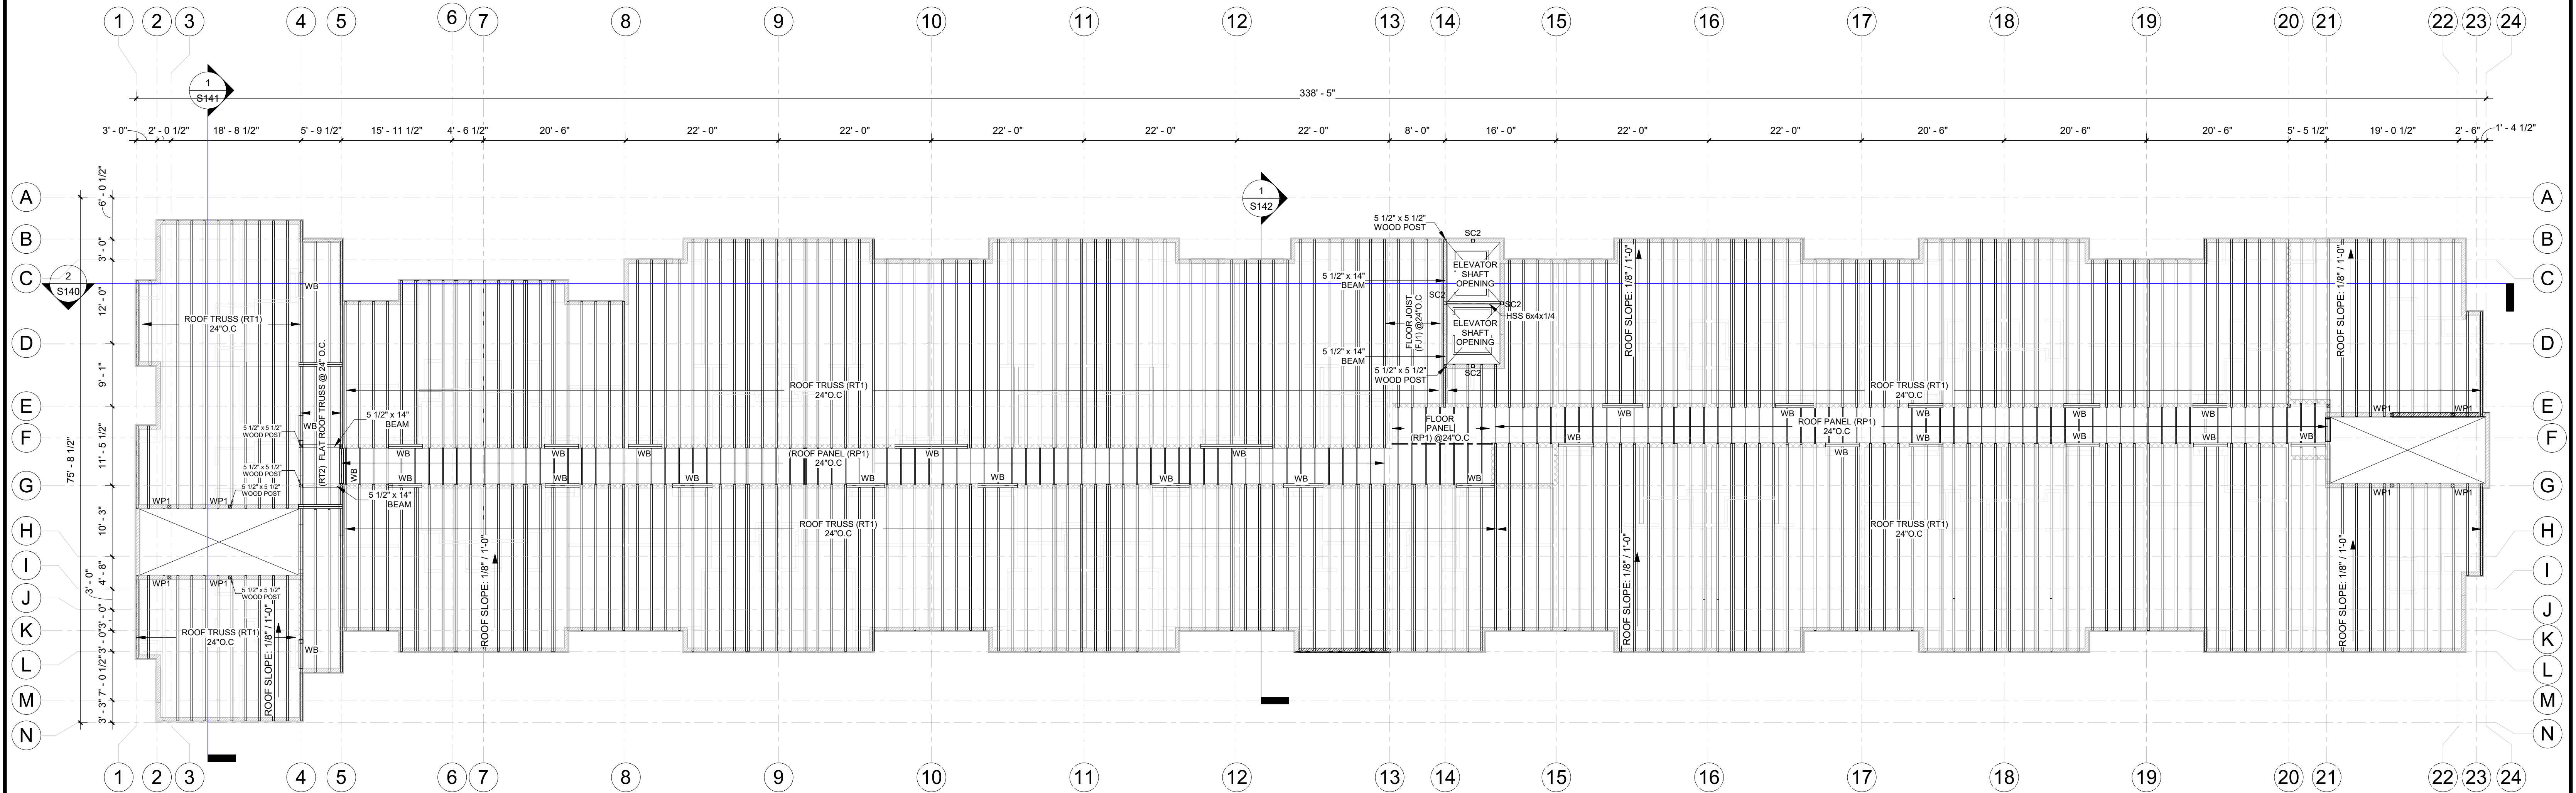

1 ROOF FRAMING PLAN
3/32" = 1'-0"

ROOF FRAMING NOTES

1. REFER TO ARCH & MEP DRAWINGS FOR OPENING DIMENSIONS ON THIS FLOOR.
2. JOIST OR TRUSS, FRAMER TO ADJUST THE TRUSS & JOIST LOCATIONS AS NEEDED TO AVOID PLUMBING CONFLICTS BUT IN NO WAY TRUSS OR JOIST TO BE PLACED WITH A SPACING LARGER THAN SPECIFIED.
3. GC TO PROVIDE PRE-FABRICATED TRUSS UNDER NON-BEARING WALLS ALONG GRID LINES WHERE STEEL SUPPORTS OR BEARING WALLS DO NOT OCCUR.
4. ALL TRUSSES/JOIST ARE TWO POINT BEARING U.N.O
5. ROOF SHEATHING AS PER ARCHITECTURAL.
6. ALL EXTERIOR WALL HEADERS SHALL BE SUPPORTED BY (1) 2X BEARING STUDS U.N.O.
7. SEE THE GENERAL NOTES ON SHEETS S101, S102, S103S, S104 AND S105 FOR ADDITIONAL INFORMATION.
8. ALL POST SUPPORTING HEADER, BEAM FRAMINGS NEEDS TO EXTENDED ALL THE WAY DOWN TO FDTN OR SUPPORTING MEMBER.
9. REFER TO ARCH PLANS FOR ROOF SLOPES
- 11.REFER TO ARCHITECTURAL PLANS FOR ALL DIMENSIONS. CONTRACTOR TO VERIFY ALL DIMENSIONS BEFORE STARTING CONSTRUCTION.
- 12.DO NOT SCALE DRAWINGS. RESOLVE ANY DISCREPANCY WITH THE ARCHITECT. NOTIFY STRUCTURAL ENGINEER THROUGH THE ARCHITECT OF ANY VARIATIONS FROM DIMENSIONS AND CONDITIONS SHOWN BY THIS DRAWING

STEEL COLUMN AND BEAM SCHEDULE

MARK	SIZE	COLUMN/ BEAM	GRADE
SC1	HSS 10x5x3/8	COLUMN	Fy = 36 Ksi
SC2	HSS 5-1/2X5-1/2X3/8	COLUMN	Fy = 36 Ksi
SC3	HSS8X8X5/8	COLUMN	Fy = 36 Ksi
SC4	HSS6X3X1/2	COLUMN	Fy = 36 Ksi
SB1	HSS20X8X5/8"	BEAM	Fy = 50 Ksi
SB2	W18X71	BEAM	Fy = 50 Ksi
SB3	W6X15	BEAM	Fy = 50 Ksi
SB4	W10X19	BEAM	Fy = 50 Ksi

WOOD BEAM SCHEDULE

MARK	TYPE	SPECIFICATION		END STUD POST
		TOP & BOTTOM	WEB	
WB	WEBBED	2X6 DF NO.1/NO.2	2X6 DF NO.1/NO.2	(3) 2X6 SPF NO.1/NO.2 OR BETTER

ROOF TRUSS SCHEDULE

MARK	TYPE	SPACING	SPECIFICATION		
			TOP & BOTTOM	WEB	REMARK
RT1	MONO SLOPE TRUSSES	16" O.C	2X6 DF NO.1/NO.2	2X6 DF NO.1/NO.2	ALL SUPPORT BEARING VERTICLE MEMBER TO BE OF SIZE MATCHING THE WALL WIDTH
RT2	MONO SLOPE TRUSSES	16" O.C	2X6 DF NO.1/NO.2	2X6 DF NO.1/NO.2	ALL SUPPORT BEARING VERTICLE MEMBER TO BE OF SIZE MATCHING THE WALL WIDTH

WOOD POST SCHEDULE

MARK	SIZE	GRADE
WP1	5 1/2" x 5 1/2'	DF NO. 1/NO.2

WOOD JOIST SCHEDULE

MARK	TYPE	SIZE	O.C.S
FJ1	JOIST	2X6 DF NO.1/NO.2	16"
RJ2	JOIST	2X10 DF NO.1/NO.2	16"

WOOD PANEL SCHEDULE

MARK	TYPE	SIZE	O.C.S
RP1	JOIST	DF NO.1/NO.2	16"

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING



DEVELOPED BY
HI-TECH
HOSPITALITY

Residence INN
BY HARRIOTT

**RESIDENCE INN BY
MARRIOTT**

NW CORNER OF PINE &
MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR
REVIEW AND PERMITTING. DRAWINGS
ARE NOT TO BE USED FOR
CONSTRUCTION WITHOUT ARCHITECTS
AND ENGINEERS SIGNATURE AND THEIR
DATE OF ISSUE FOR CONSTRUCTION

TULSA AIRPORT RIBM
61208
Project Number

6-08-2026

NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK


SHEET

S118
ROOF FRAMING
LAYOUT PLAN



WOOD PANEL SCHEDULE			
MARK	TYPE	SIZE	O.C.S
RP1	JOIST	2X6 SPF NO.1/NO.2	16"

JS ARCHITECTS 9126 E. 42nd St. Suite 153, Tulsa, 74146 918-645-6805 - jmarriano@aol.com COPYRIGHT 2026 John Sanford	DEVELOPED BY HI-TECH HOSPITALITY	Residence INN BY MARRIOTT																							
	RESIDENCE INN BY MARRIOTT NW CORNER OF PINE & MEMORIAL, TULSA, OK																								
	THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECT'S AND ENGINEER'S SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION.	TULSA AIRPORT RIBM 61208 Project Number																							
	<table border="1"><thead><tr><th>No.</th><th>Description</th><th>Date</th></tr></thead><tbody><tr><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td></tr><tr><td> </td><td> </td><td> </td></tr></tbody></table>	No.	Description	Date																					
No.	Description	Date																							
6-08-2026 NOT VALID FOR CONSTRUCTION UNLESS SIGNED IN THIS BLOCK																									

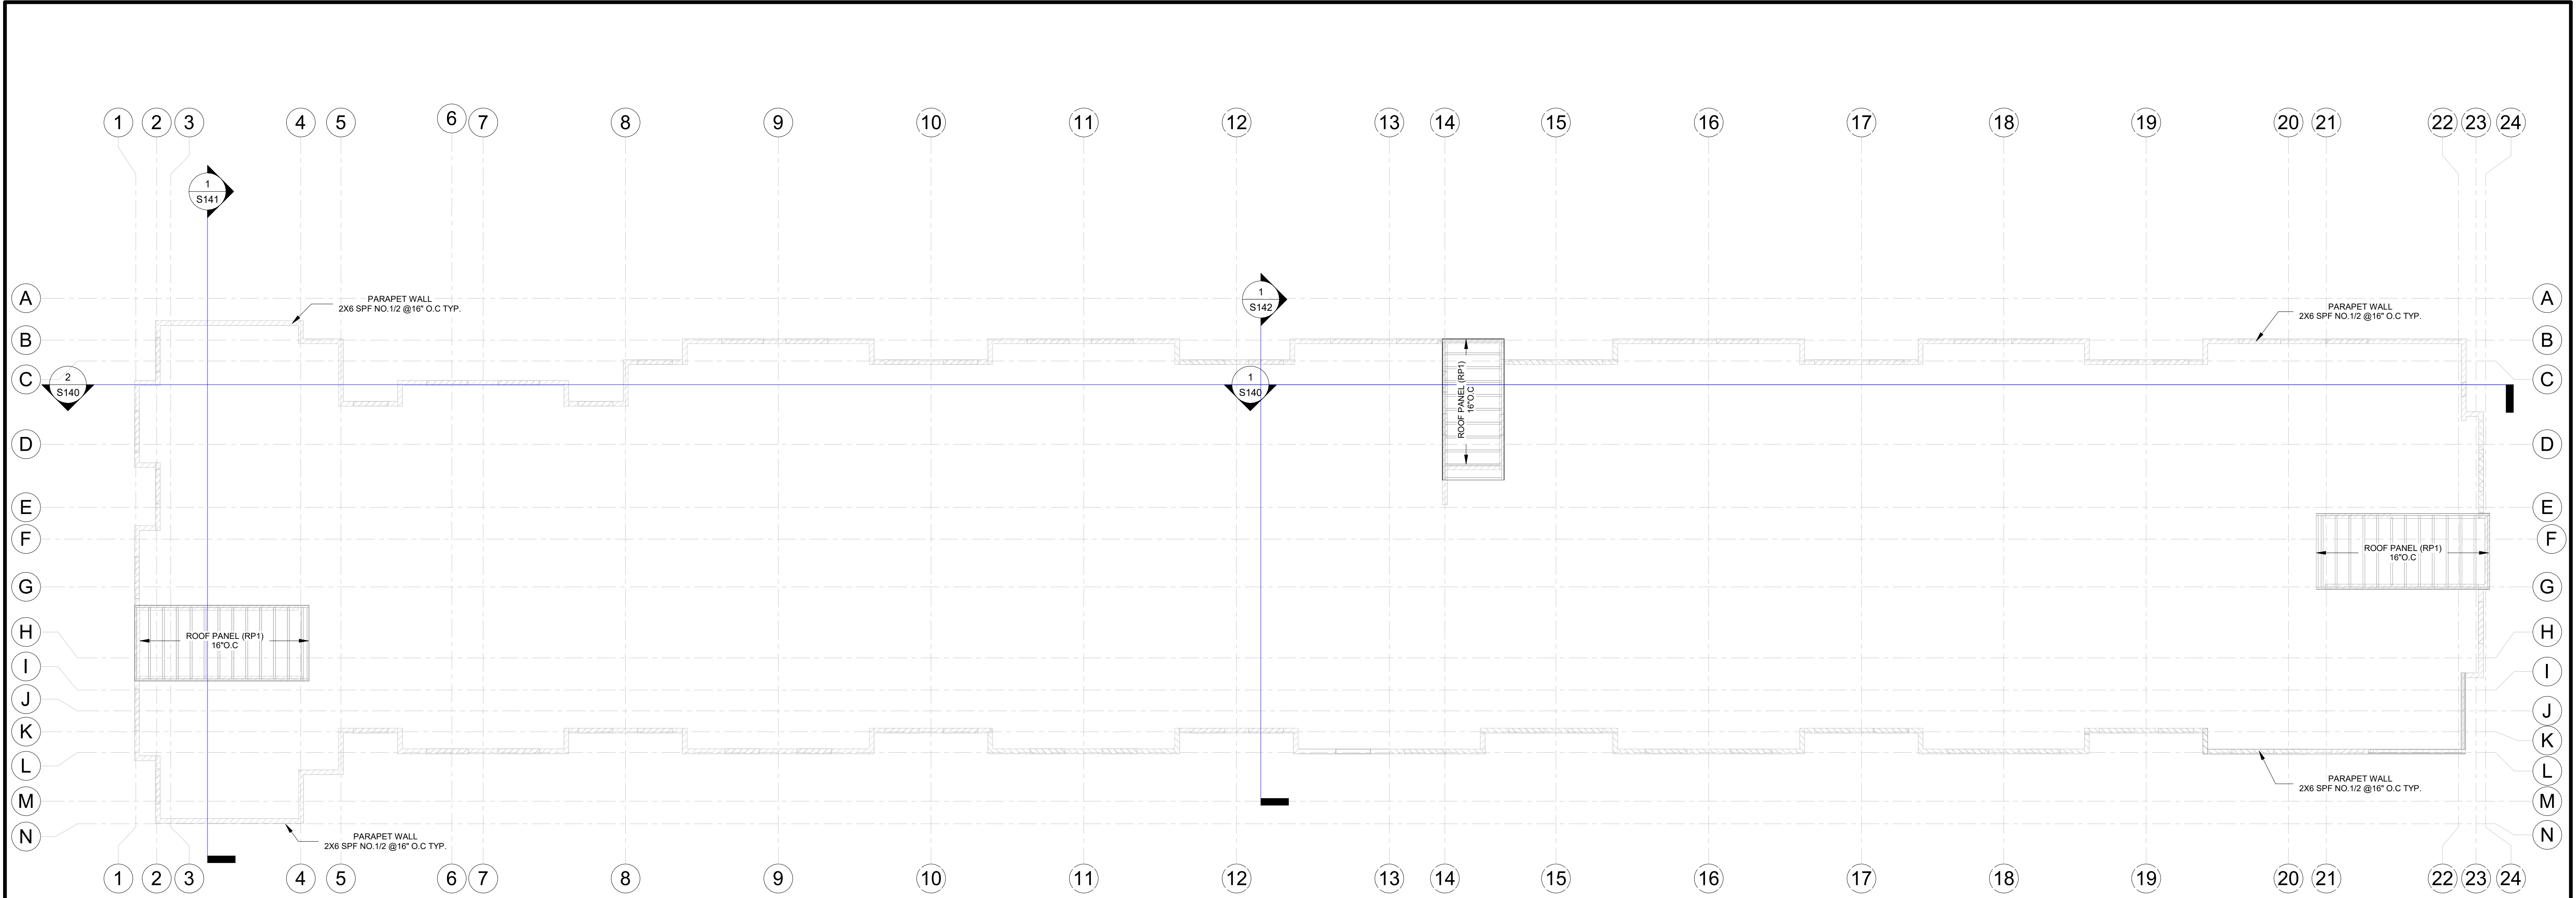

1 TOP ROOF FRAMING PLAN HEAD ROOM
3/32" = 1'-0"

SYMBOL	LEGEND
HD(X)	HOLD DOWN
	SHEAR WALL
	EXTERNAL LOAD BEARING WALL
	INTERNAL LOAD BEARING WALL
	INFILL / NLP WALL
	LGS POST
	STEEL BEAM
	STEEL COLUMN
	HEADER
	WEBBED BEAM
	SHAFT OPENING

WOOD PANEL SCHEDULE			
MARK	TYPE	SIZE	O.C.S
RP1	JOIST	2X6 SPF NO.1/NO.2	16"

9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jhsaiaford@aia.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE & MEMORIAL, TULSA, OK

TULSA AIRPORT RIBM 61208
Project Number

THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECTS AND ENGINEERS SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION


No.	Description	Date

6-08-2026
NOT VALID FOR CONSTRUCTION UNLESS SIGNED IN THIS BLOCK

SHEET

S120

HEAD ROOM TOP ROOF FRAMING LAYOUT PLAN

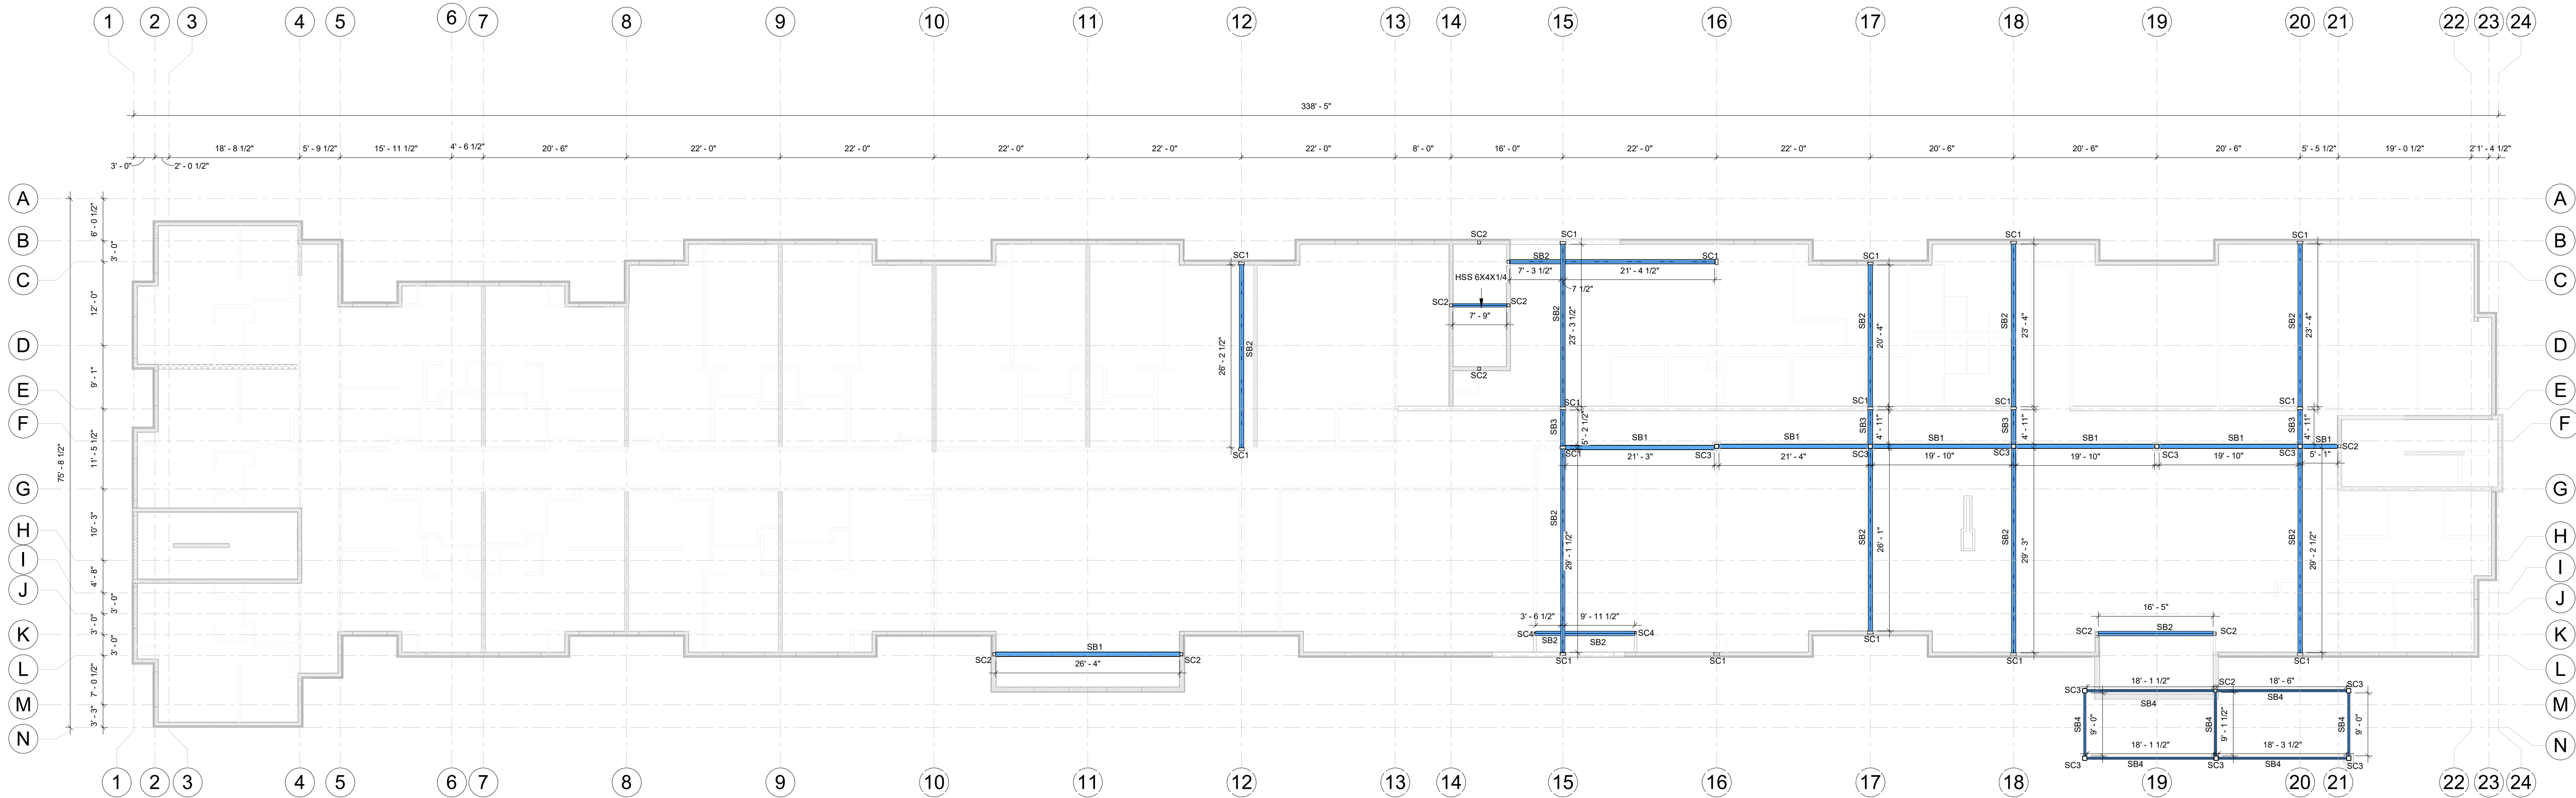

SB		
Structural Material	System Length	Count
Steel ASTM A500, Grade B, Rectangular and Square	10' - 1 13/16"	20
Steel ASTM A992	11' - 0"	15
Steel ASTM A992	11' - 4"	1
Steel ASTM A500, Grade B, Rectangular and Square	12' - 6"	1
Steel ASTM A992	12' - 6"	21
Steel ASTM A500, Grade B, Rectangular and Square	13' - 0"	5
Softwood, Lumber	40' - 3"	2
Steel ASTM A992	50' - 0"	4
Softwood, Lumber	50' - 3"	1
Softwood, Lumber	50' - 11"	1
Softwood, Lumber	52' - 9"	8
Grand total: 79		

JS

ARCHITECTS

9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jharrimanford@aia.com
COPYRIGHT 2020 John Sanford

6-08-2026
NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

DEVELOPED BY

HI-TECH HOSPITALITY


Residence INN
BY MARRIOTT

THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECTS AND ENGINEERS SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION

No.	Description	Date

TULSA AIRPORT RIBM
61208
Project Number

SHEET
S121
FIRST FLOOR HRS
PLAN

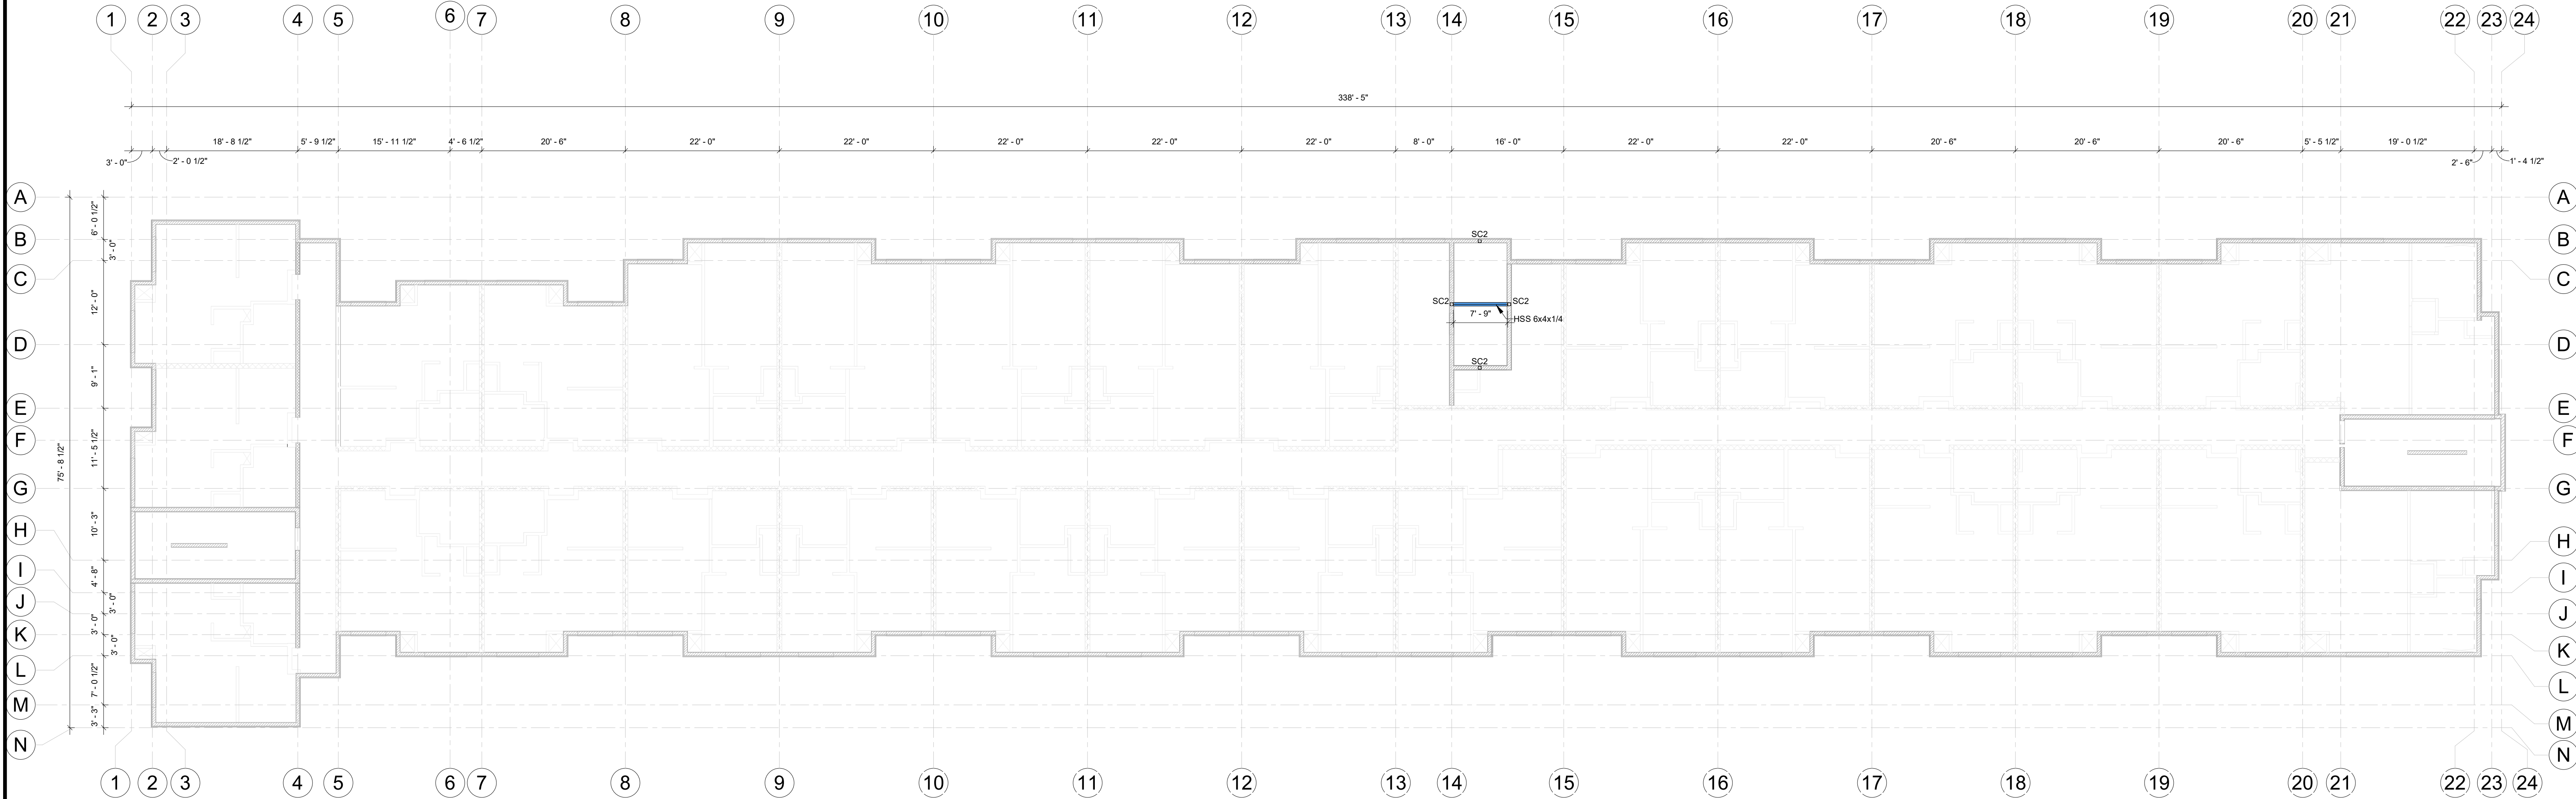

1 TYPICAL FLOOR FRAMING HRS LAYOUT PLAN
3/32" = 1'-0"

SB		
Structural Material	System Length	Count
Steel ASTM A500, Grade B, Rectangular and Square	10' - 1 13/16"	20
Steel ASTM A992	11' - 0"	15
Steel ASTM A992	11' - 4"	1
Steel ASTM A500, Grade B, Rectangular and Square	12' - 6"	1
Steel ASTM A992	12' - 6"	21
Steel ASTM A500, Grade B, Rectangular and Square	13' - 0"	5
Softwood, Lumber	40' - 3"	2
Steel ASTM A992	50' - 0"	4
Softwood, Lumber	50' - 3"	1
Softwood, Lumber	50' - 11"	1
Softwood, Lumber	52' - 9"	8
Grand total: 79		

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jhsanford@aia.com
COPYRIGHT 2020 John Sanford

6-08-2026
NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

DEVELOPED BY
HI-TECH HOSPITALITY

Residence INN
BY MARRIOTT

RESIDENCE INN BY MARRIOTT


NW CORNER OF PINE & MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECTS AND ENGINEERS SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION

No.	Description	Date

TULSA AIRPORT RIBM
61208
Project Number

SHEET
S122
TYPICAL FLOOR HRS PLAN

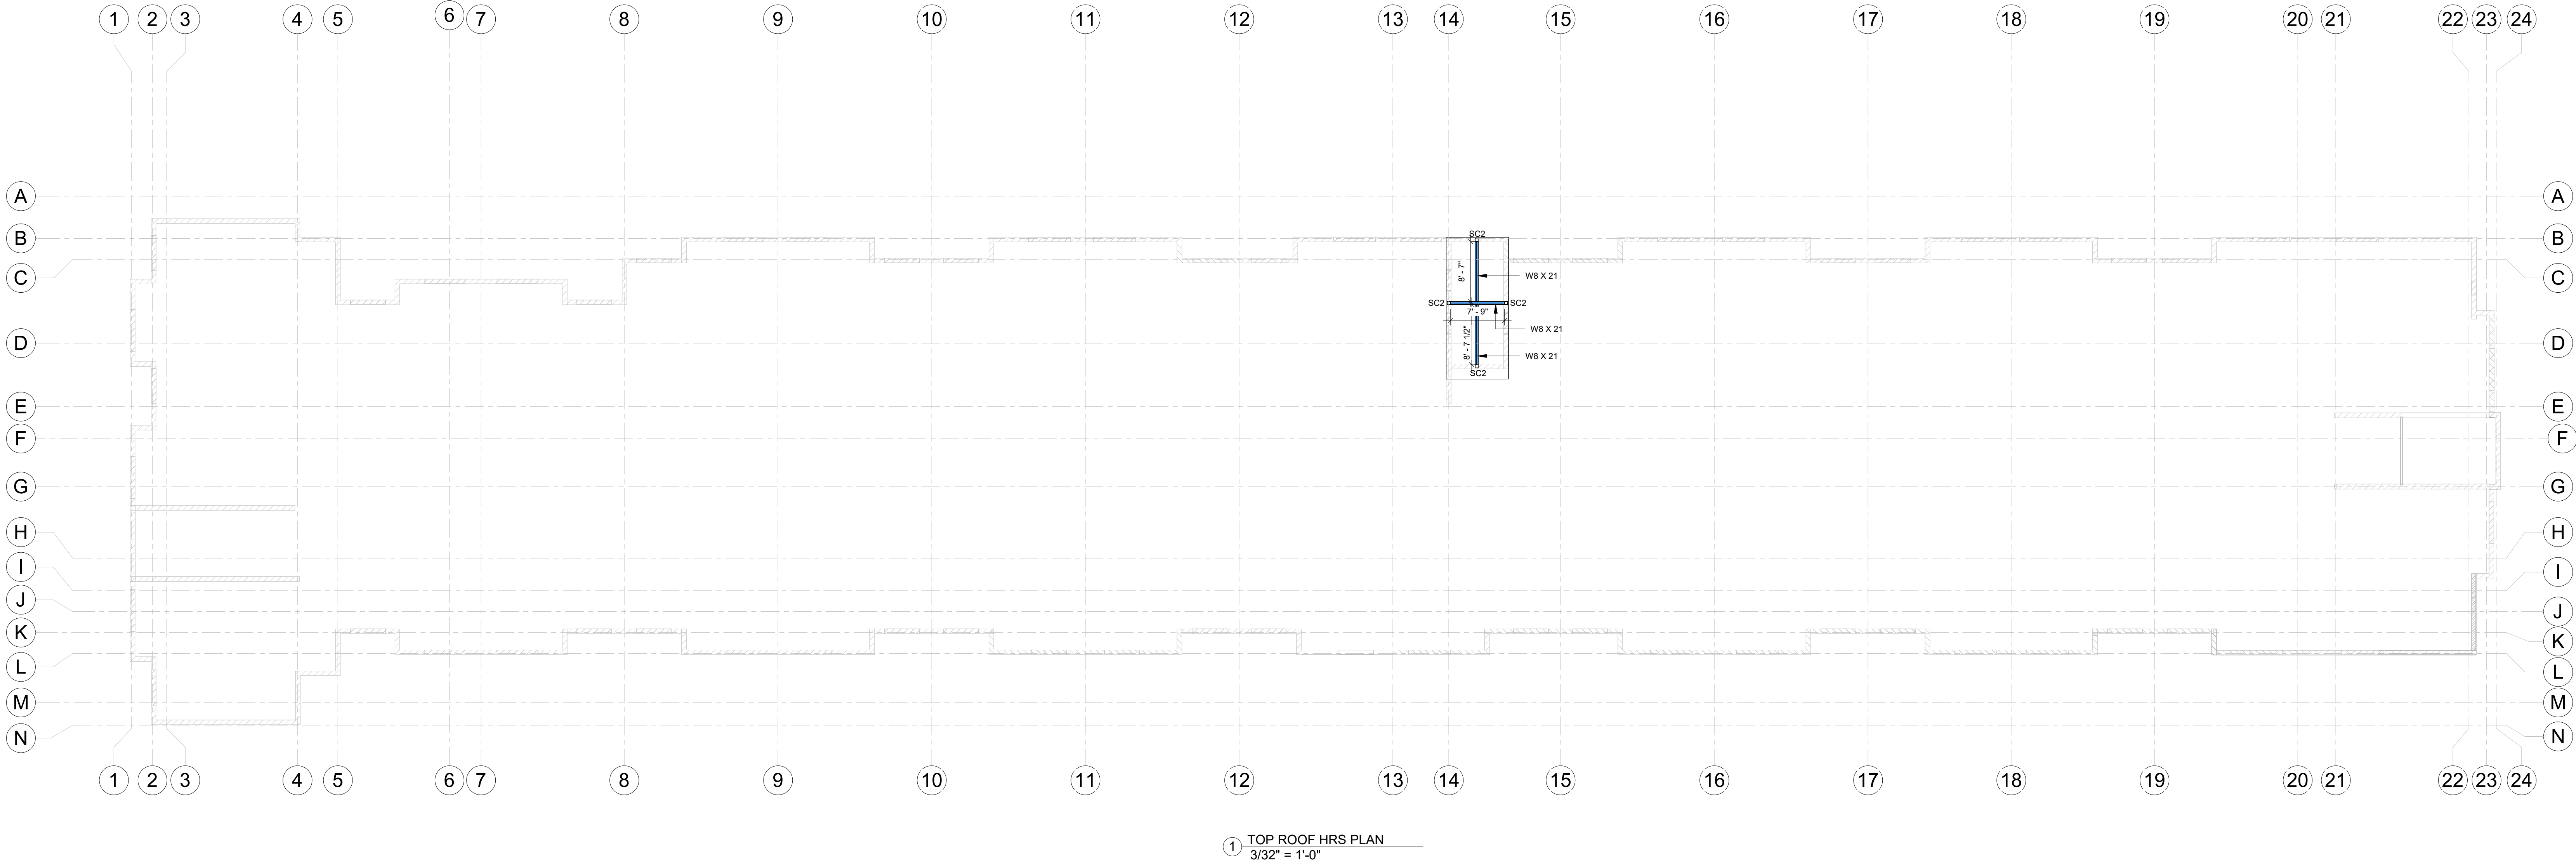

1 TOP ROOF HRS PLAN
3/32" = 1'-0"

SB		
Structural Material	System Length	Count
Steel ASTM A500, Grade B, Rectangular and Square	10' - 1 13/16"	20
Steel ASTM A992	11' - 0"	15
Steel ASTM A992	11' - 4"	1
Steel ASTM A500, Grade B, Rectangular and Square	12' - 6"	1
Steel ASTM A992	12' - 6"	21
Steel ASTM A500, Grade B, Rectangular and Square	13' - 0"	5
Softwood, Lumber	40' - 3"	2
Steel ASTM A992	50' - 0"	4
Softwood, Lumber	50' - 3"	1
Softwood, Lumber	50' - 11"	1
Softwood, Lumber	52' - 9"	8
Grand total: 79		

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jharrimanford@aia.com
COPYRIGHT 2026 John Sanford

6-08-2026
NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

DEVELOPED BY
HI-TECH HOSPITALITY

Residence INN
BY HARRIOTT

**RESIDENCE INN BY
MARRIOTT**

NW CORNER OF PINE &
MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR
REVIEW AND PERMITTING. DRAWINGS
ARE NOT TO BE USED FOR
CONSTRUCTION WITHOUT ARCHITECT'S
AND ENGINEER'S SIGNATURE AND THEIR
DATE OF ISSUE FOR CONSTRUCTION

No.	Description	Date

TULSA AIRPORT RIBM
61208
Project Number

SHEET
S123
HEADROOM/TOP
ROOF HRS PLAN



1 BUILDING SECTION
1/8" = 1'-0"



2 BUILDING SECTION
1/8" = 1'-0"

JS
ARCHITECTS

9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jhmarford@aia.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH
HOSPITALITY

Residence INN
BY MARRIOTT

**RESIDENCE INN BY
MARRIOTT**

NW CORNER OF PINE &
MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR
REVIEW AND PERMITTING. DRAWINGS
ARE NOT TO BE USED FOR
CONSTRUCTION WITHOUT ARCHITECT'S
AND ENGINEER'S SIGNATURE AND THEIR
DATE OF ISSUE FOR CONSTRUCTION

TULSA AIRPORT RBM
61208
Project Number

No.	Description	Date

SHEET
S140
BUILDING SECTION 1

6-08-2026
NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK



1 BUILDING SECTION 2
1/4" = 1'-0"

JS
ARCHITECTS

9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jharriford@jax.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY **Residence Inn**
BY MARRIOTT

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE &
MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR
REVIEW AND PERMITTING. DRAWINGS
ARE NOT TO BE USED FOR
CONSTRUCTION WITHOUT ARCHITECT'S
AND ENGINEER'S SIGNATURE AND THEIR
DATE OF ISSUE FOR CONSTRUCTION


TULSA AIRPORT RIBM
61208
Project Number

No.	Description	Date

6-08-2026

NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

SHEET
S141
BUILDING SECTION 2

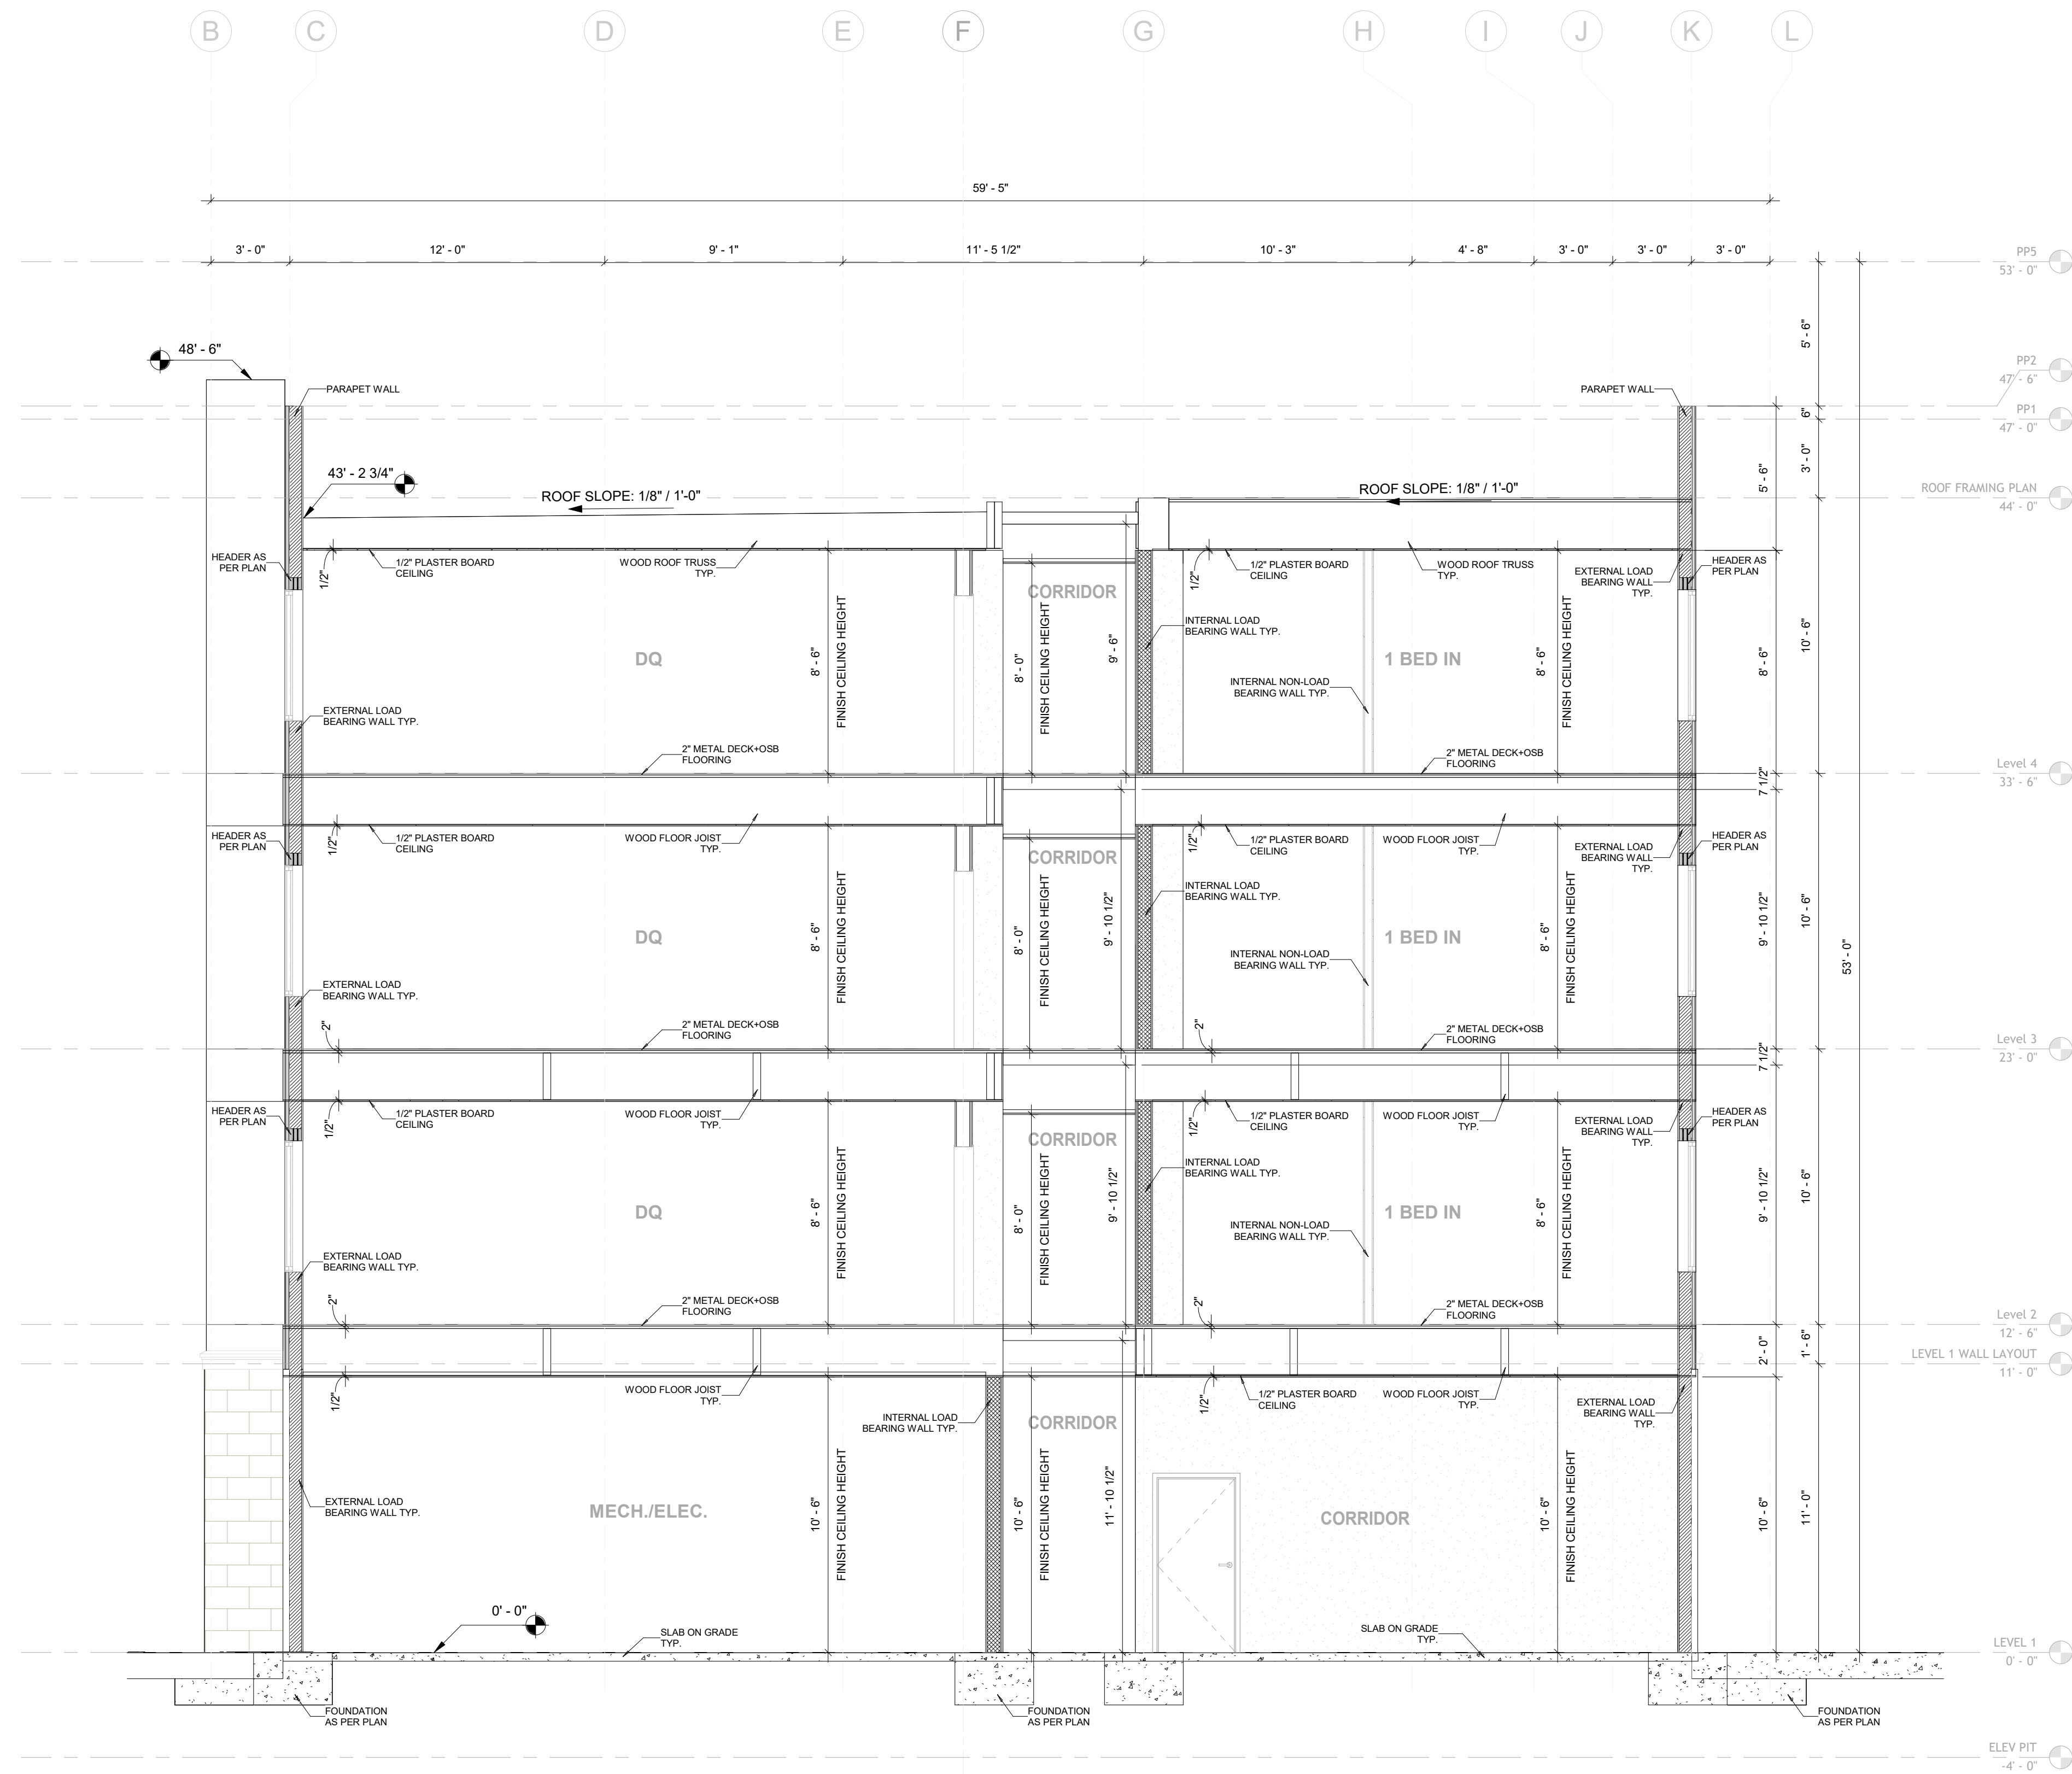

1 BUILDING SECTION - 3
1/4" = 1'-0"

JS
ARCHITECTS

9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jhmanford@jaxi.com
COPYRIGHT 2026 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY **Residence Inn**
BY MARRIOTT

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE &
MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR
REVIEW AND PERMITTING. DRAWINGS
ARE NOT TO BE USED FOR
CONSTRUCTION WITHOUT ARCHITECT'S
AND ENGINEER'S SIGNATURE AND THEIR
DATE OF ISSUE FOR CONSTRUCTION


TULSA AIRPORT RIBM
61208
Project Number

No.	Description	Date


SHEET
S142
BUILDING SECTION 3

6-08-2026

NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

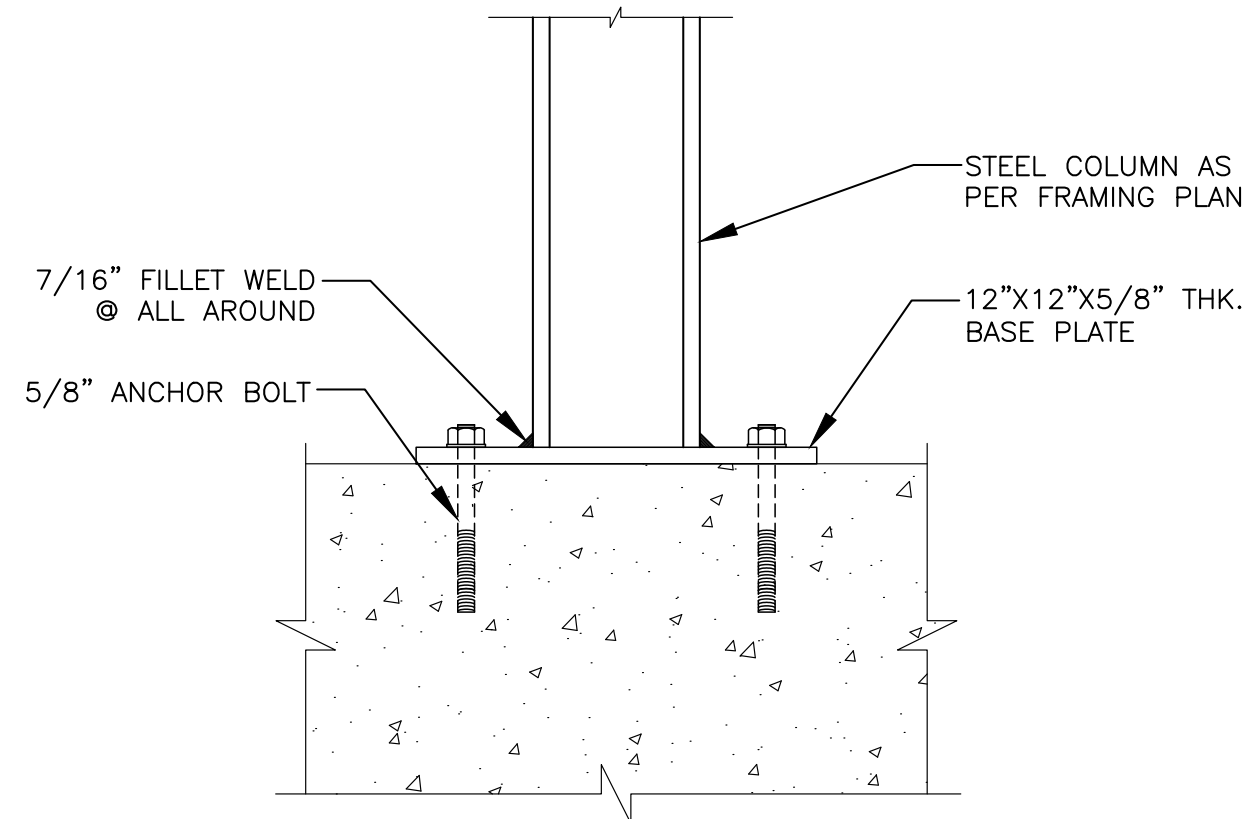


ELEVATION

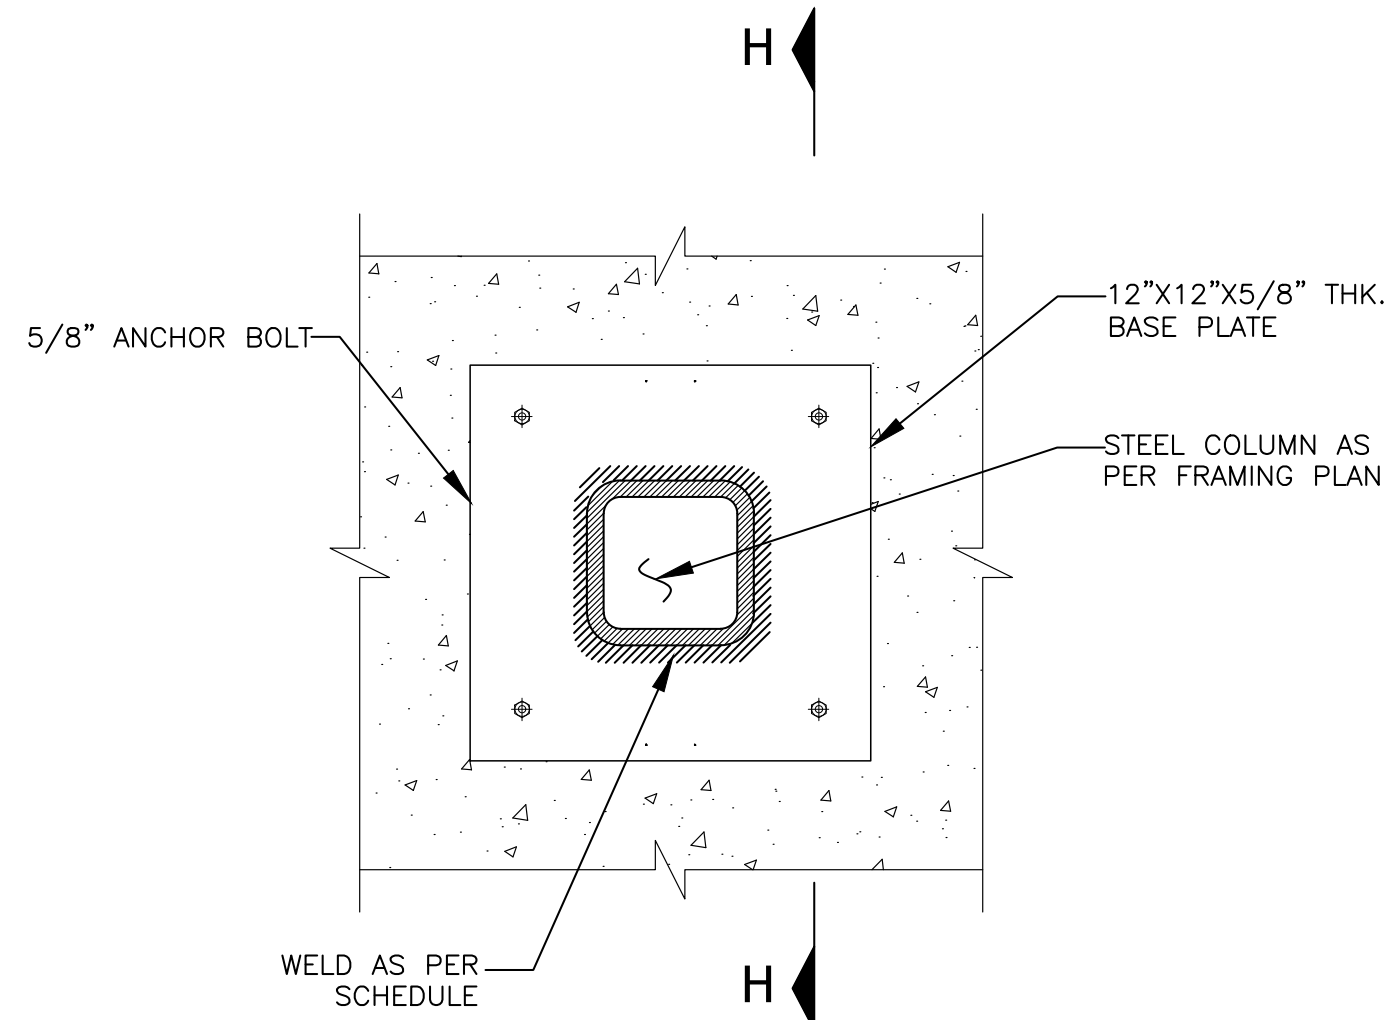


PLAN


1 BASE PLATE DETAIL OF STEEL COLUMN
SCALE: NTS

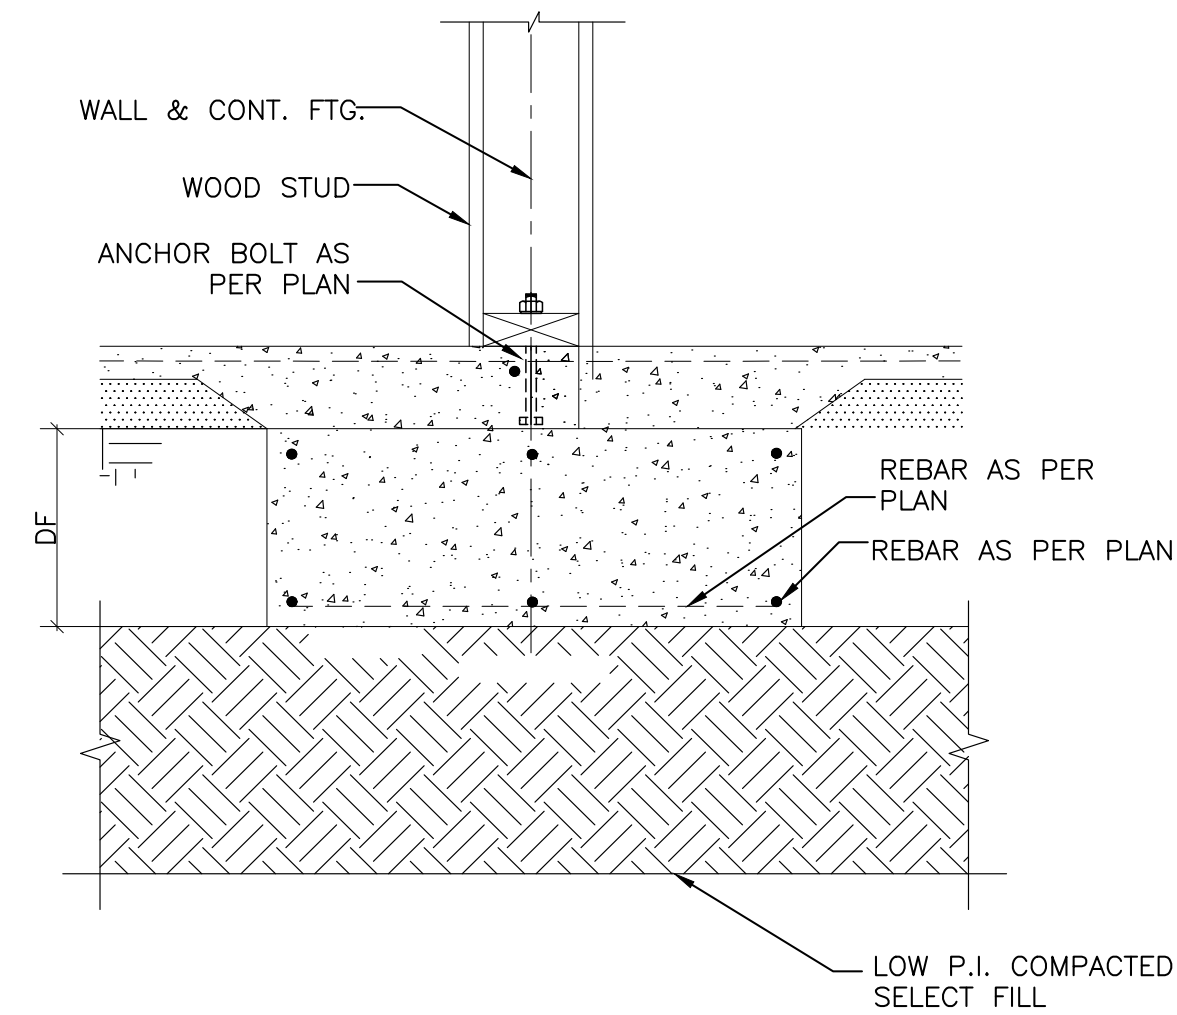


2 SECTION
SCALE: NTS

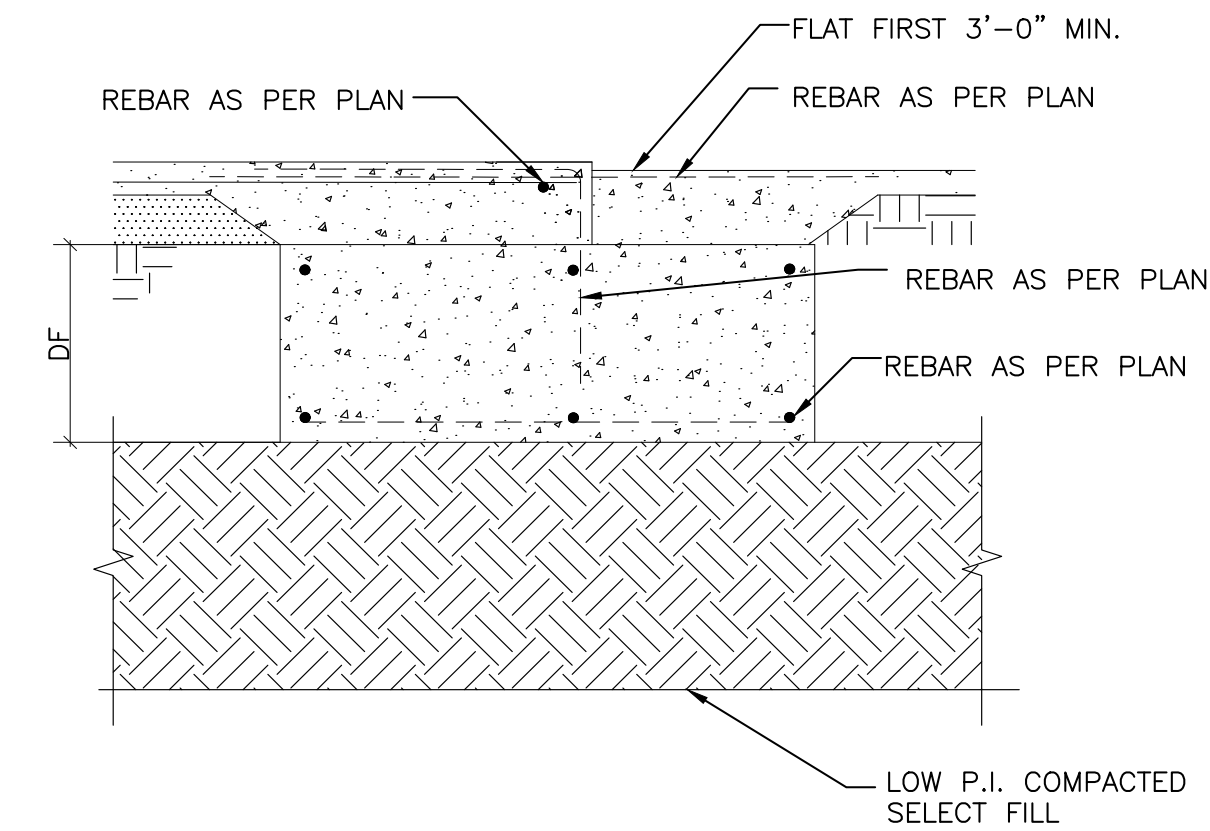


3 SECTION
SCALE: NTS

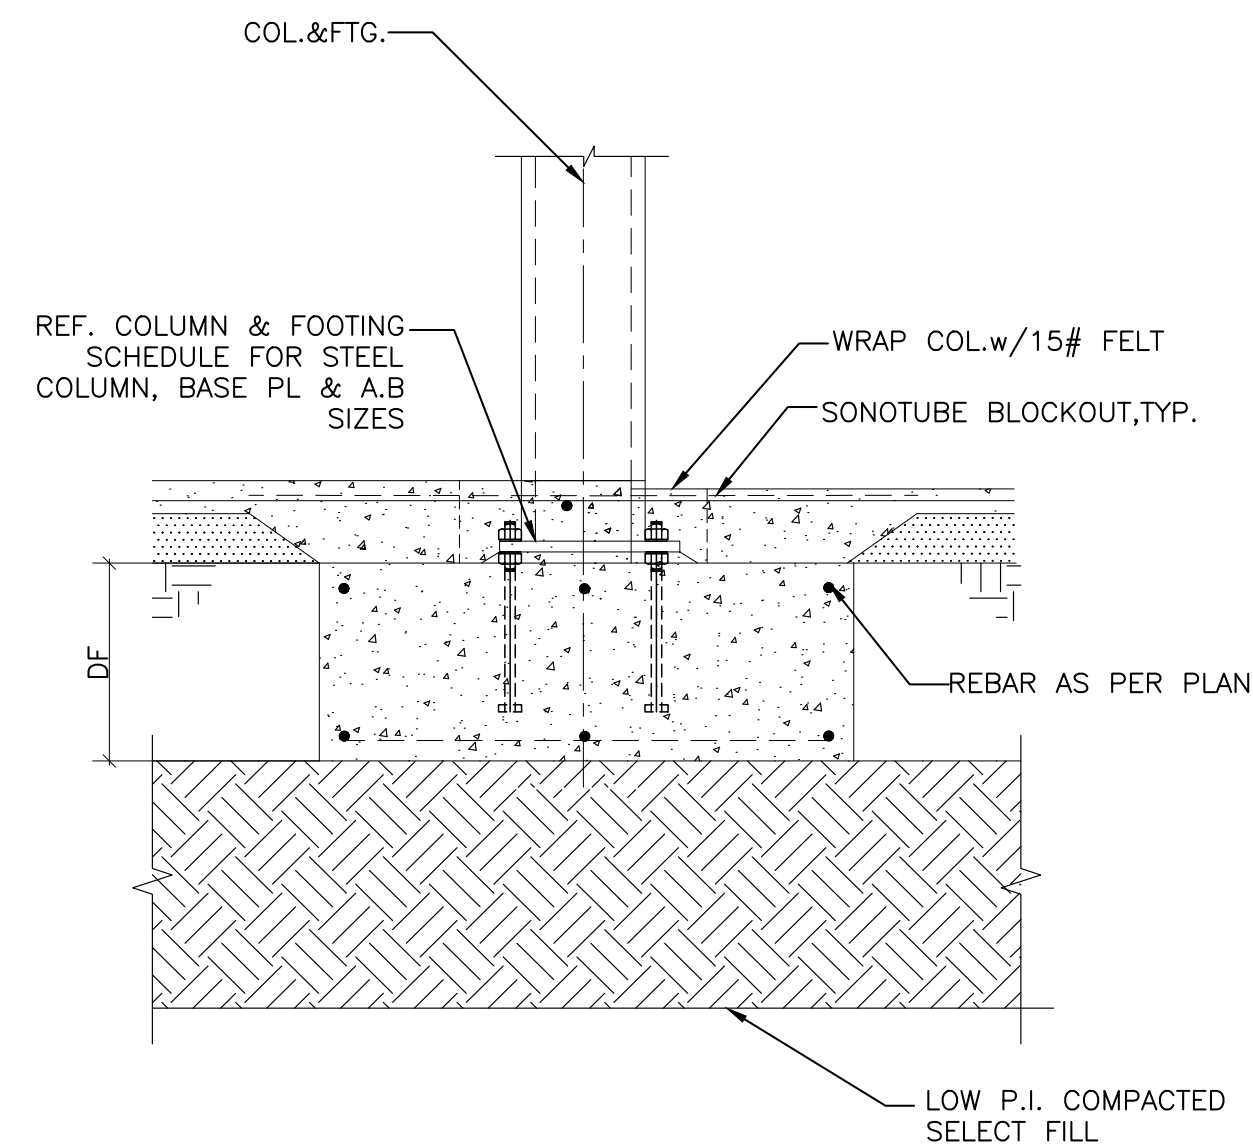


4 SECTION
SCALE: NTS

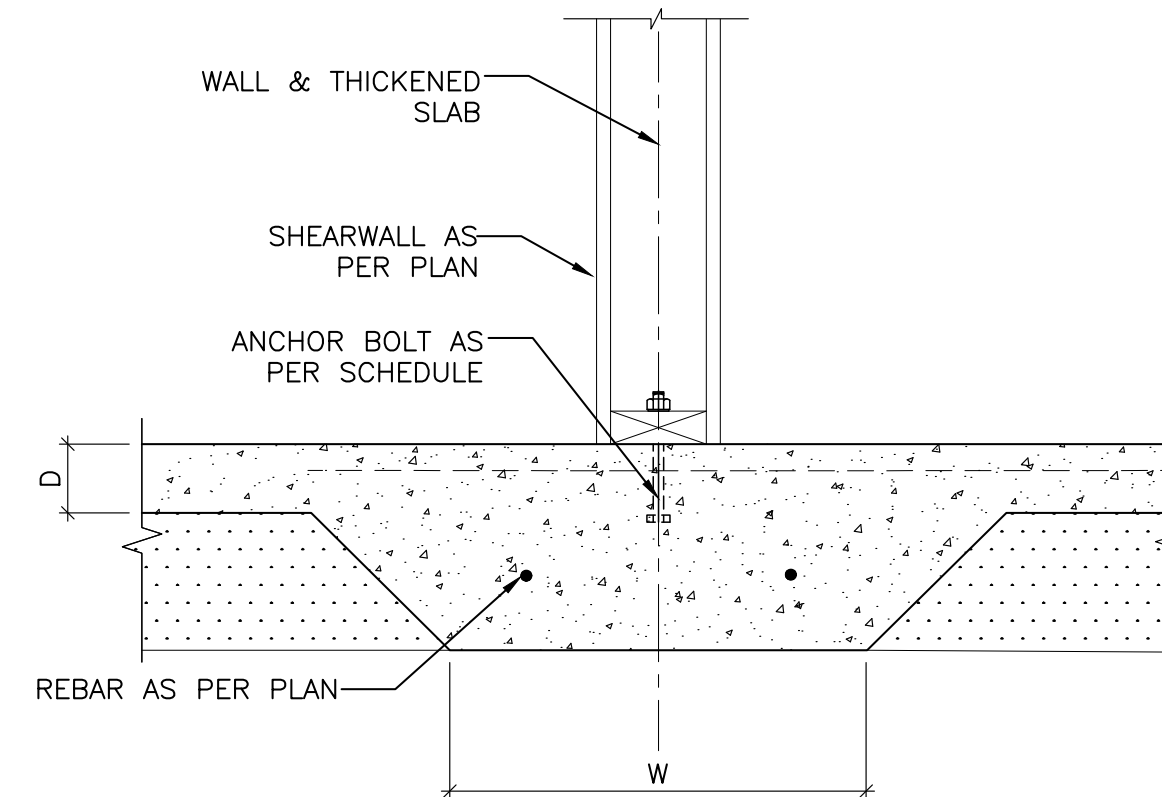

5 SECTION
SCALE: NTS

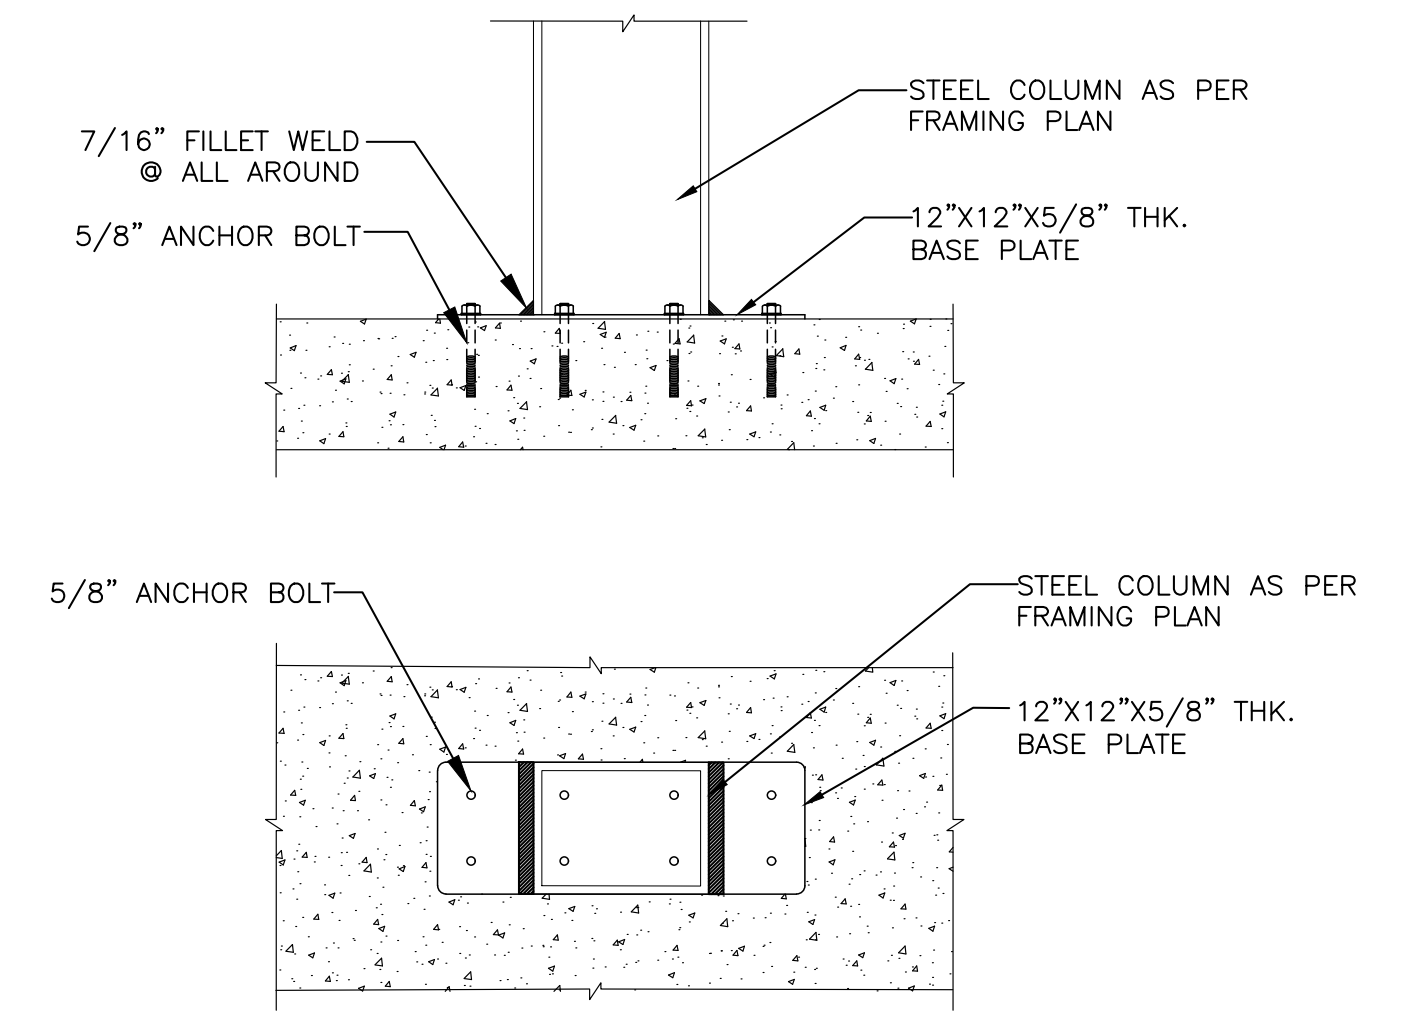

6 PLATE SECTION
SCALE: NTS

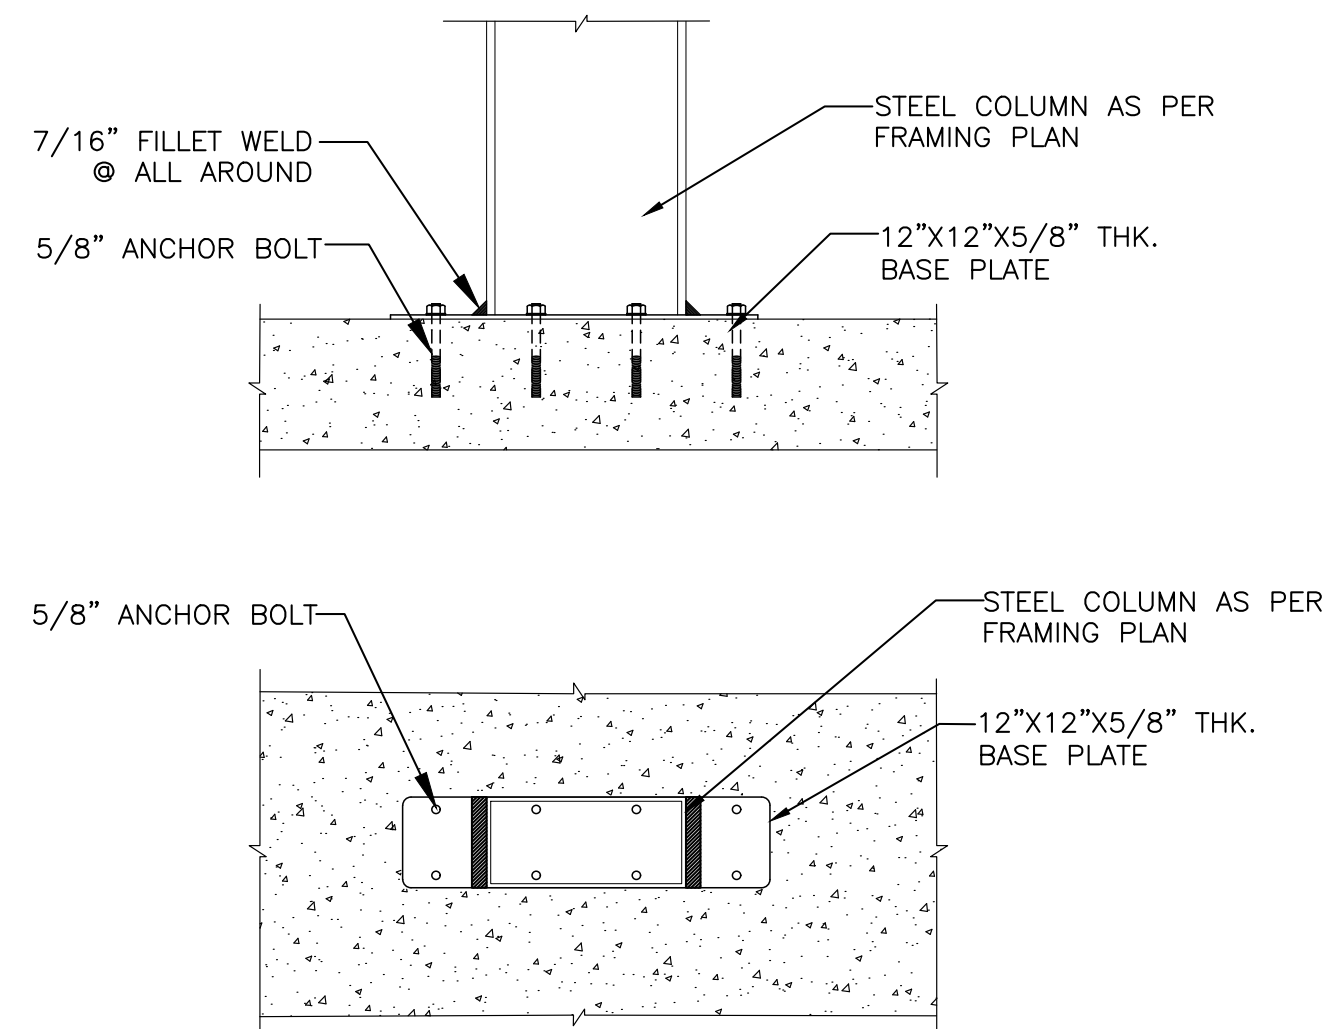

7 PLATE SECTION
SCALE: NTS

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jhsanford@aol.com
COPYRIGHT 2006 John Sanford

6-08-2026
NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

DEVELOPED BY
HI-TECH
HOSPITALITY

Residence Inn
BY MARRIOTT

**RESIDENCE INN BY
MARRIOTT**












NW CORNER OF PINE &
MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR
REVIEW AND PERMITTING. DRAWINGS
ARE NOT TO BE USED FOR
CONSTRUCTION WITHOUT ARCHITECT'S
AND ENGINEER'S SIGNATURE AND THEIR
DATE OF ISSUE FOR CONSTRUCTION.

No.	Description	Date

TULSA AIRPORT RIBM
61208
Project Number

SHEET
S143
DETAILS

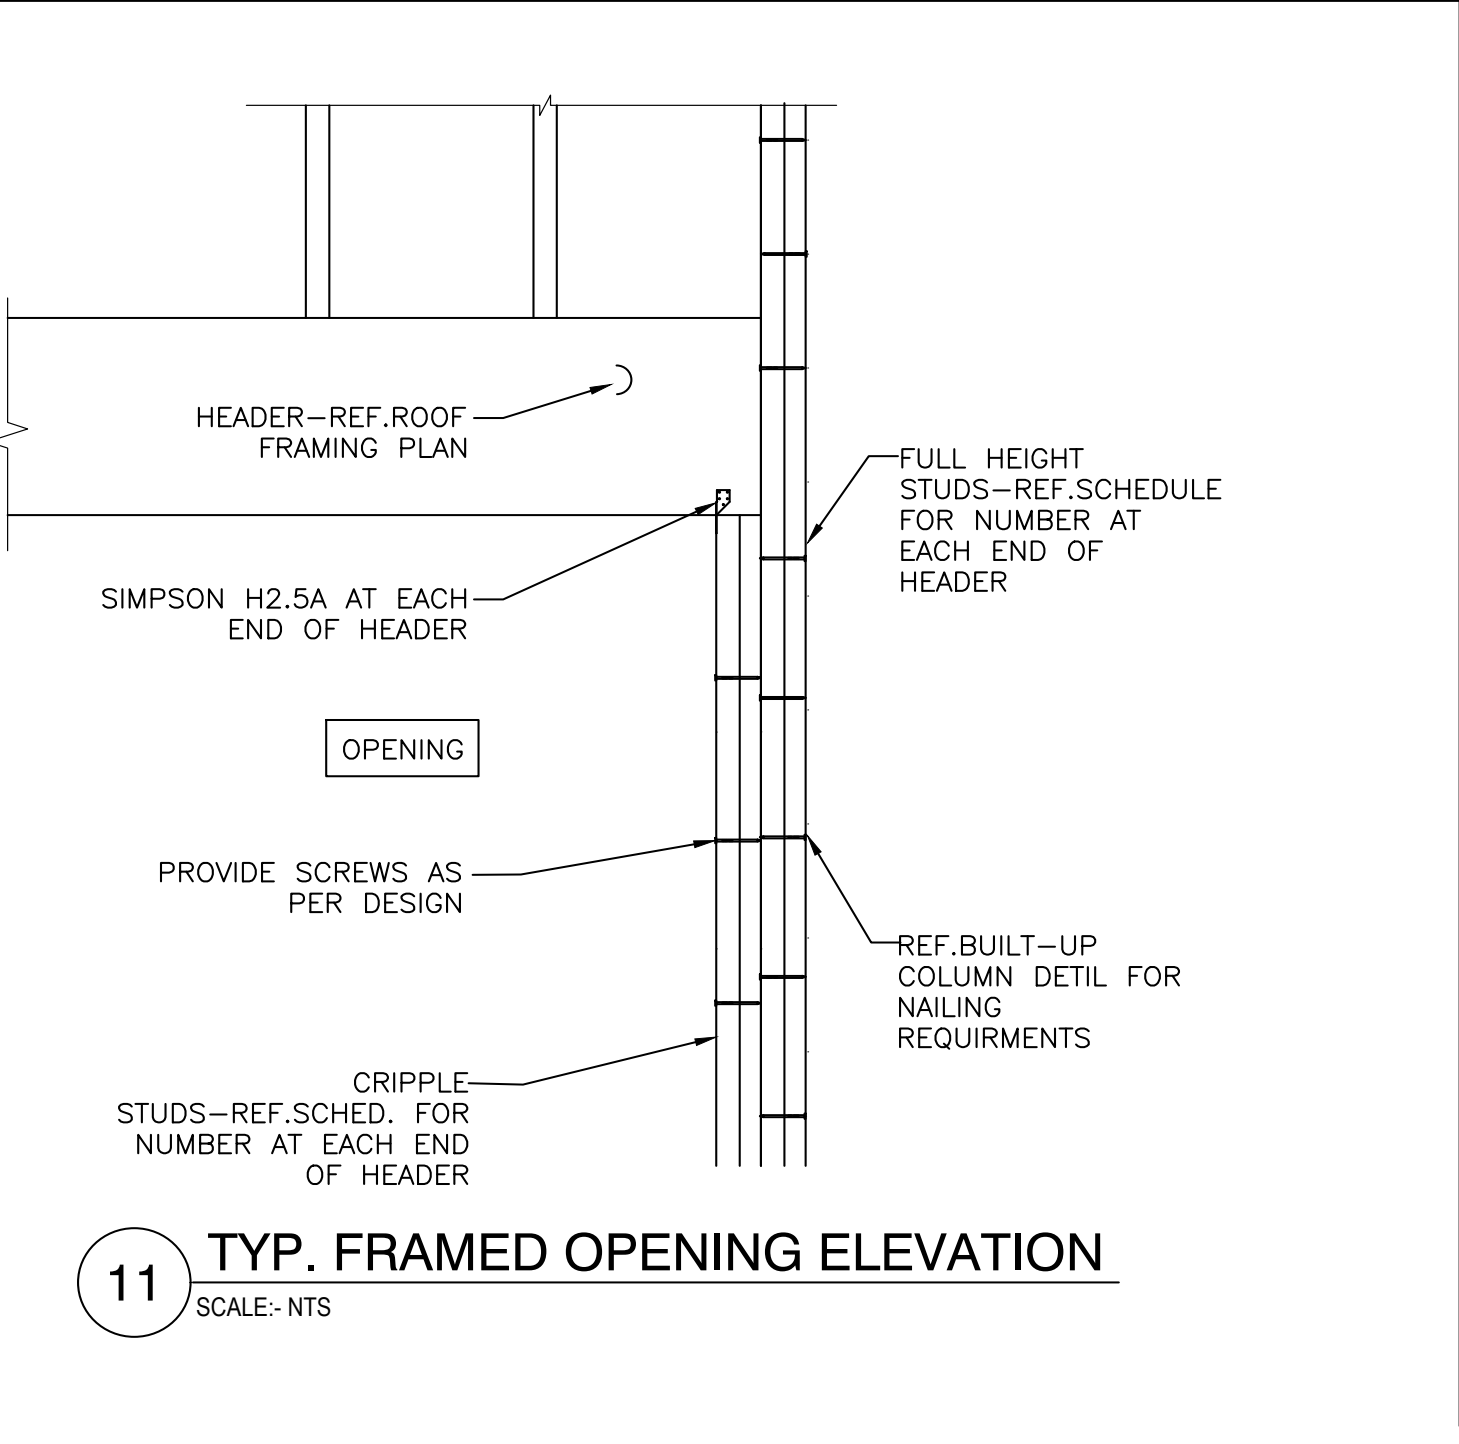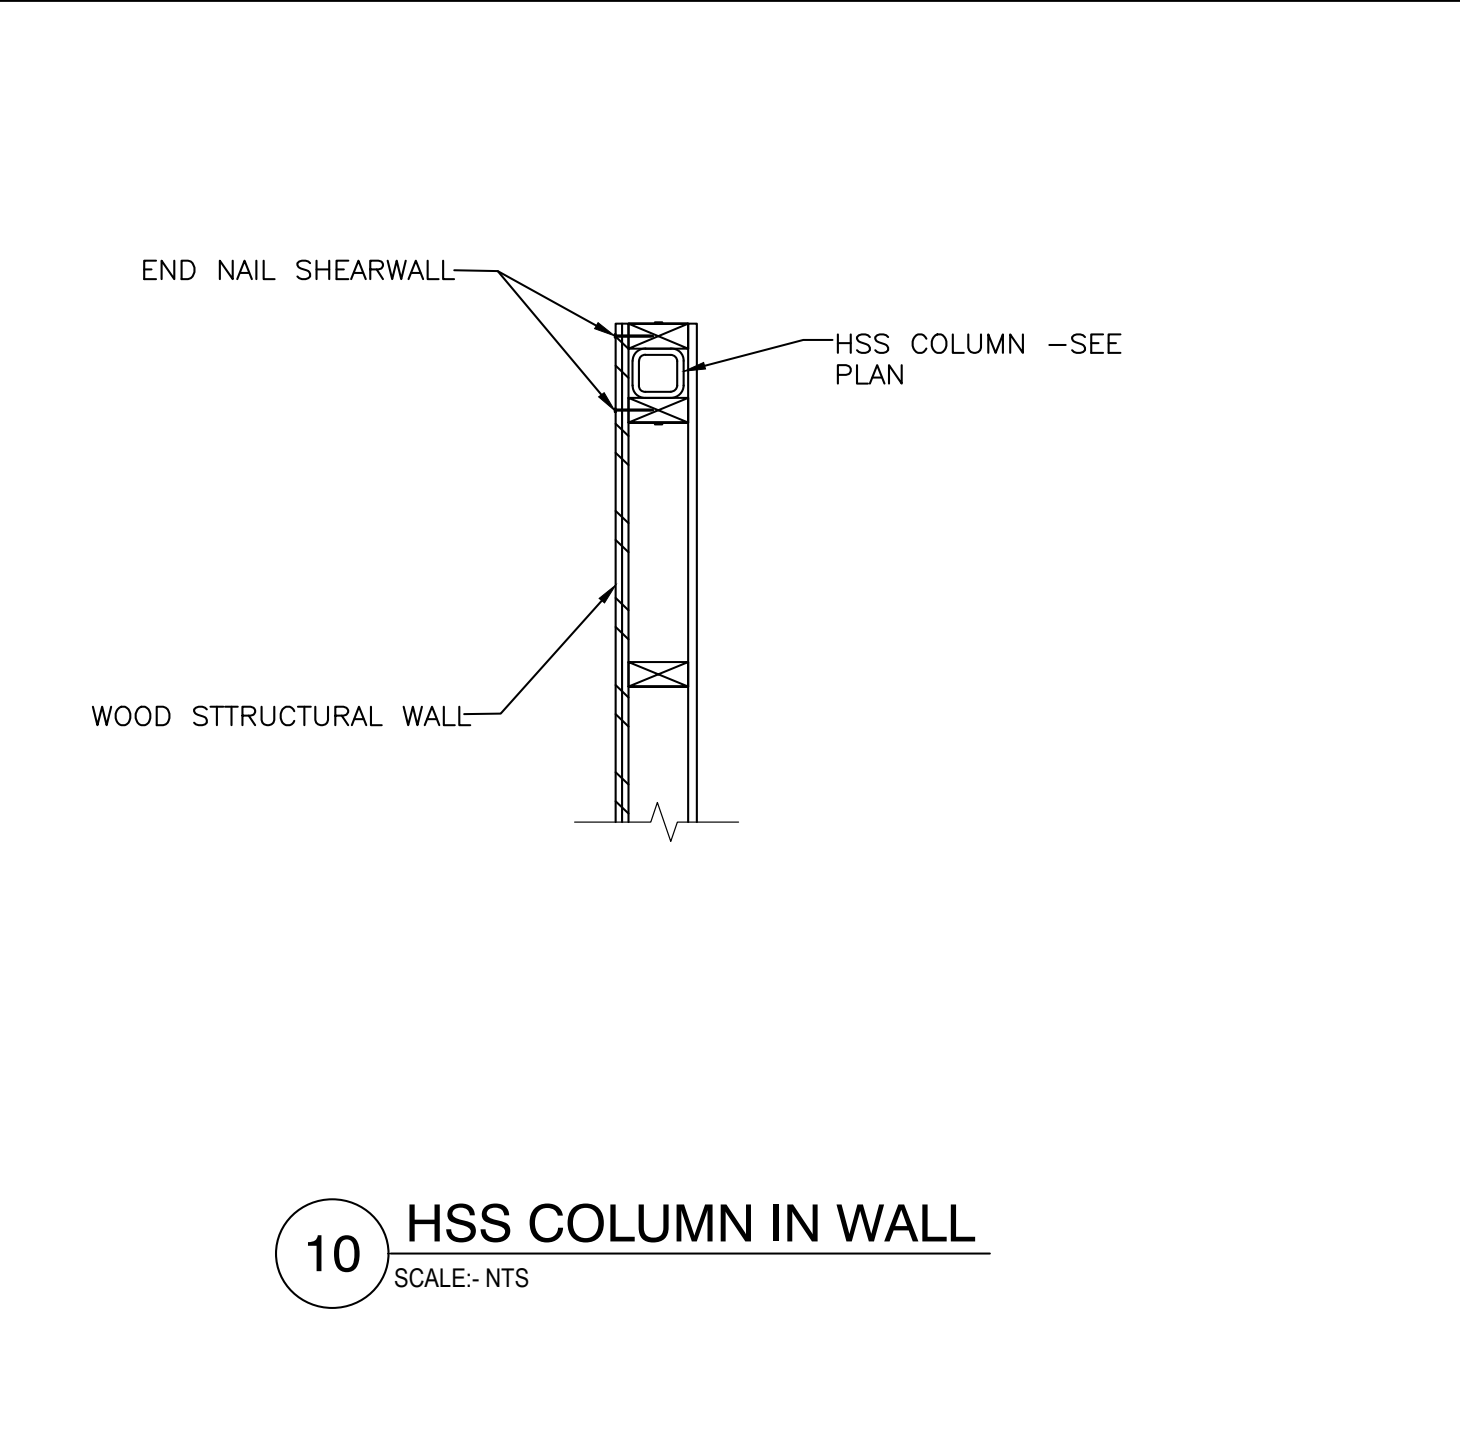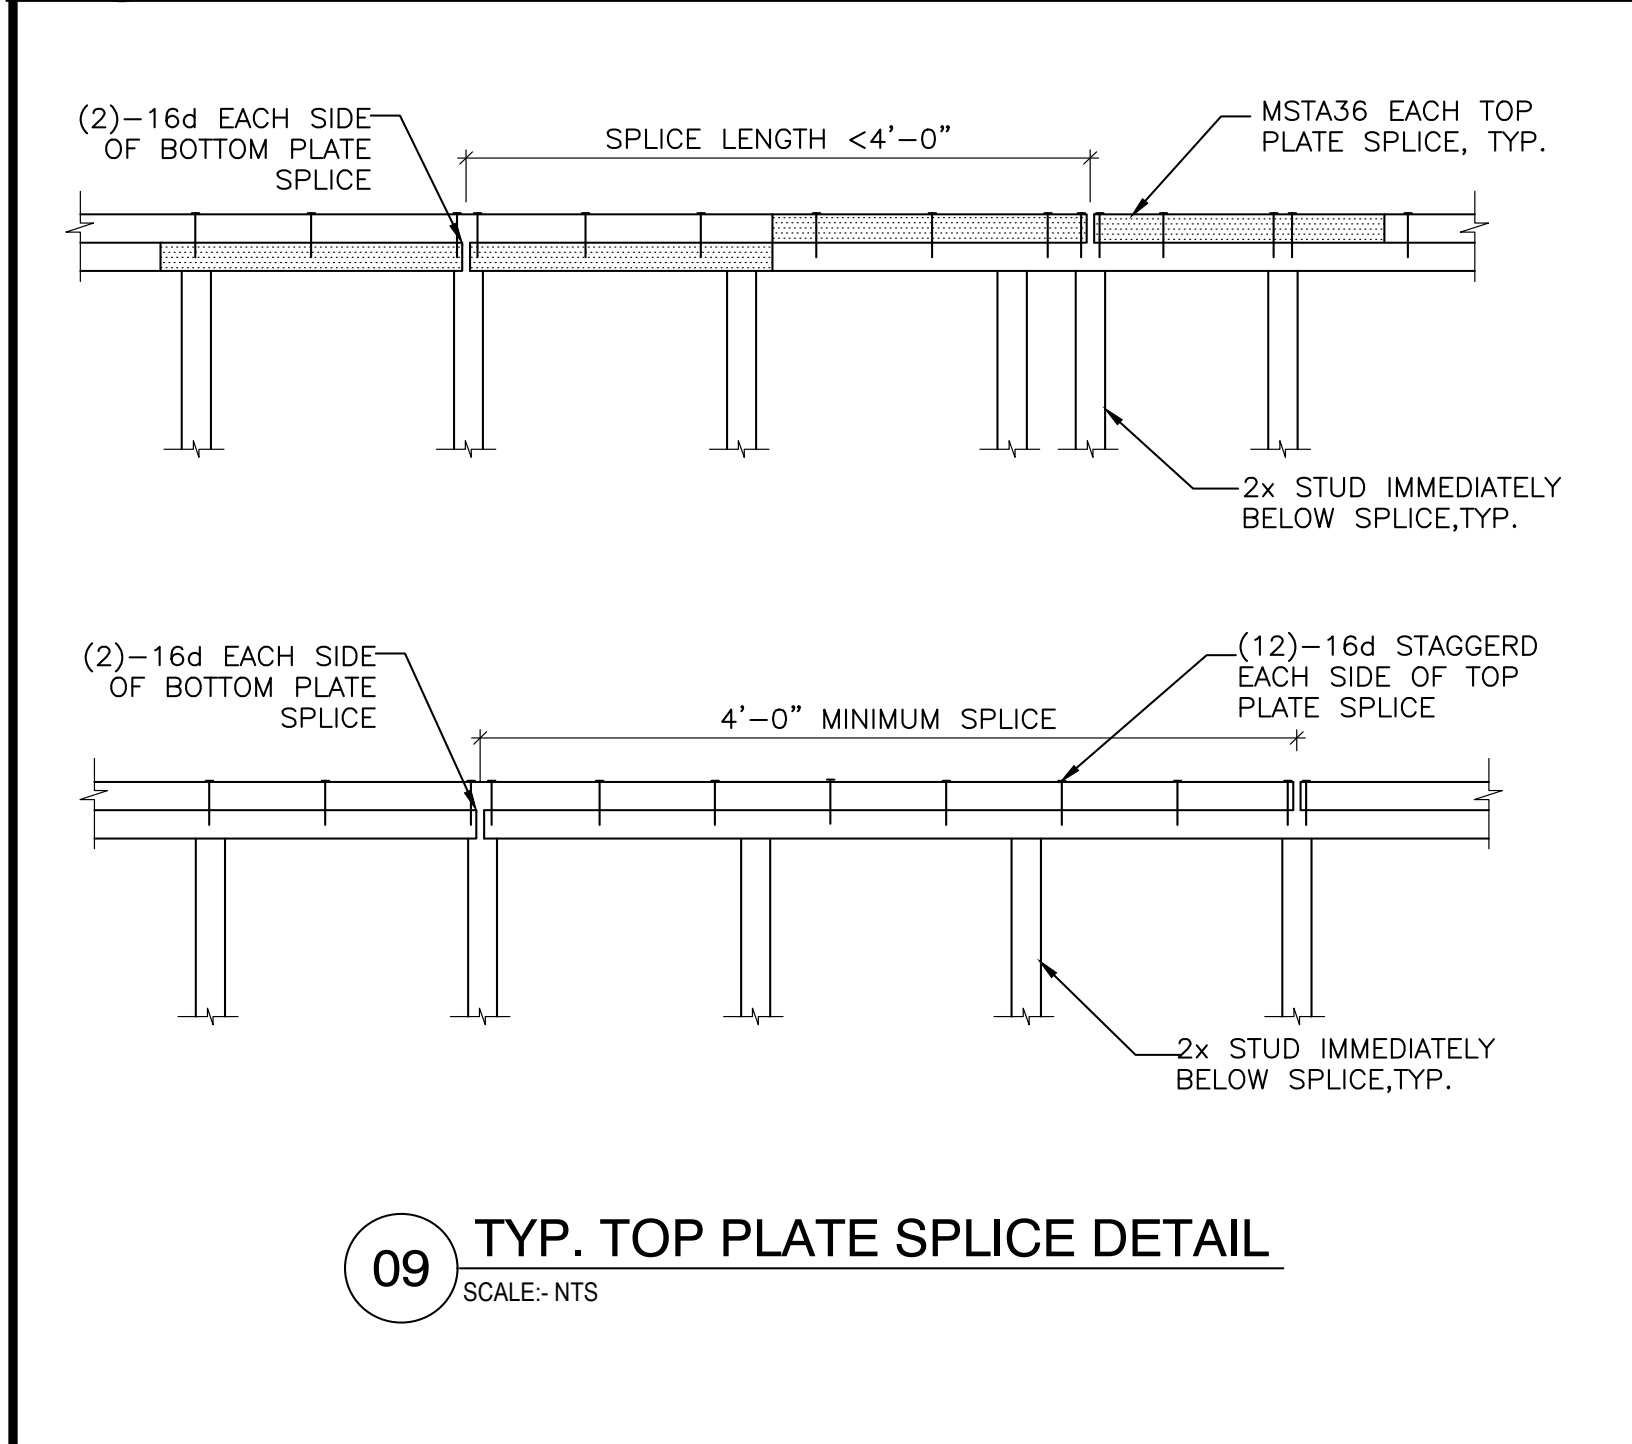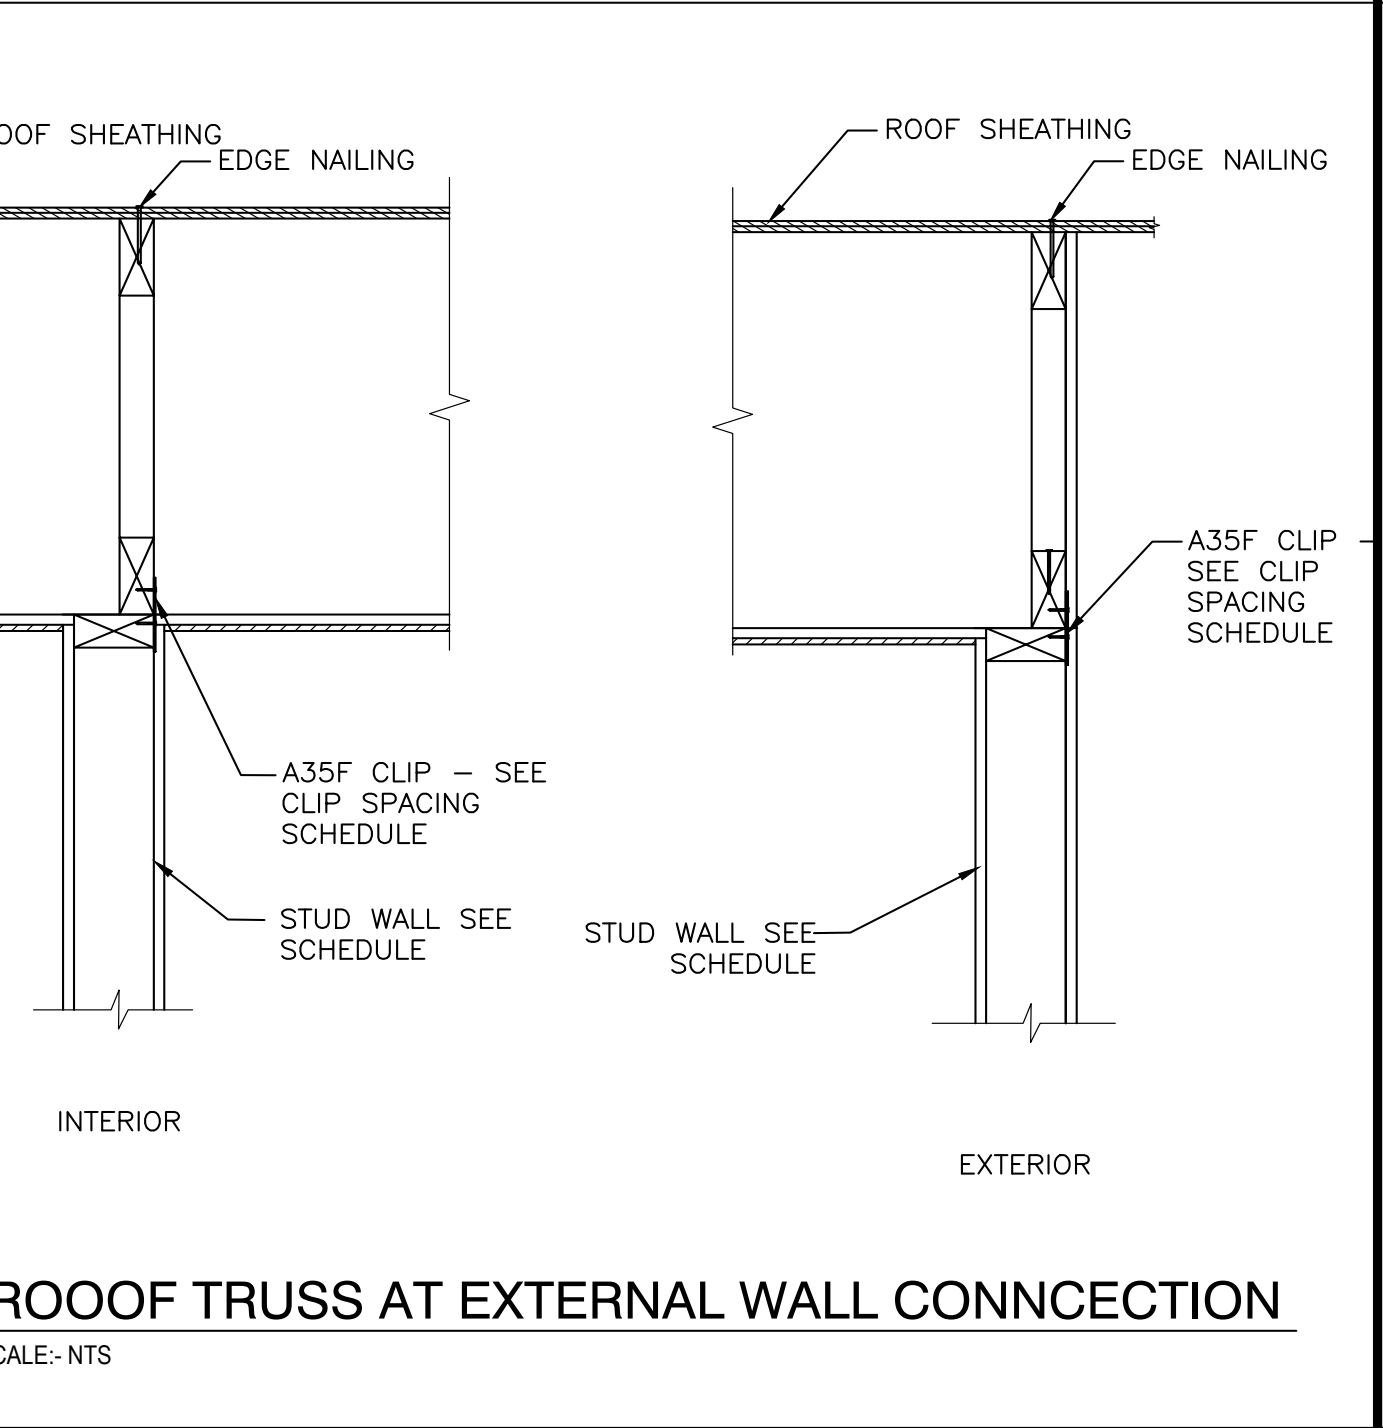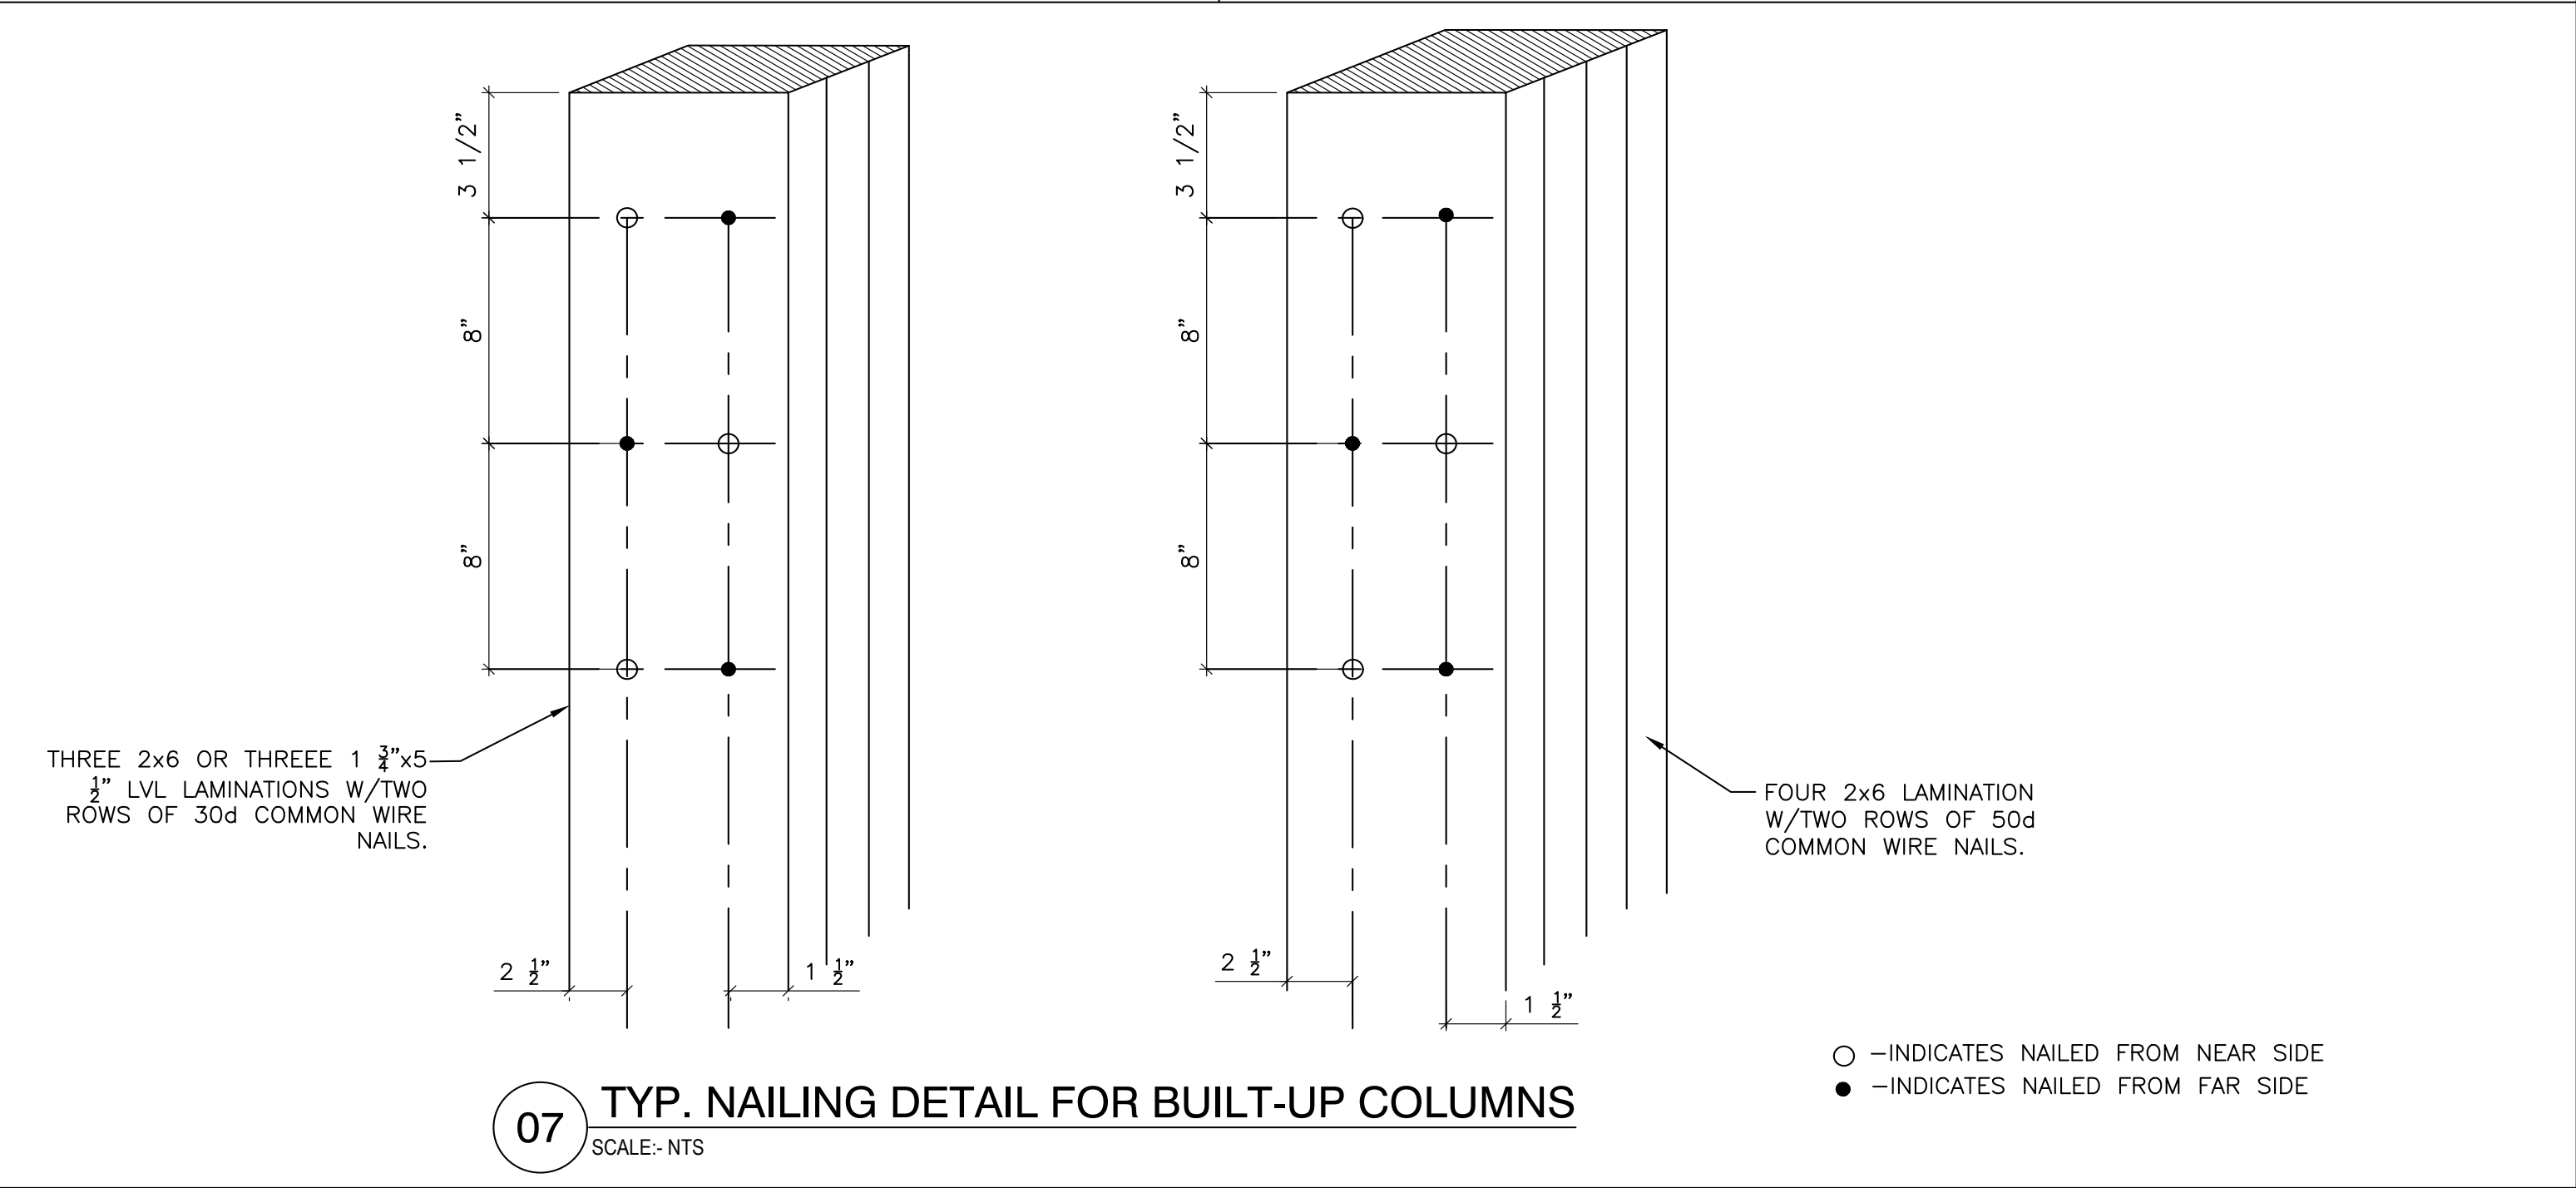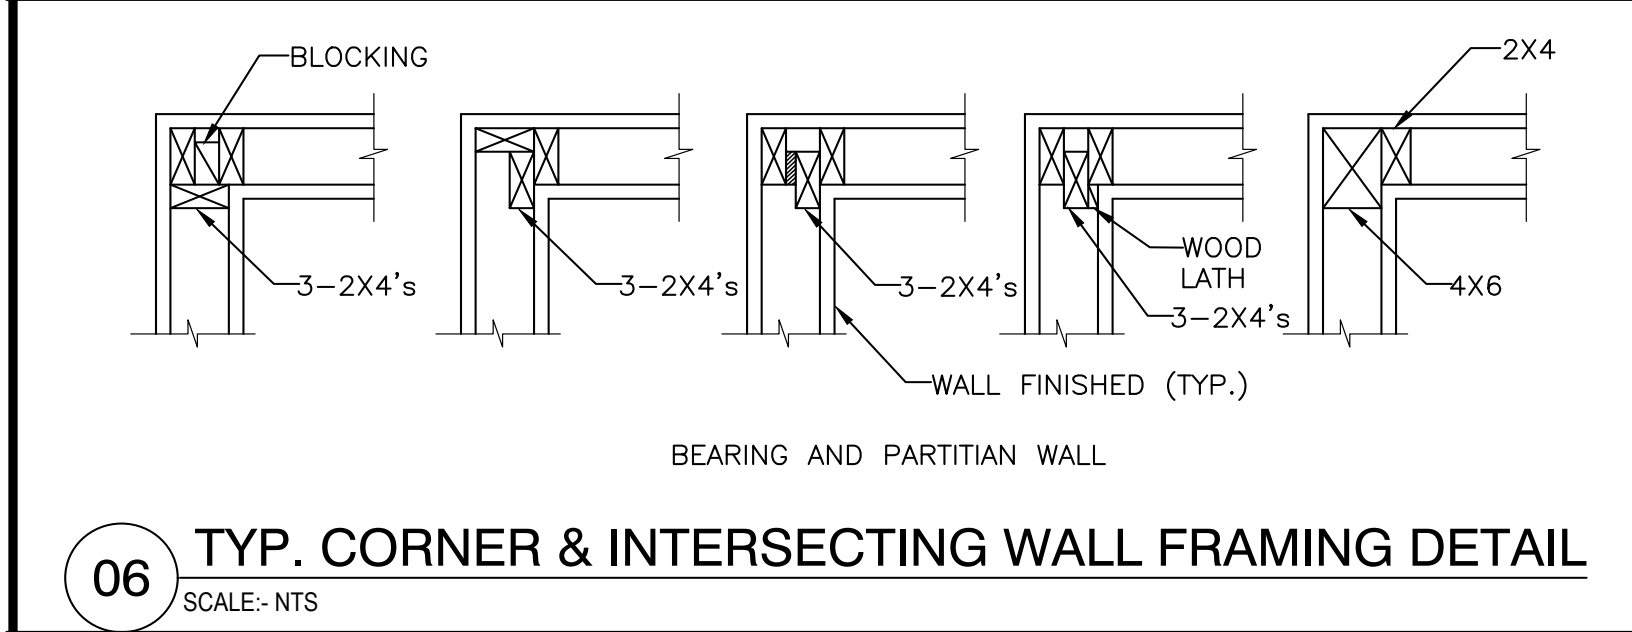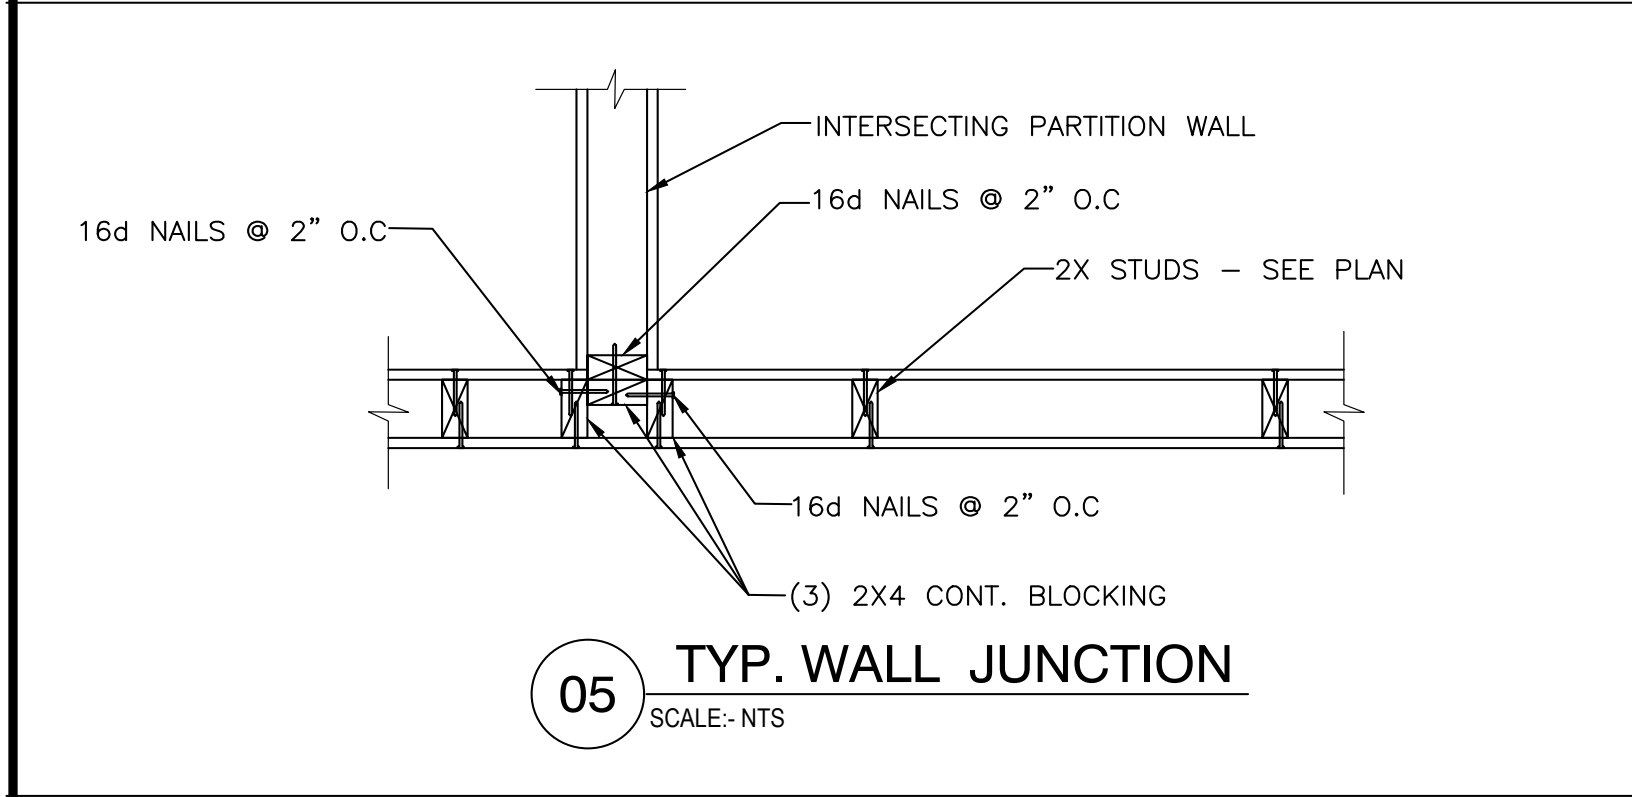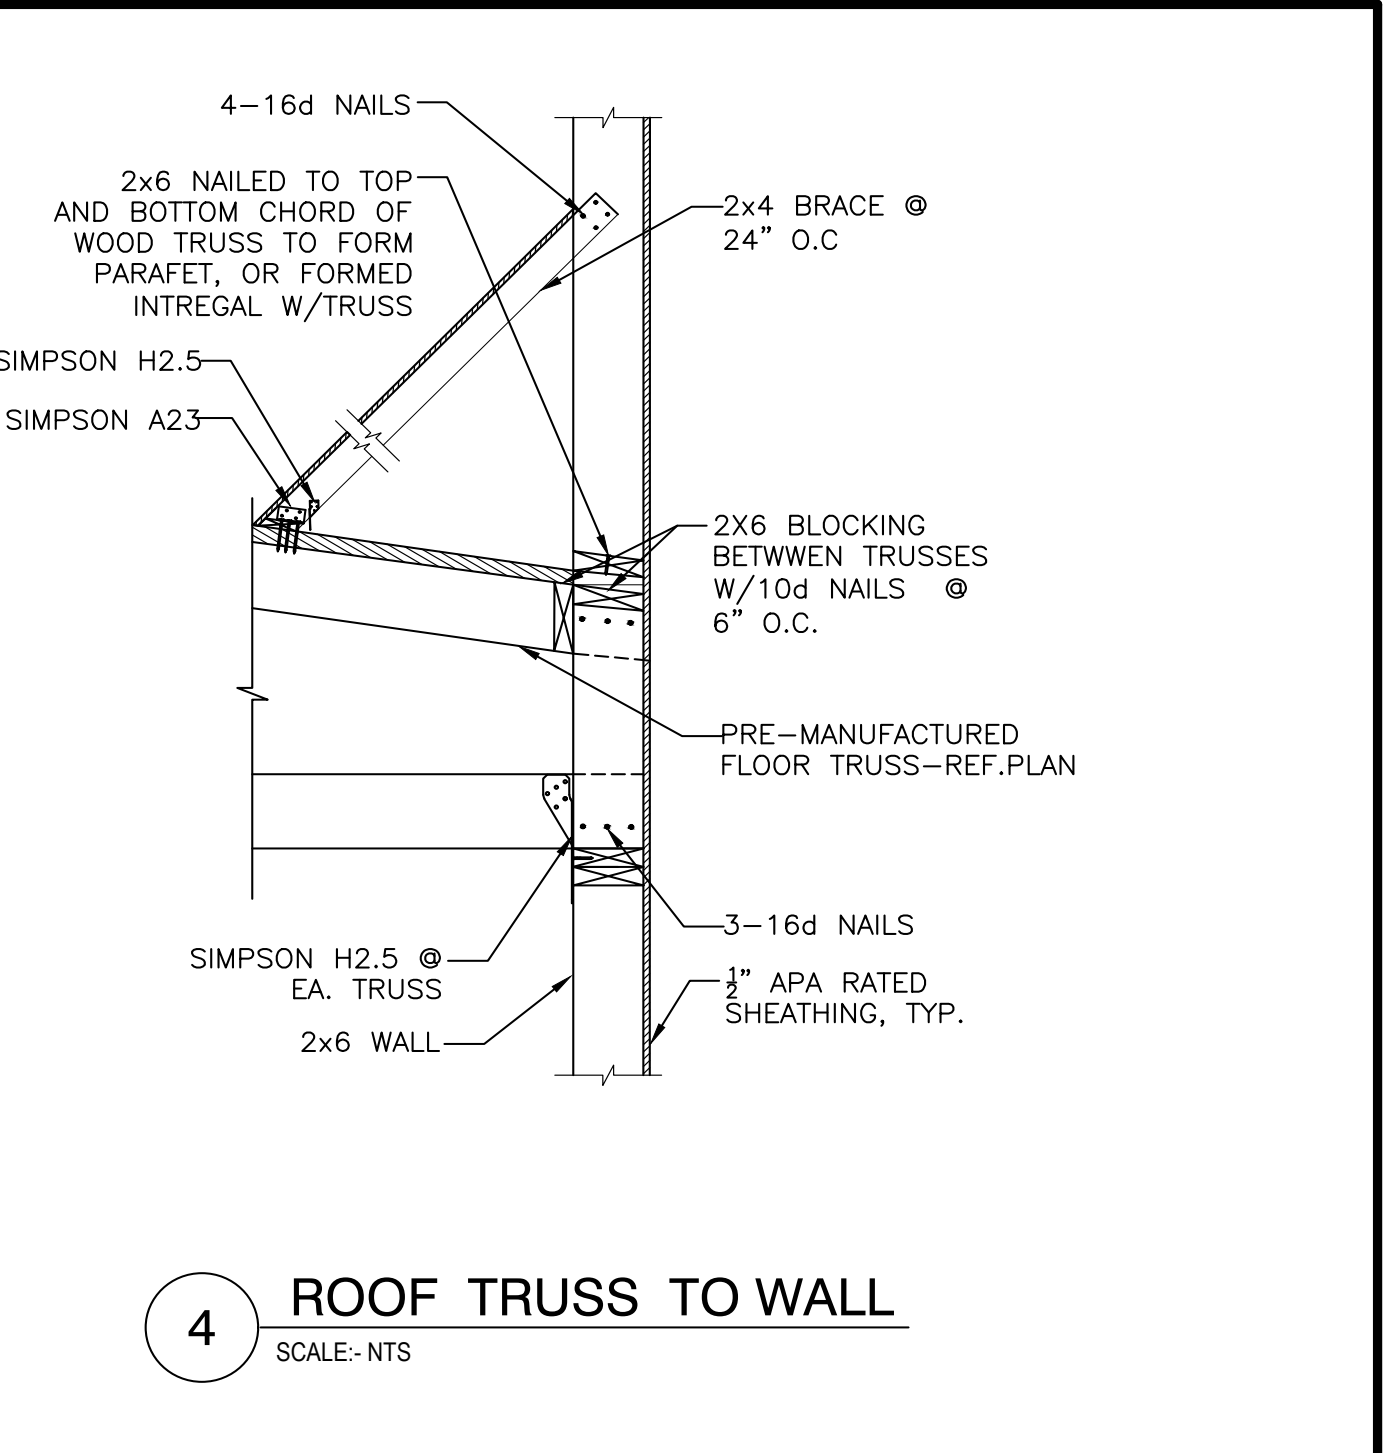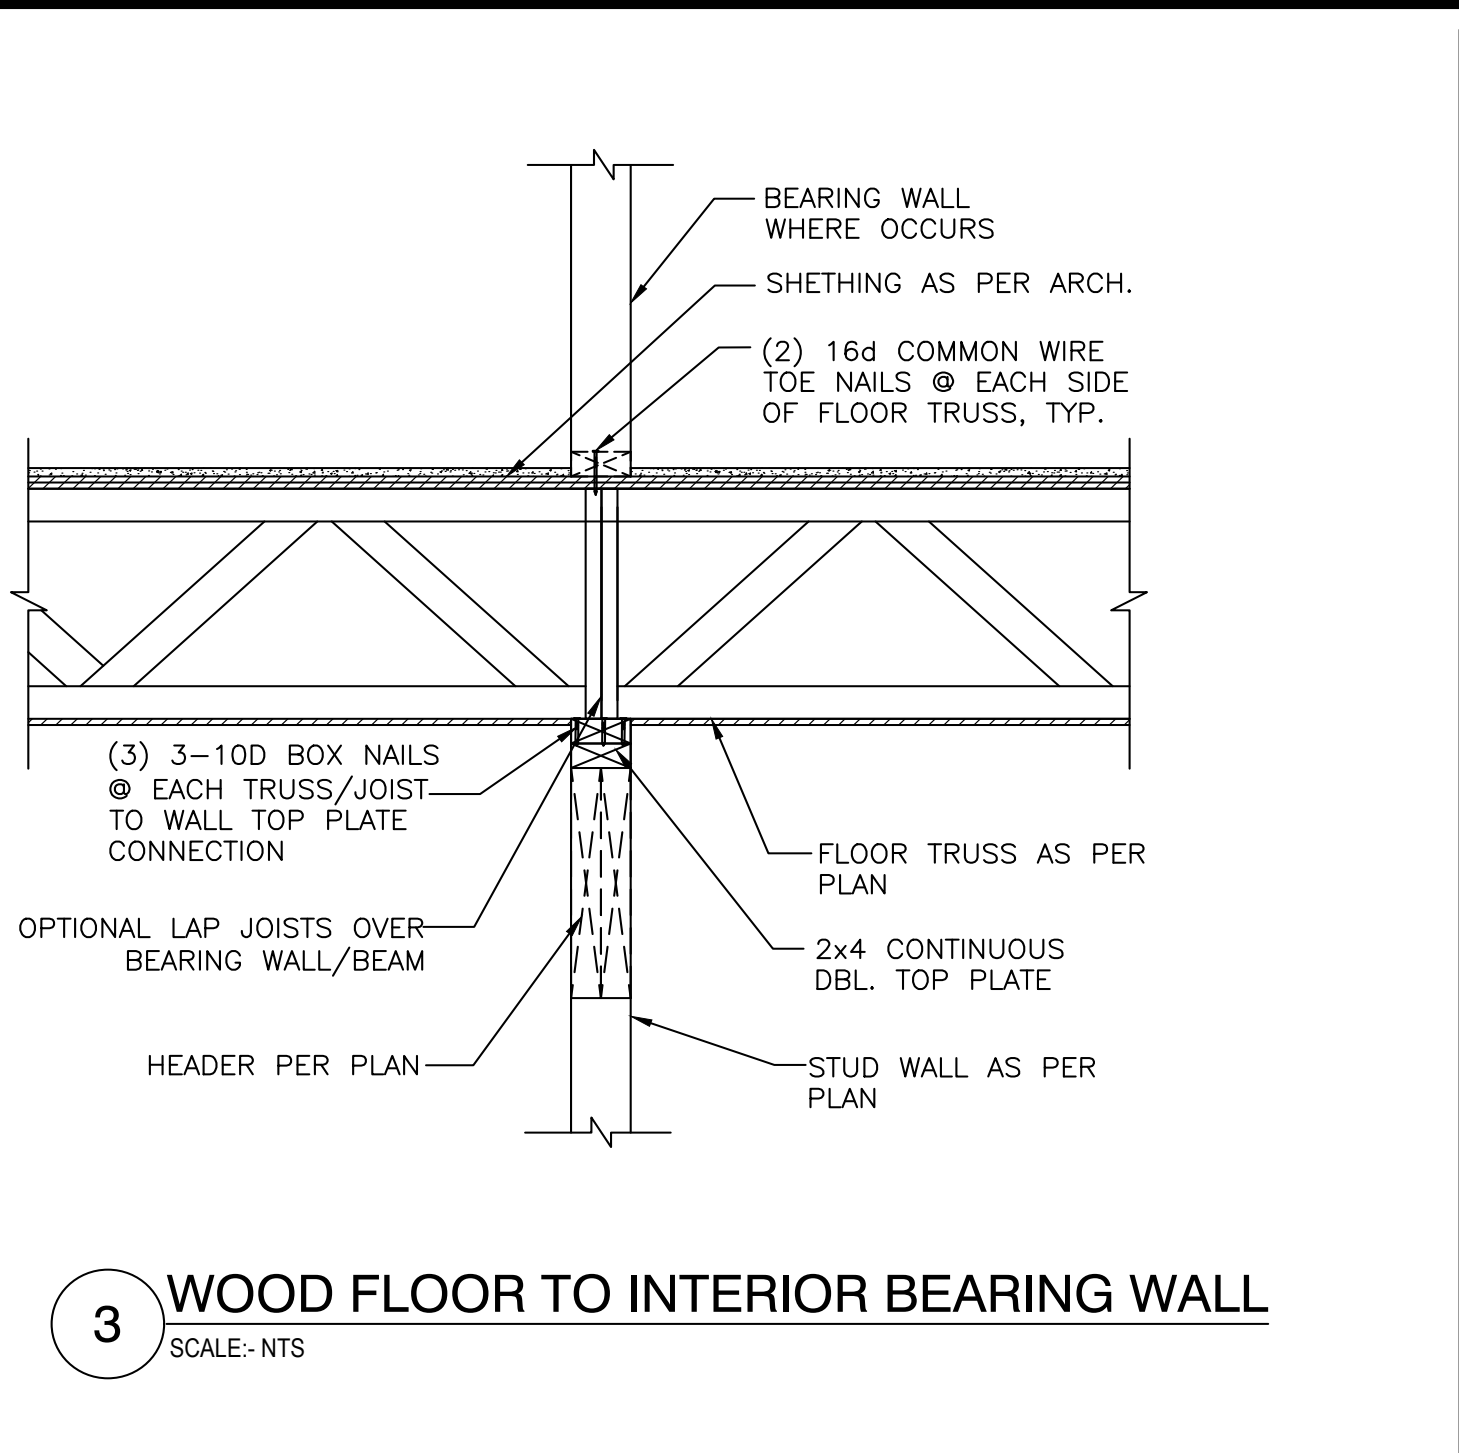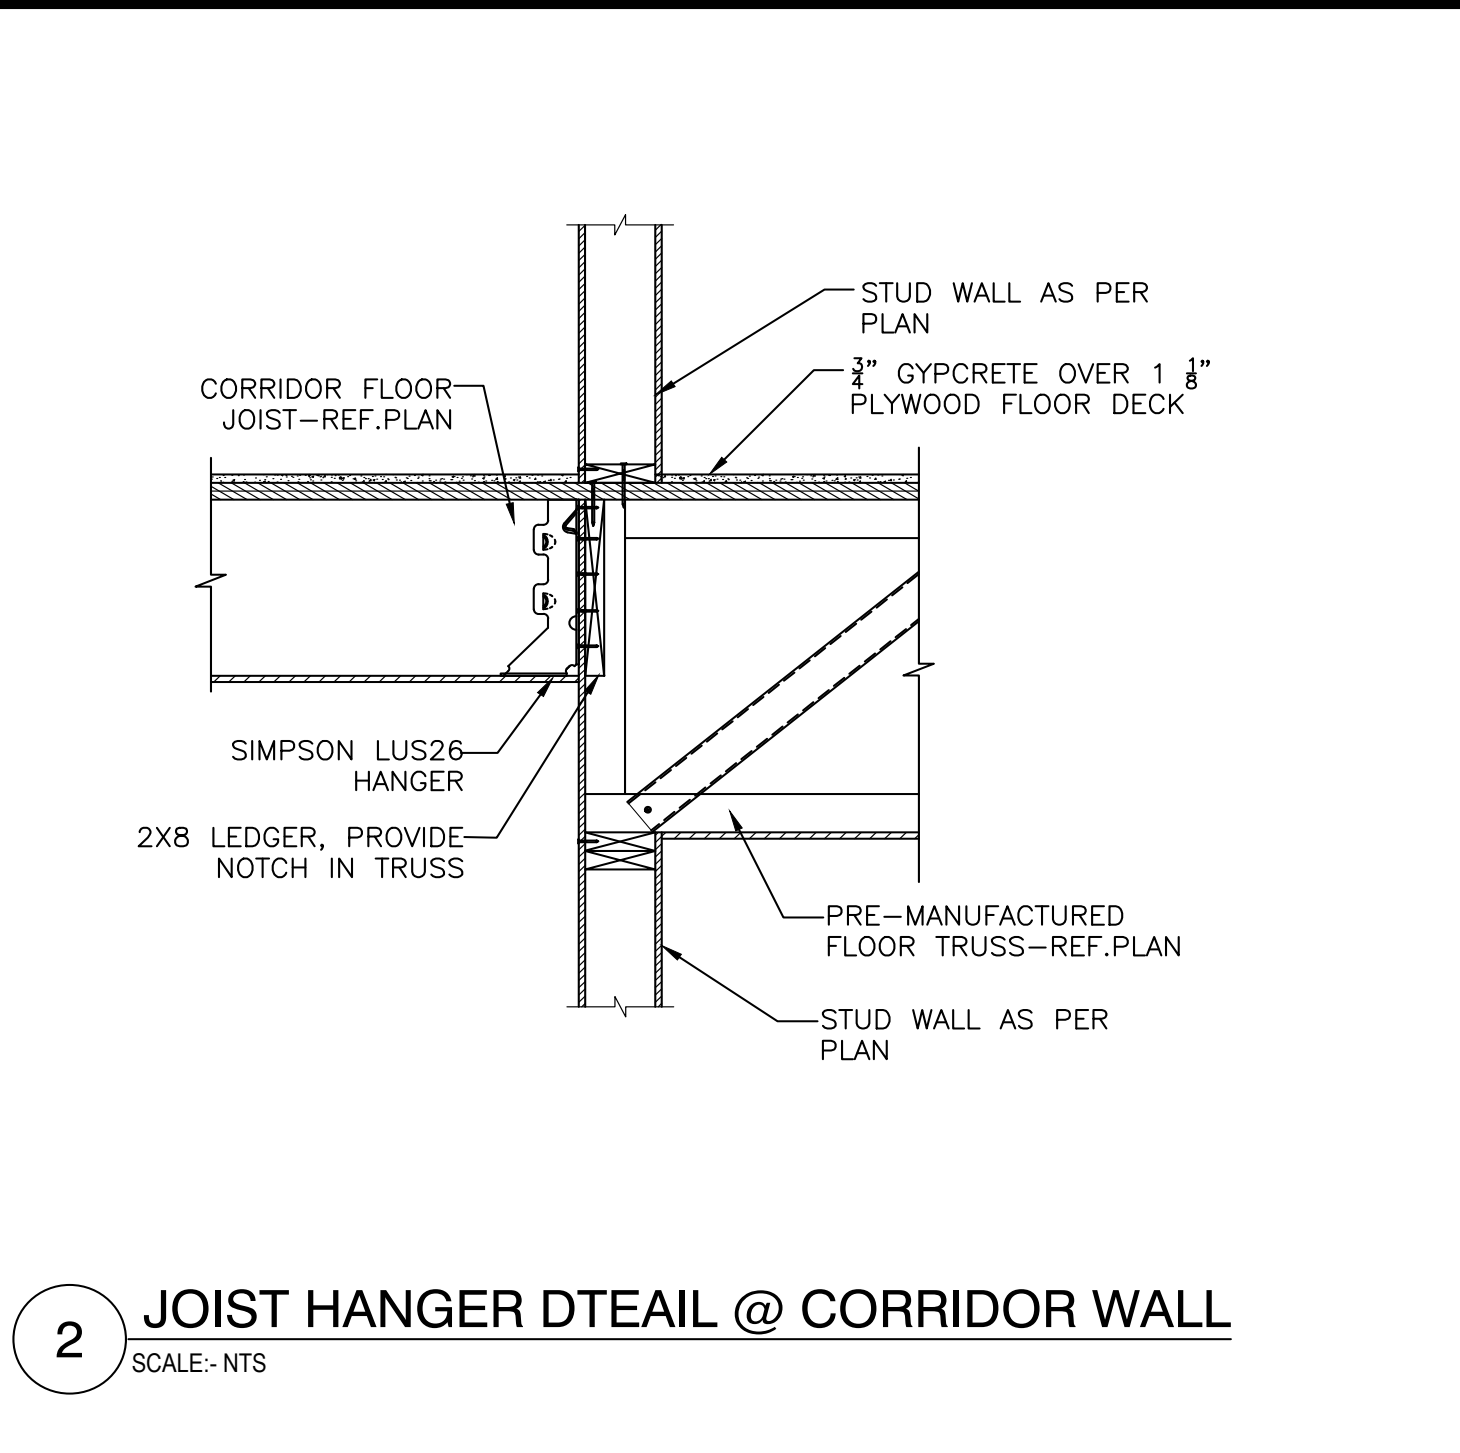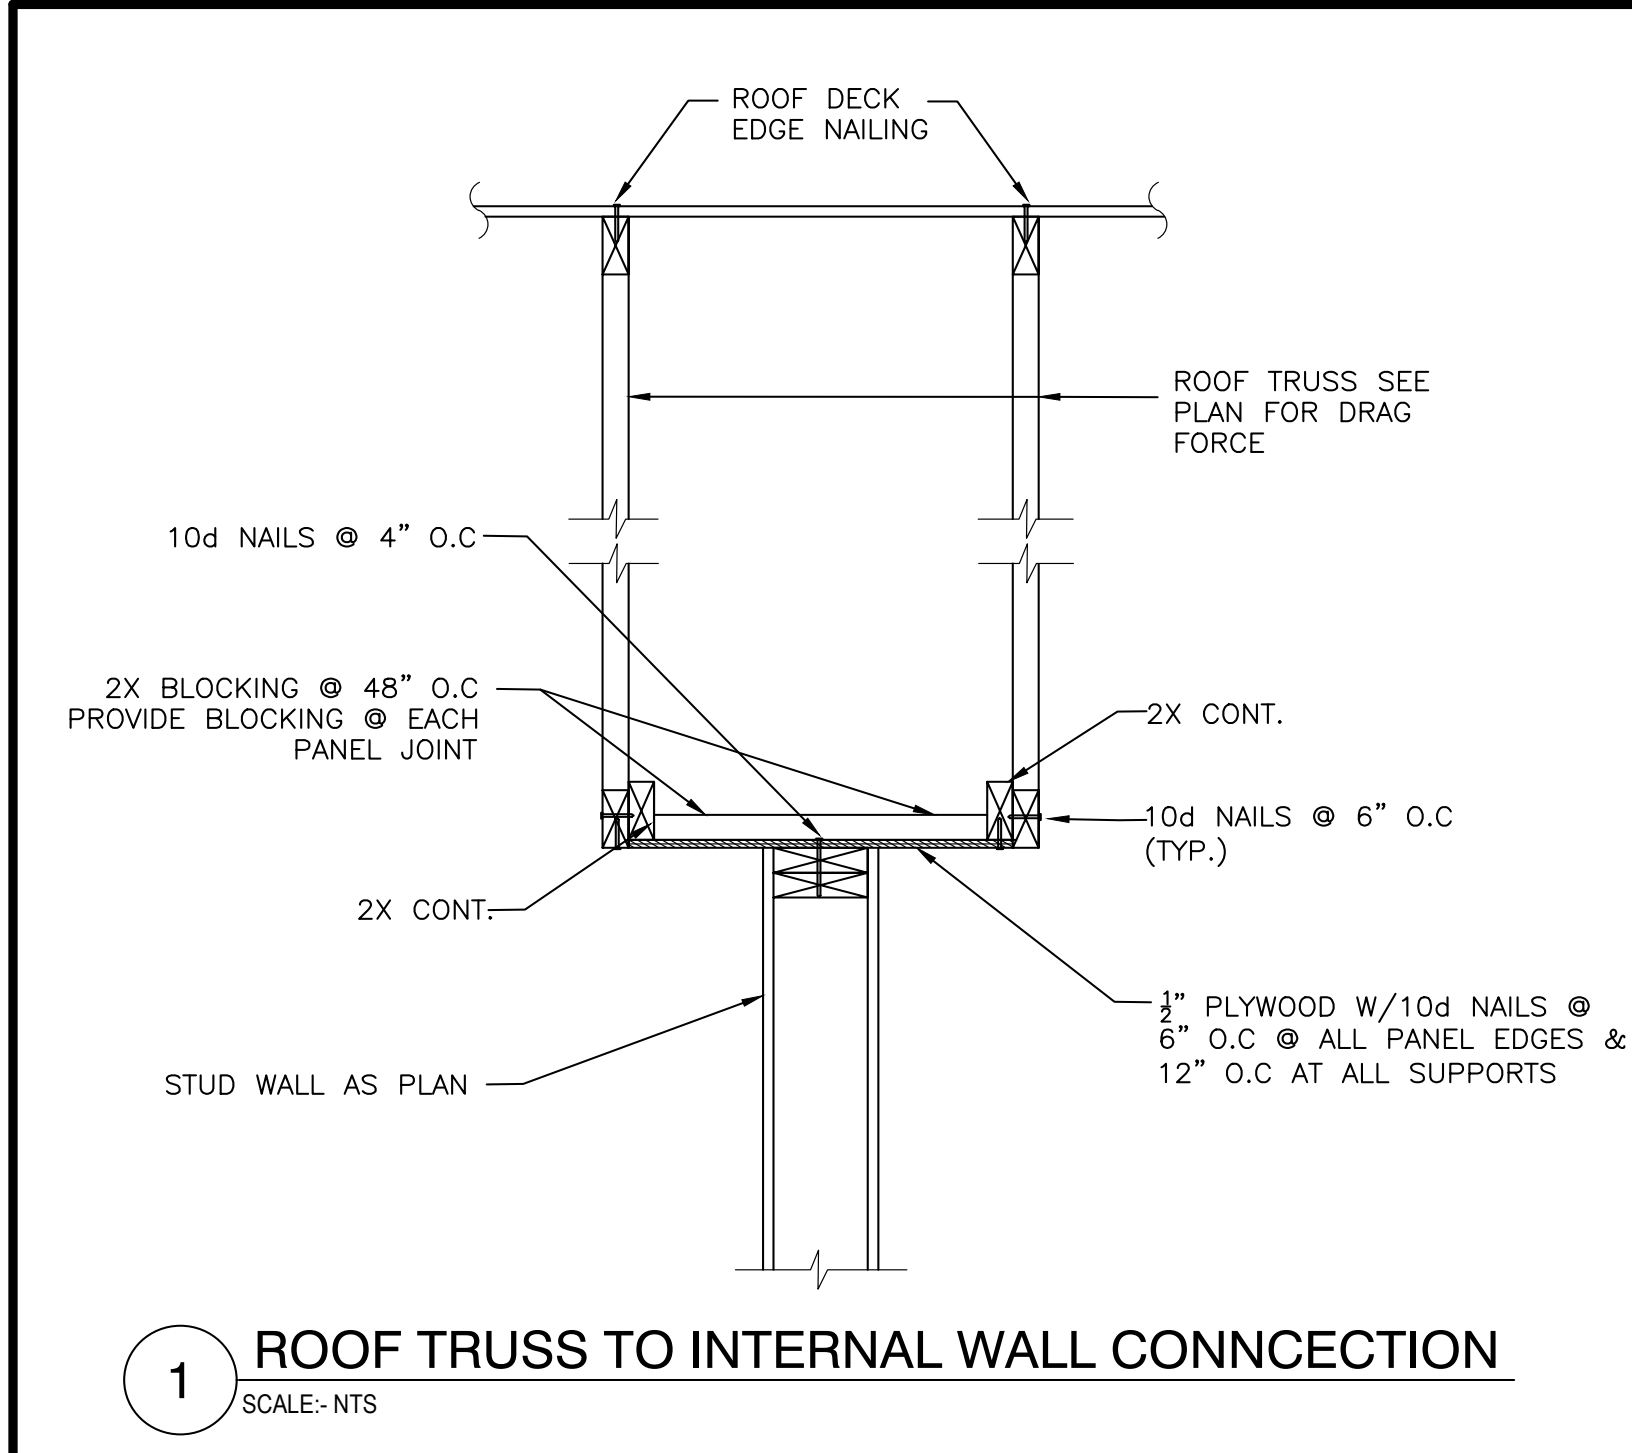

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jhsanford@aol.com
COPYRIGHT 2026 John Sanford

6-08-2026
NOT VALID FOR CONSTRUCTION
UNLESS SIGNED IN THIS BLOCK

DEVELOPED BY
HI-TECH HOSPITALITY

Residence Inn
BY MARRIOTT

RESIDENCE INN BY MARRIOTT


NW CORNER OF PINE & MEMORIAL, TULSA, OK

THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECT'S AND ENGINEER'S SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION.


No.	Description	Date

TULSA AIRPORT RIBM
61208
Project Number


S144
DETAILS

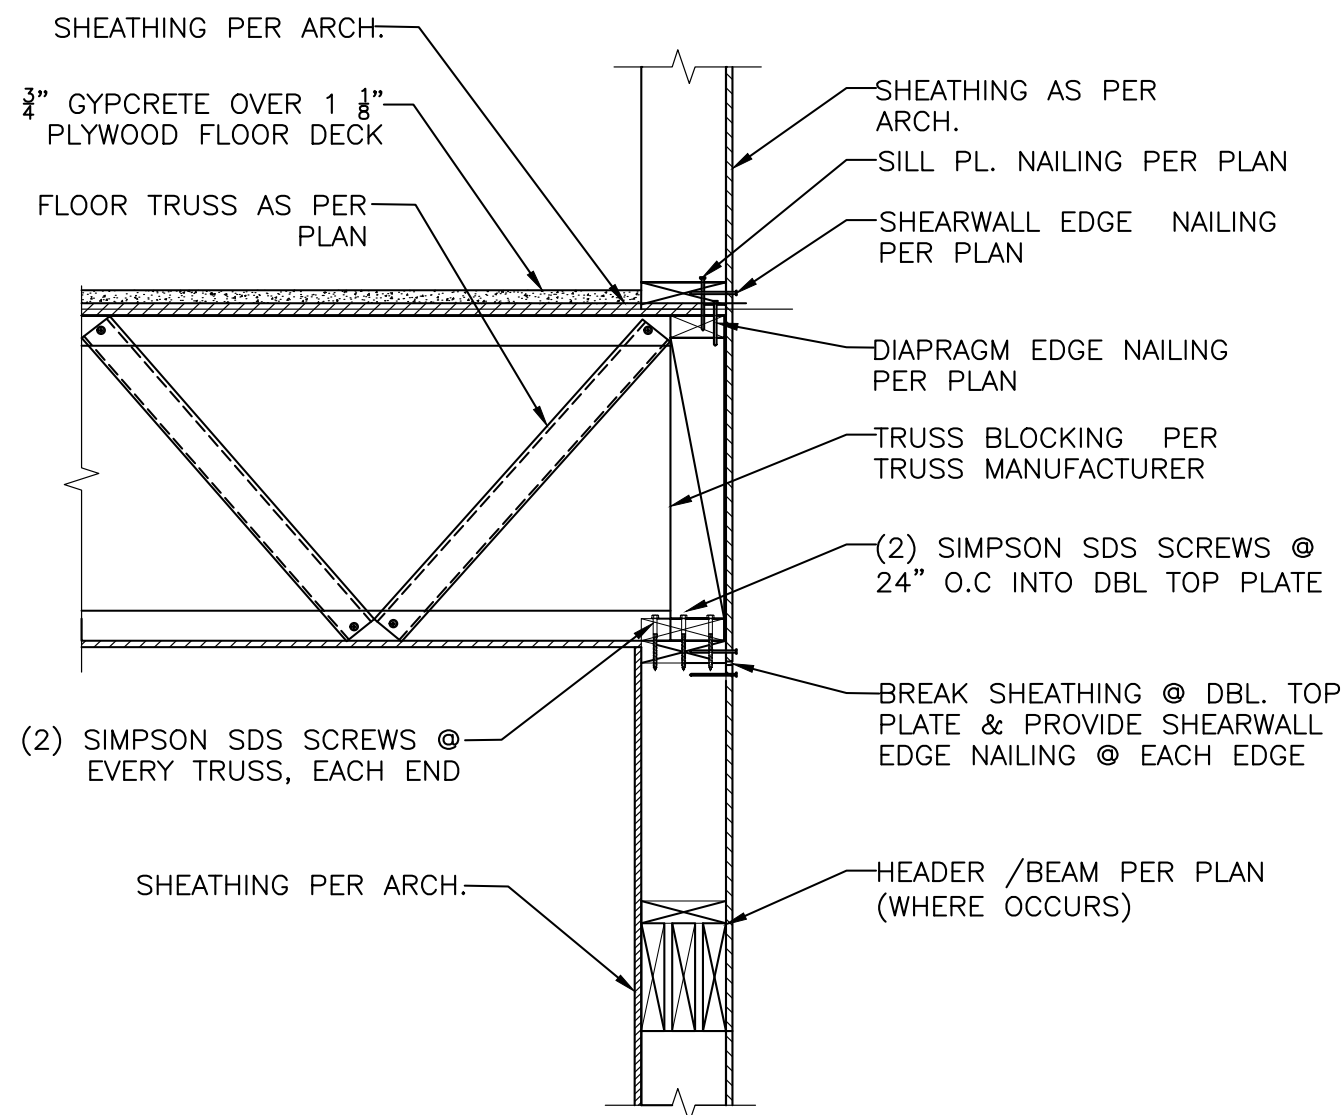


1 FLOOR FRAMING PERPENDICULAR
SCALE: NTS

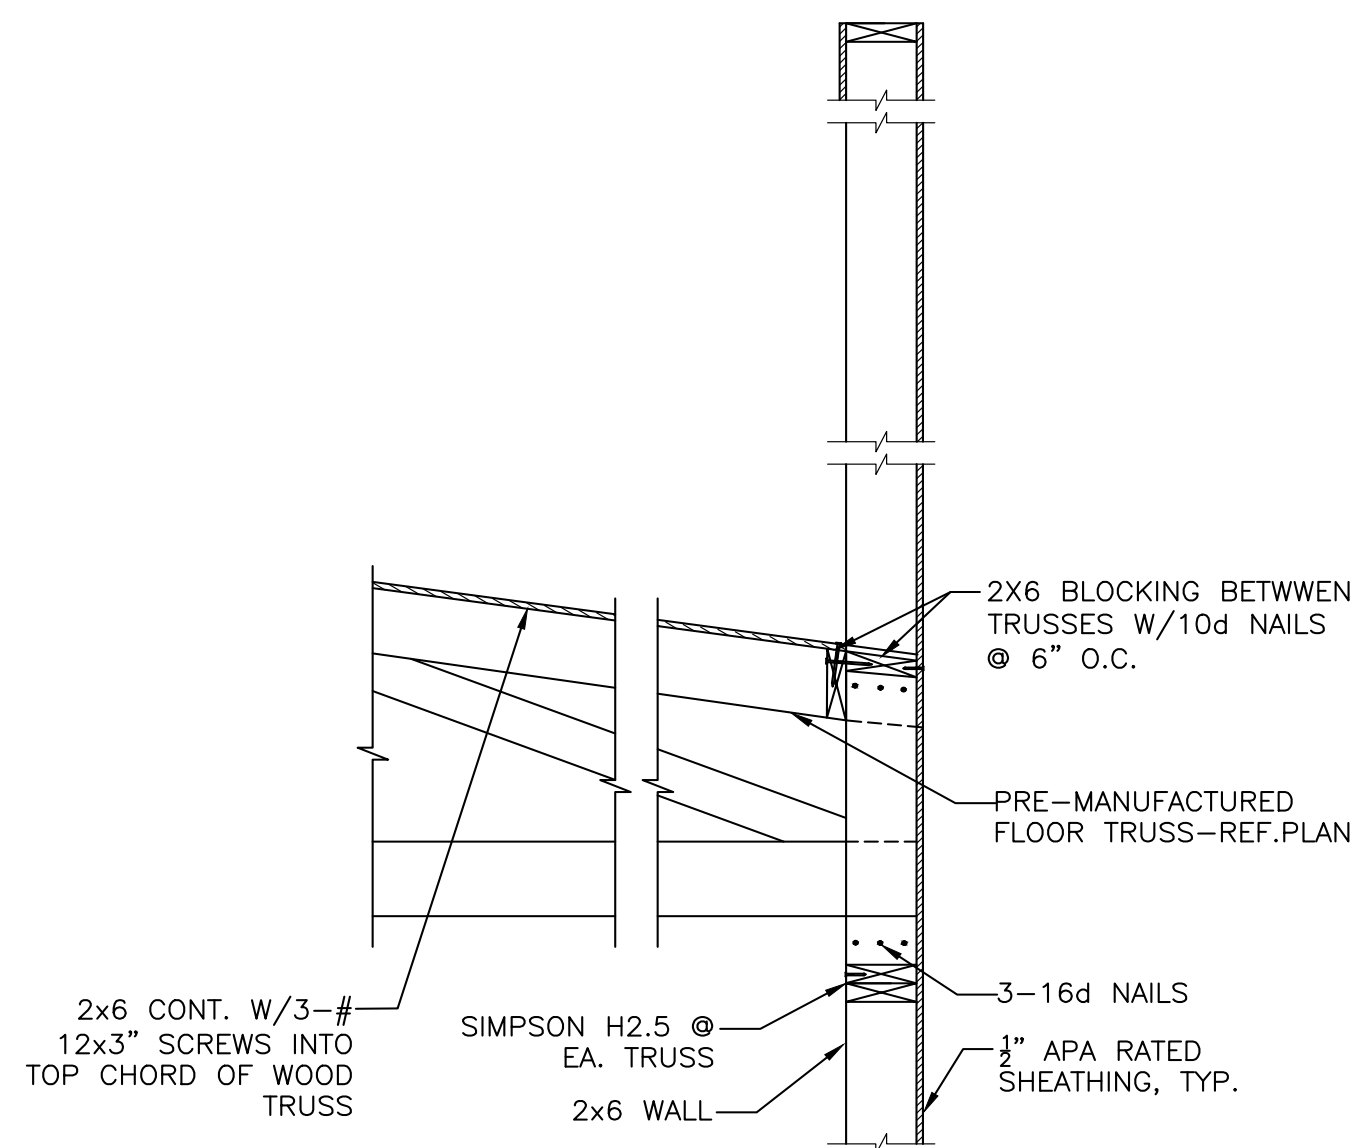


2 FRAMING SECTION @ ROOF
SCALE: NTS

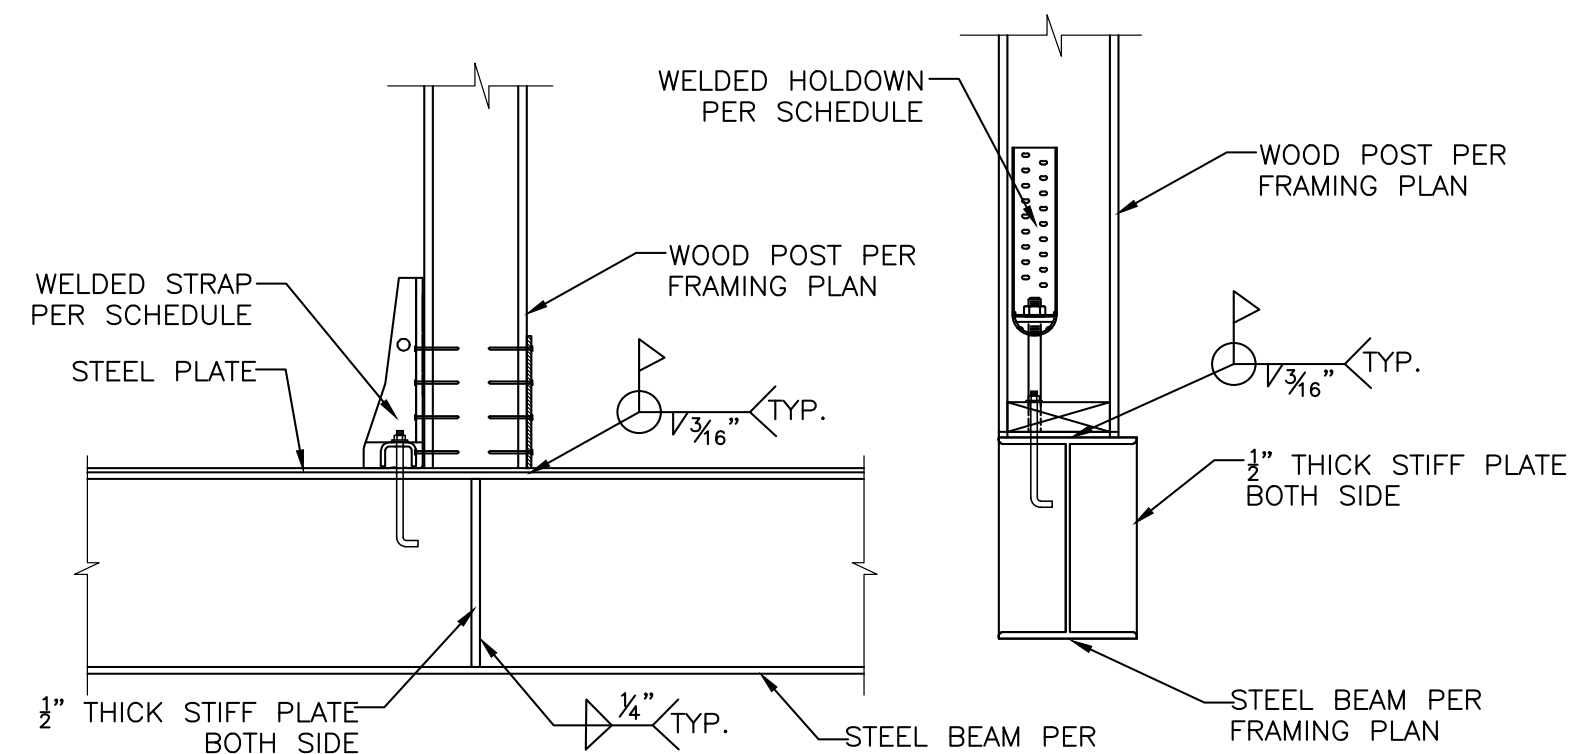


3 HOLD-DOWN POST @ STEEL BEAM CONNECTION
SCALE: NTS

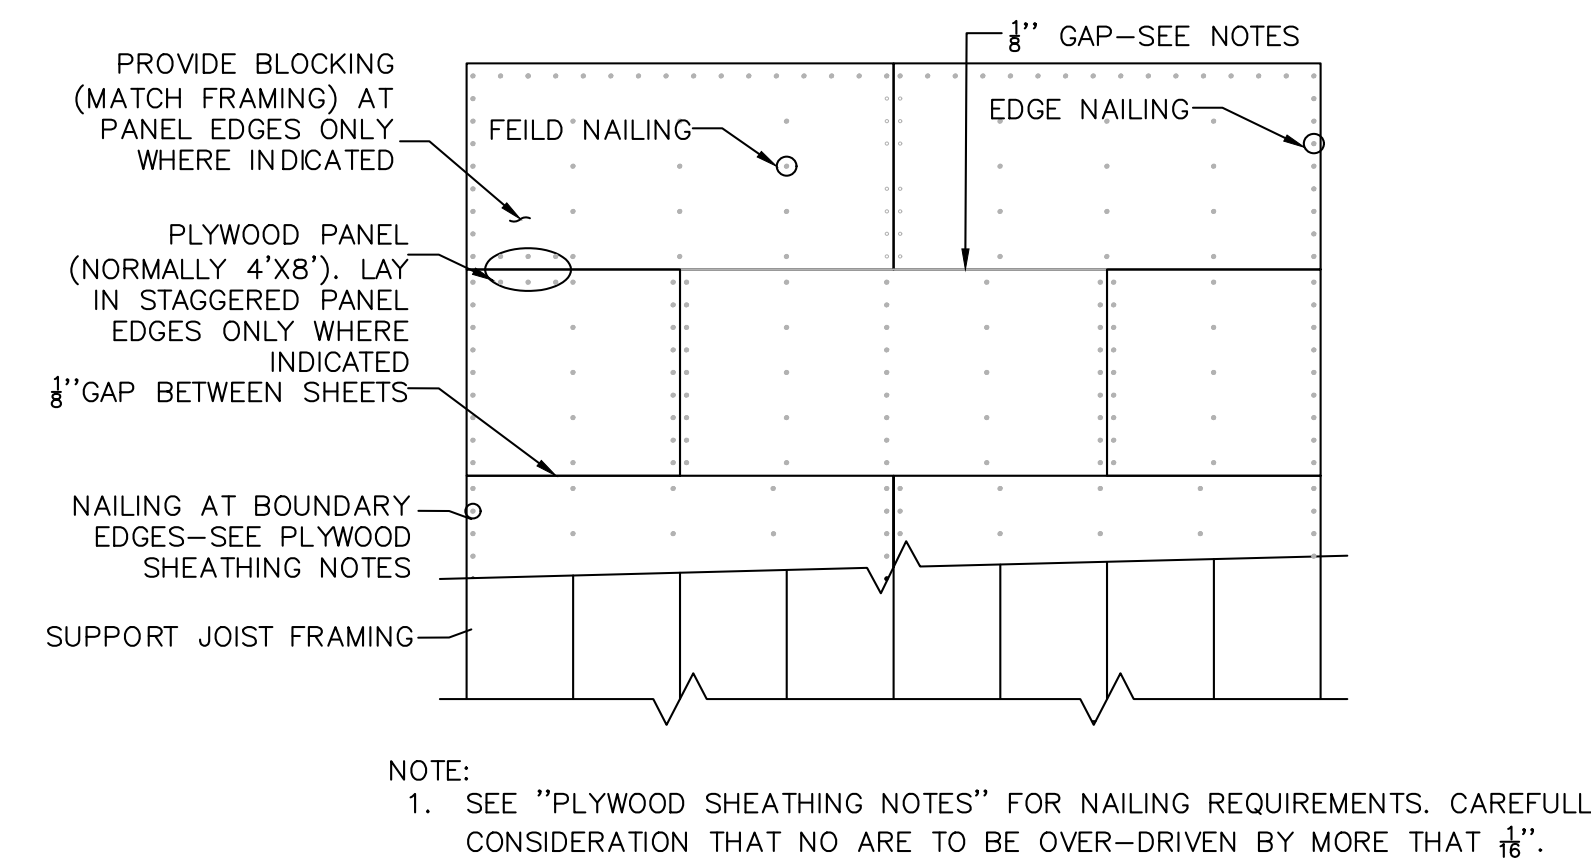


4 TYPICAL ROOF/ FLOOR DIAPHRAGM DETAIL
SCALE: NTS

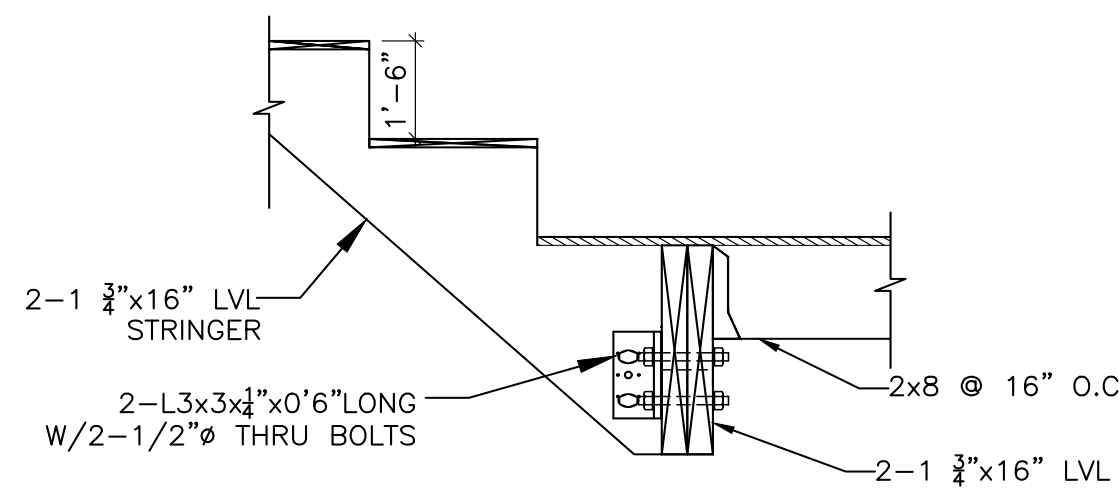


5 STAIR SECTION
SCALE: NTS

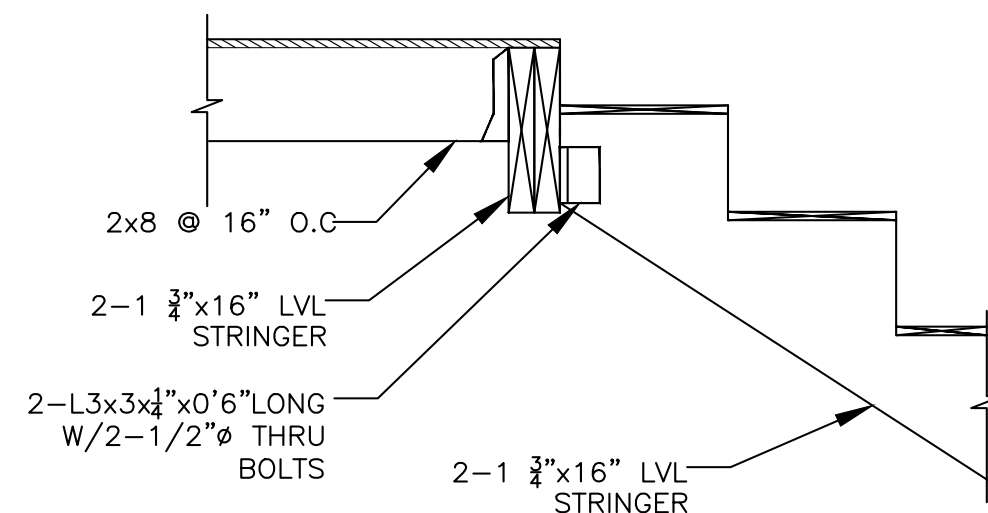


6 STAIR SECTION
SCALE: N.T.S

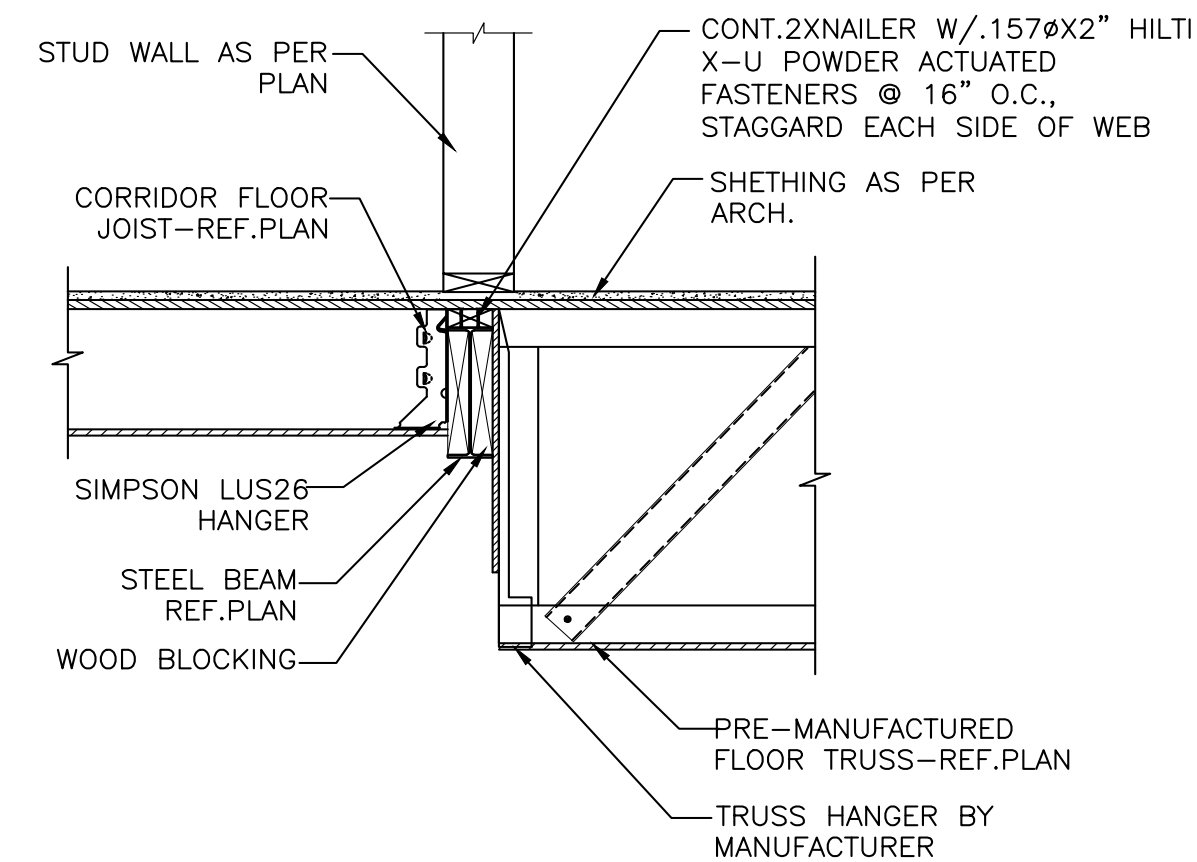


7 JOIST HANGER DTEAIL @ STEEL BEAM
SCALE: NTS

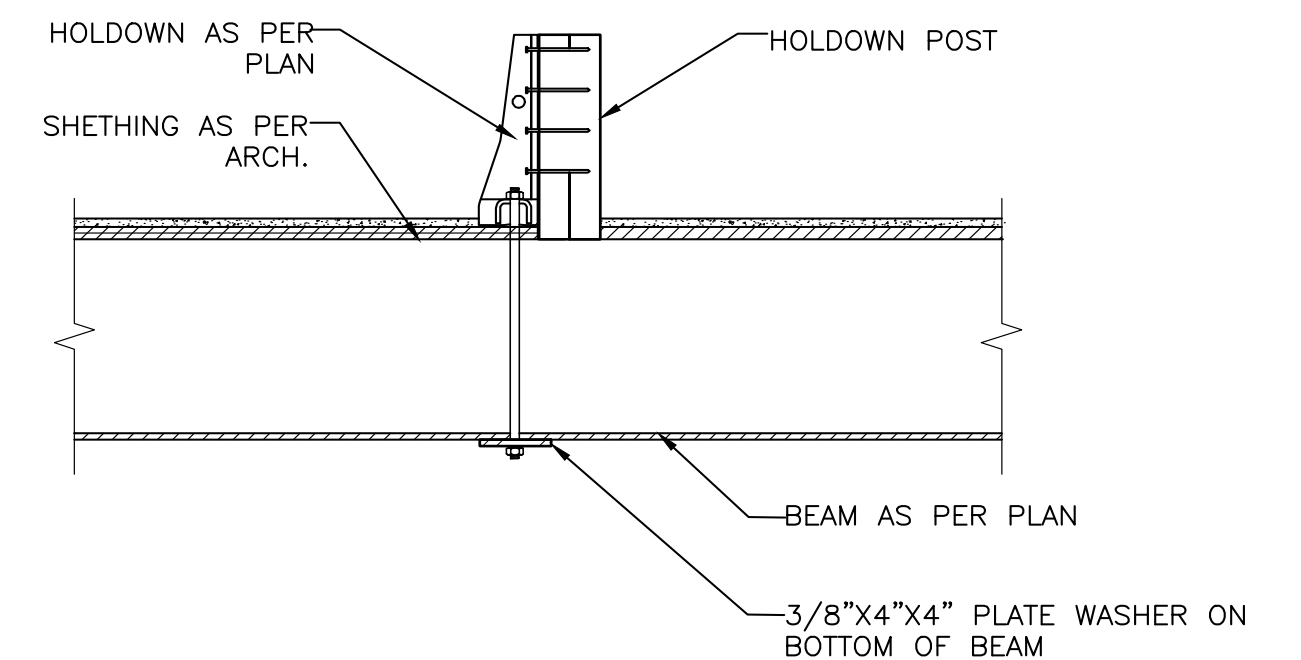

8 STRUCTURAL POST TO WOOD BEAM DETAIL
SCALE: NTS

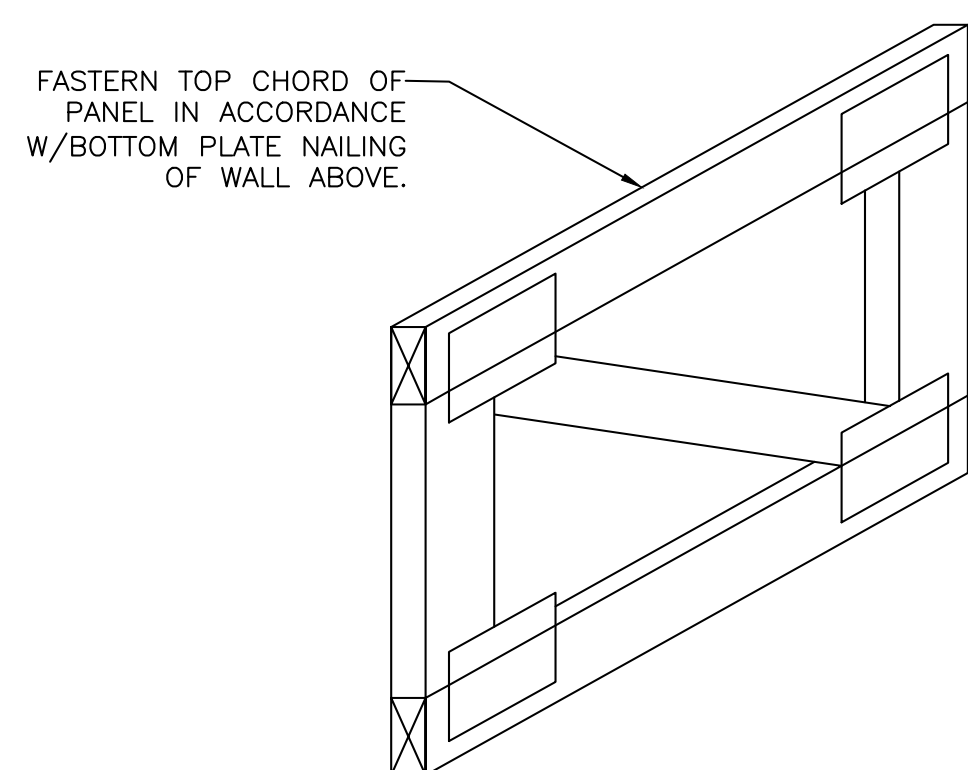

9 PREFAB TRUSS PANEL
SCALE: NTS

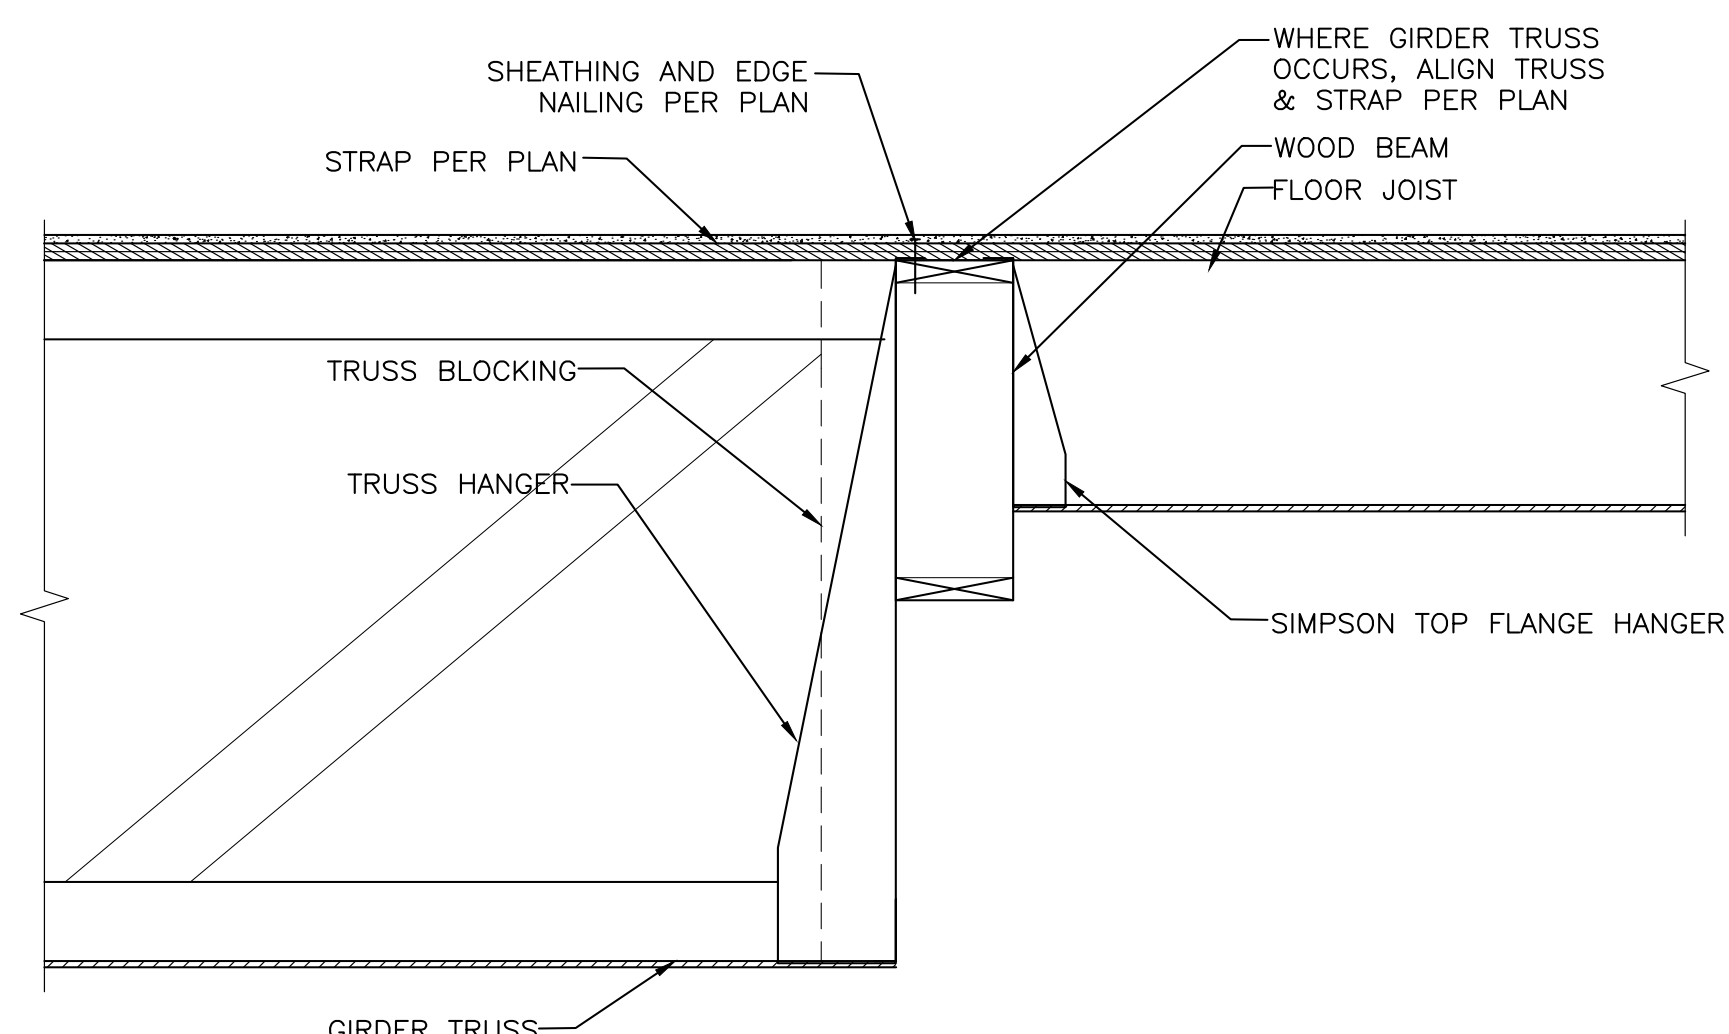

10 CORRIDOR FRAMING BEARING DETAIL
SCALE: NTS

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jhsanford@aol.com
COPYRIGHT 2006 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY

Residence Inn
BY MARRIOTT

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE & MEMORIAL, TULSA, OK






THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECT'S AND ENGINEER'S SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION.

No.	Description	Date

TULSA AIRPORT RIBM
61208
Project Number

SHEET
S145
DETAILS

6-08-2026
NOT VALID FOR CONSTRUCTION UNLESS SIGNED IN THIS BLOCK

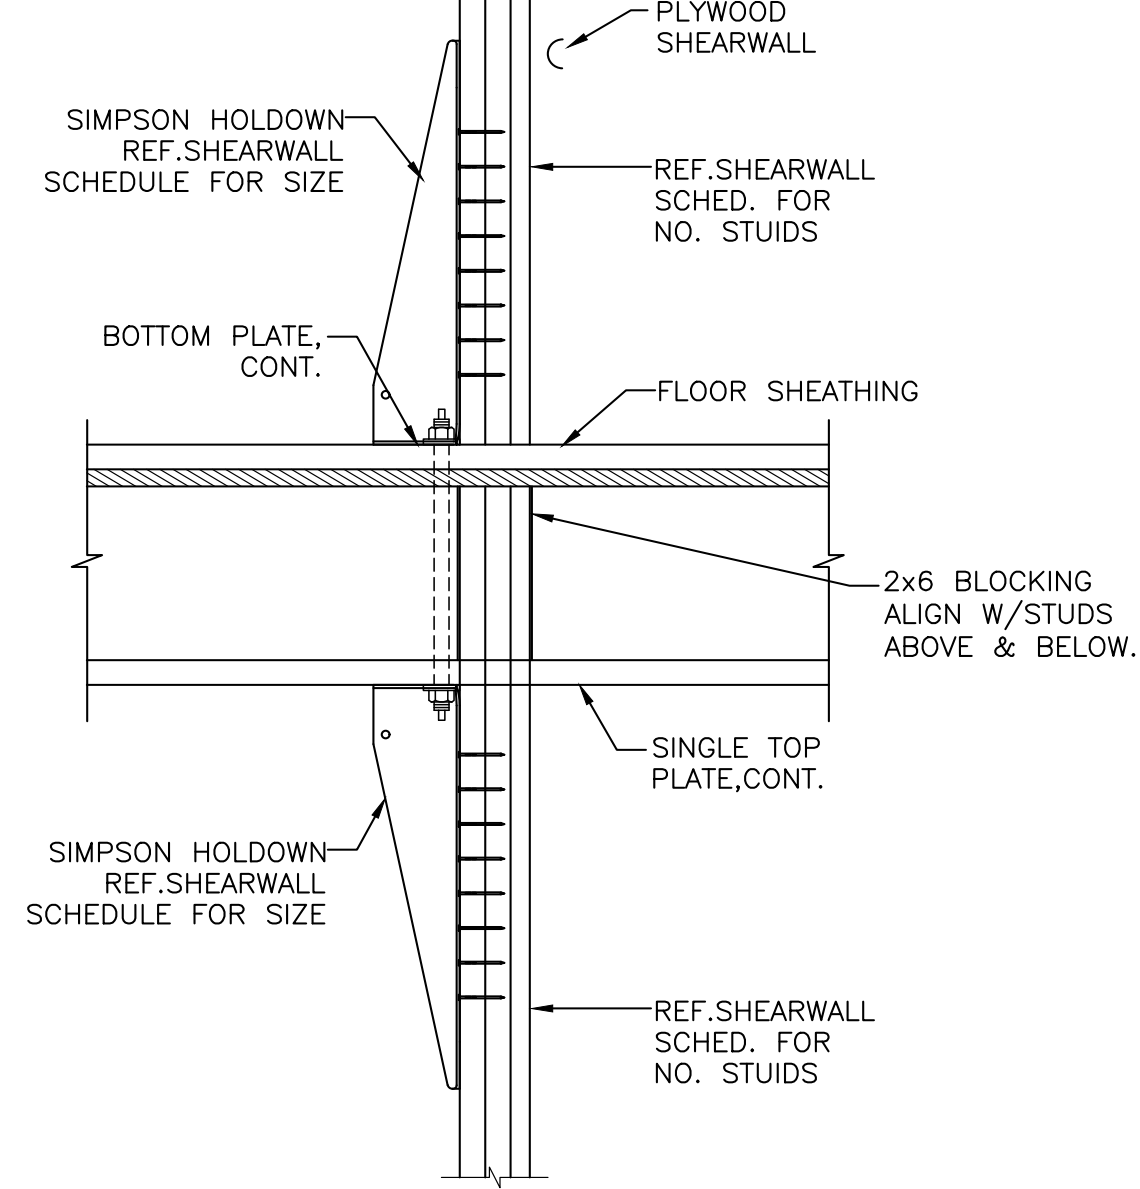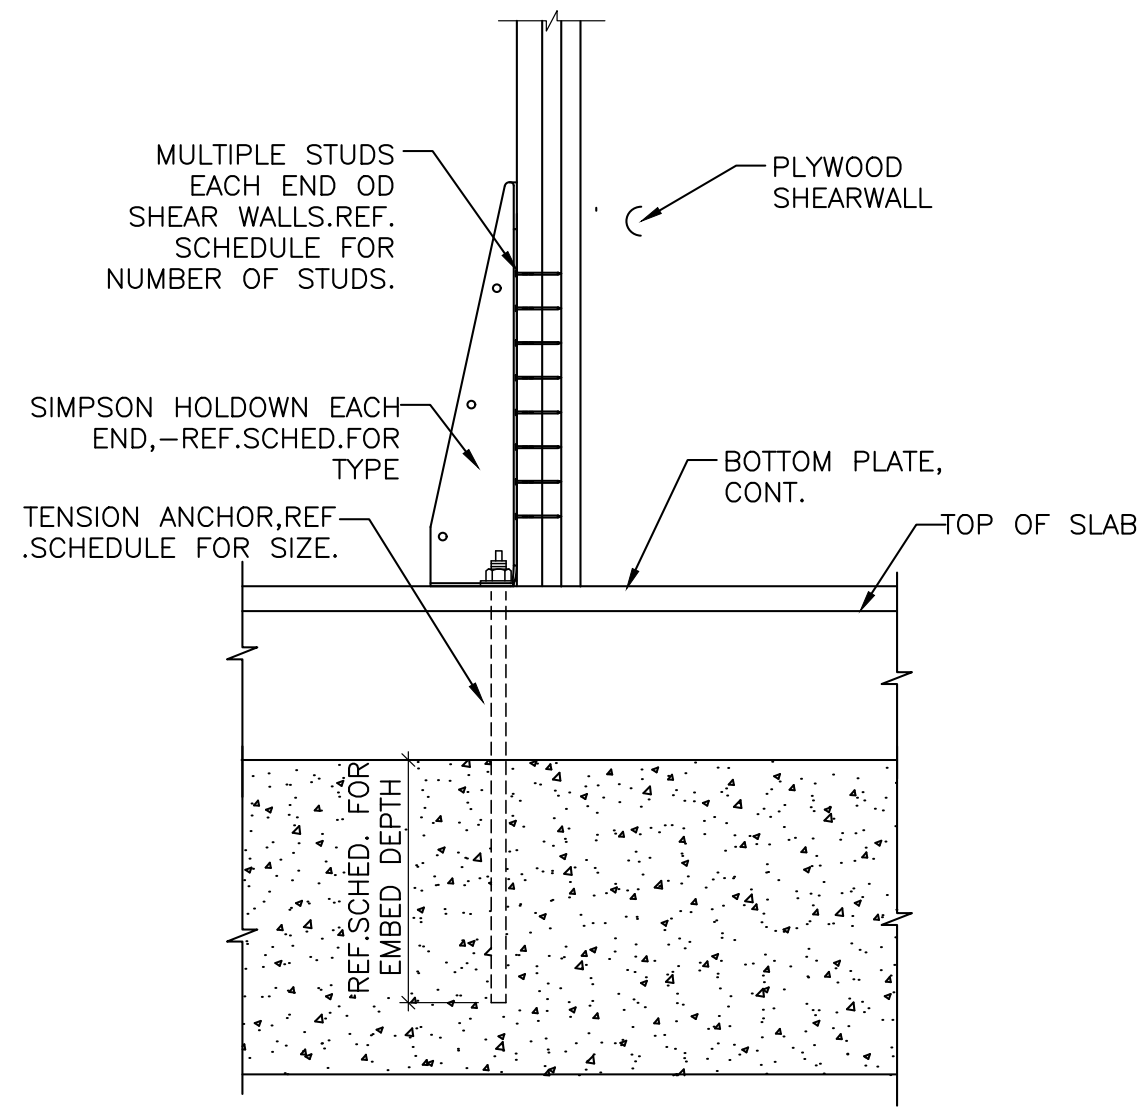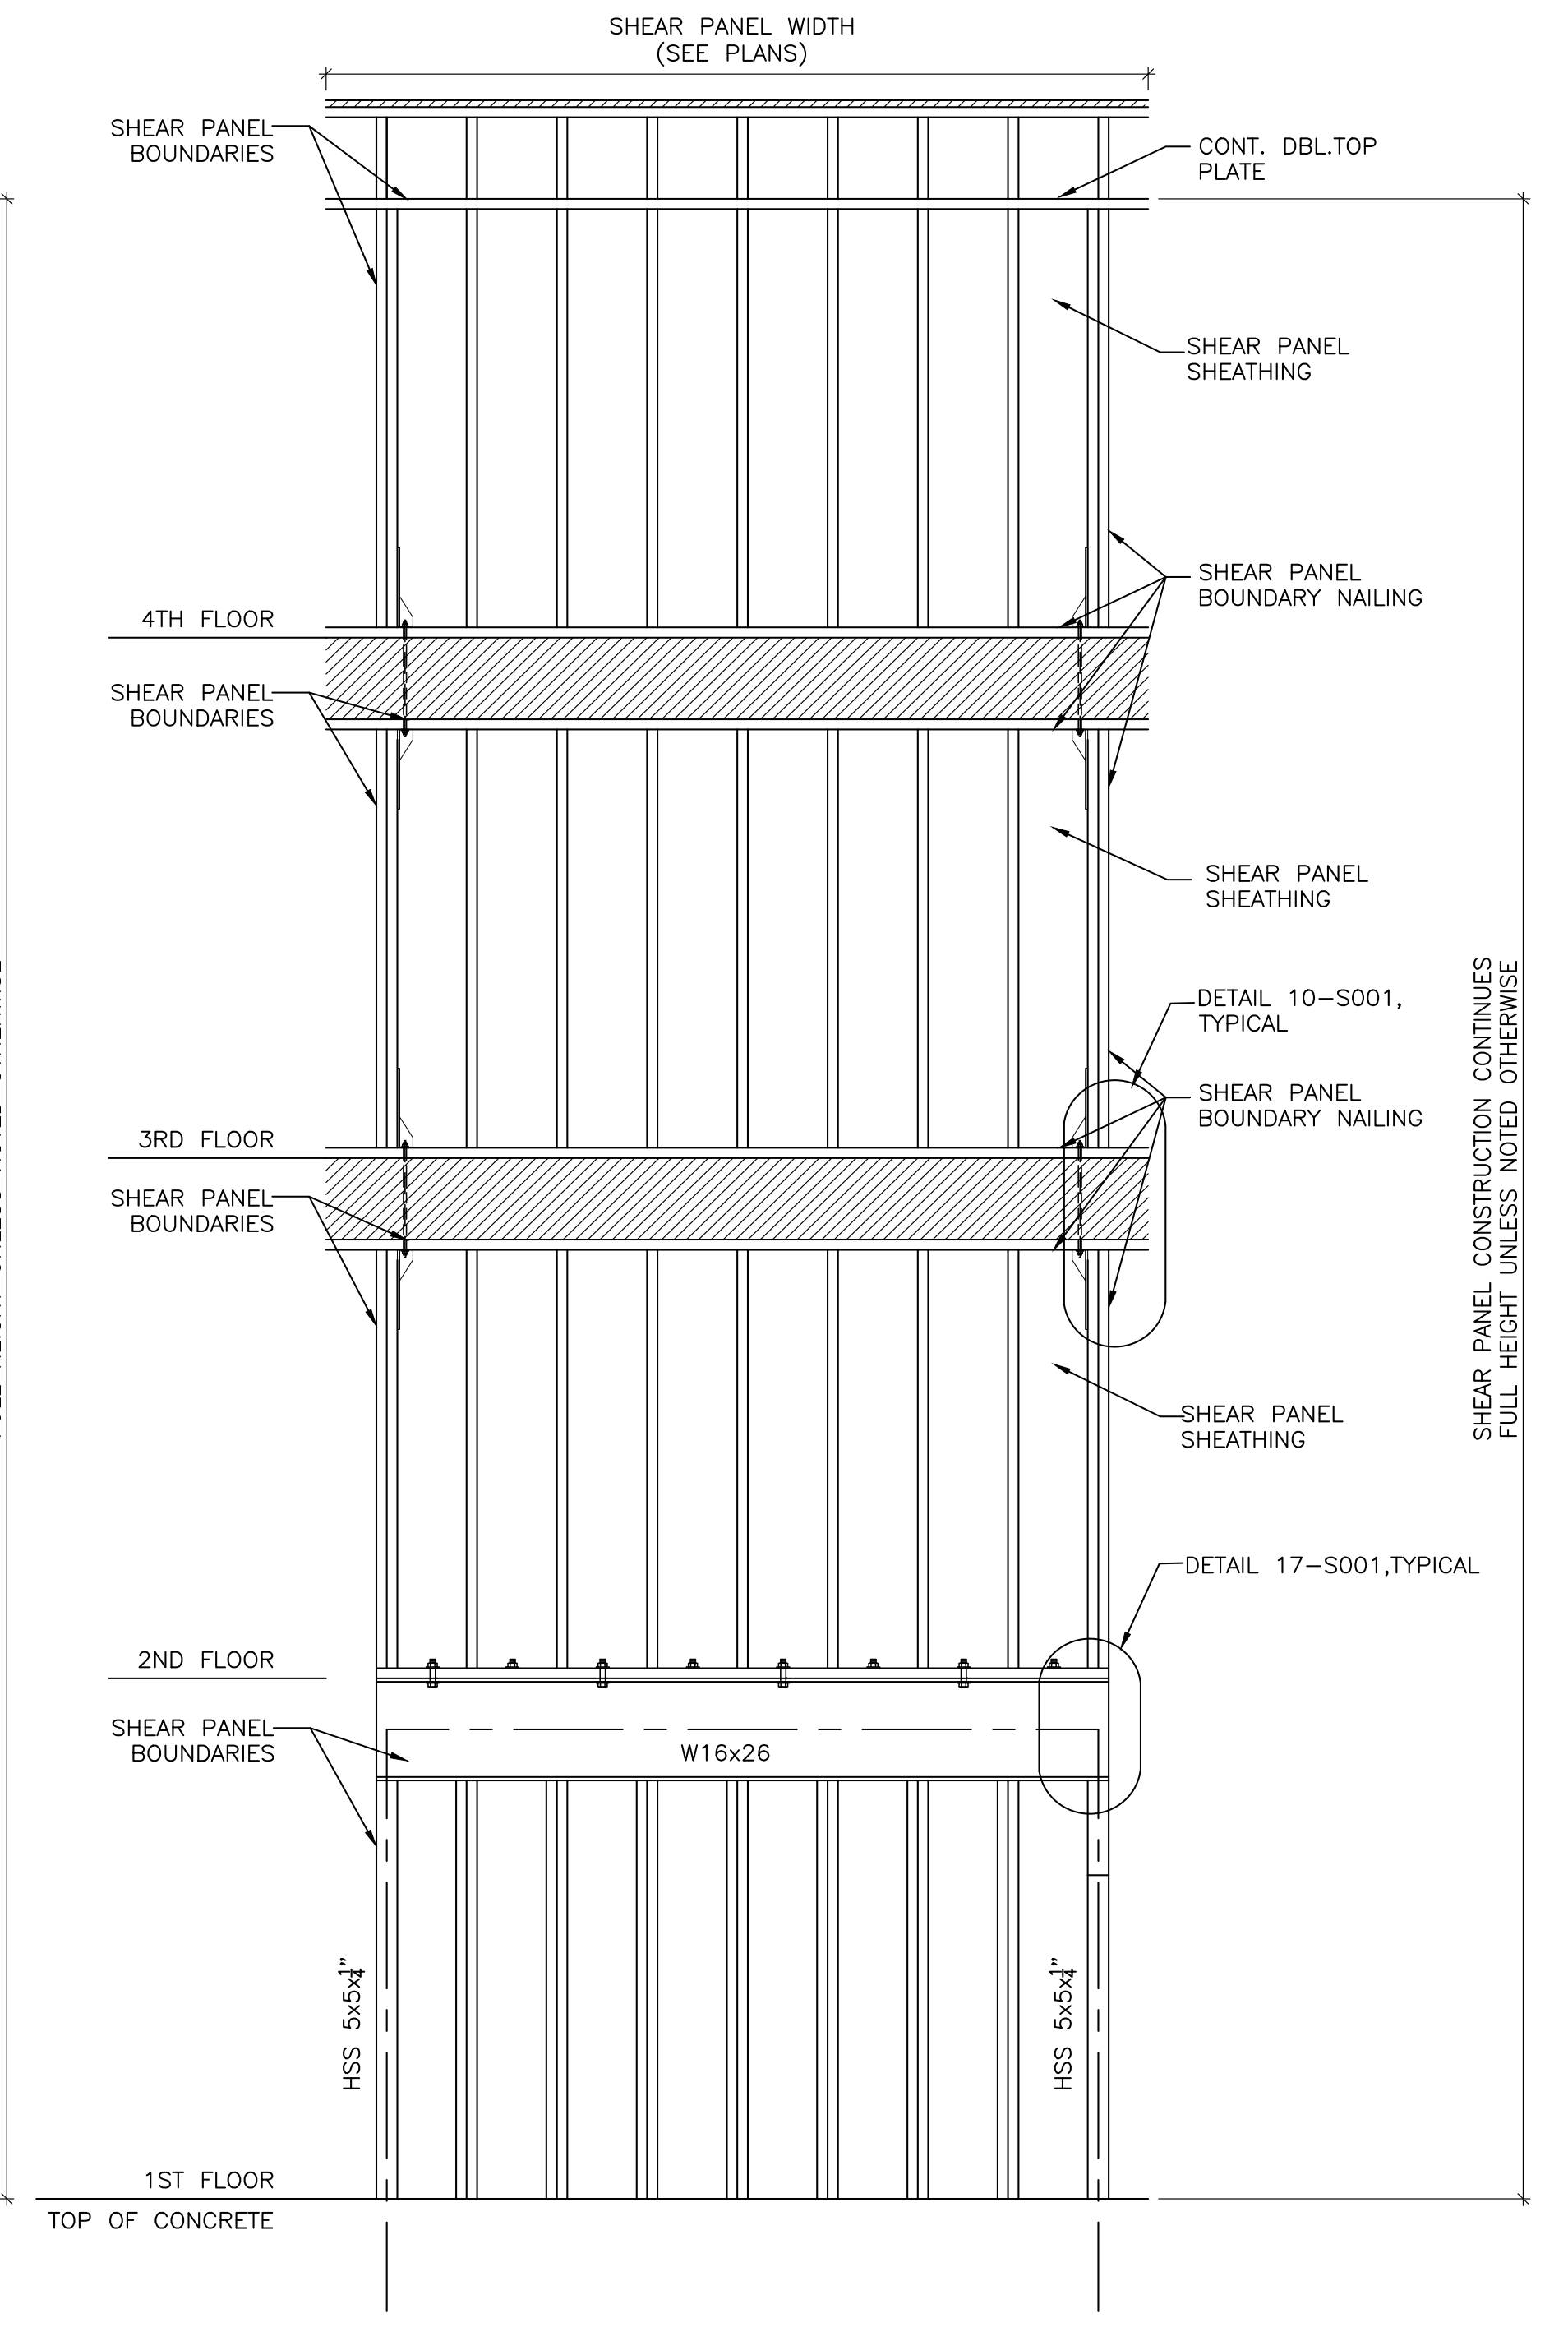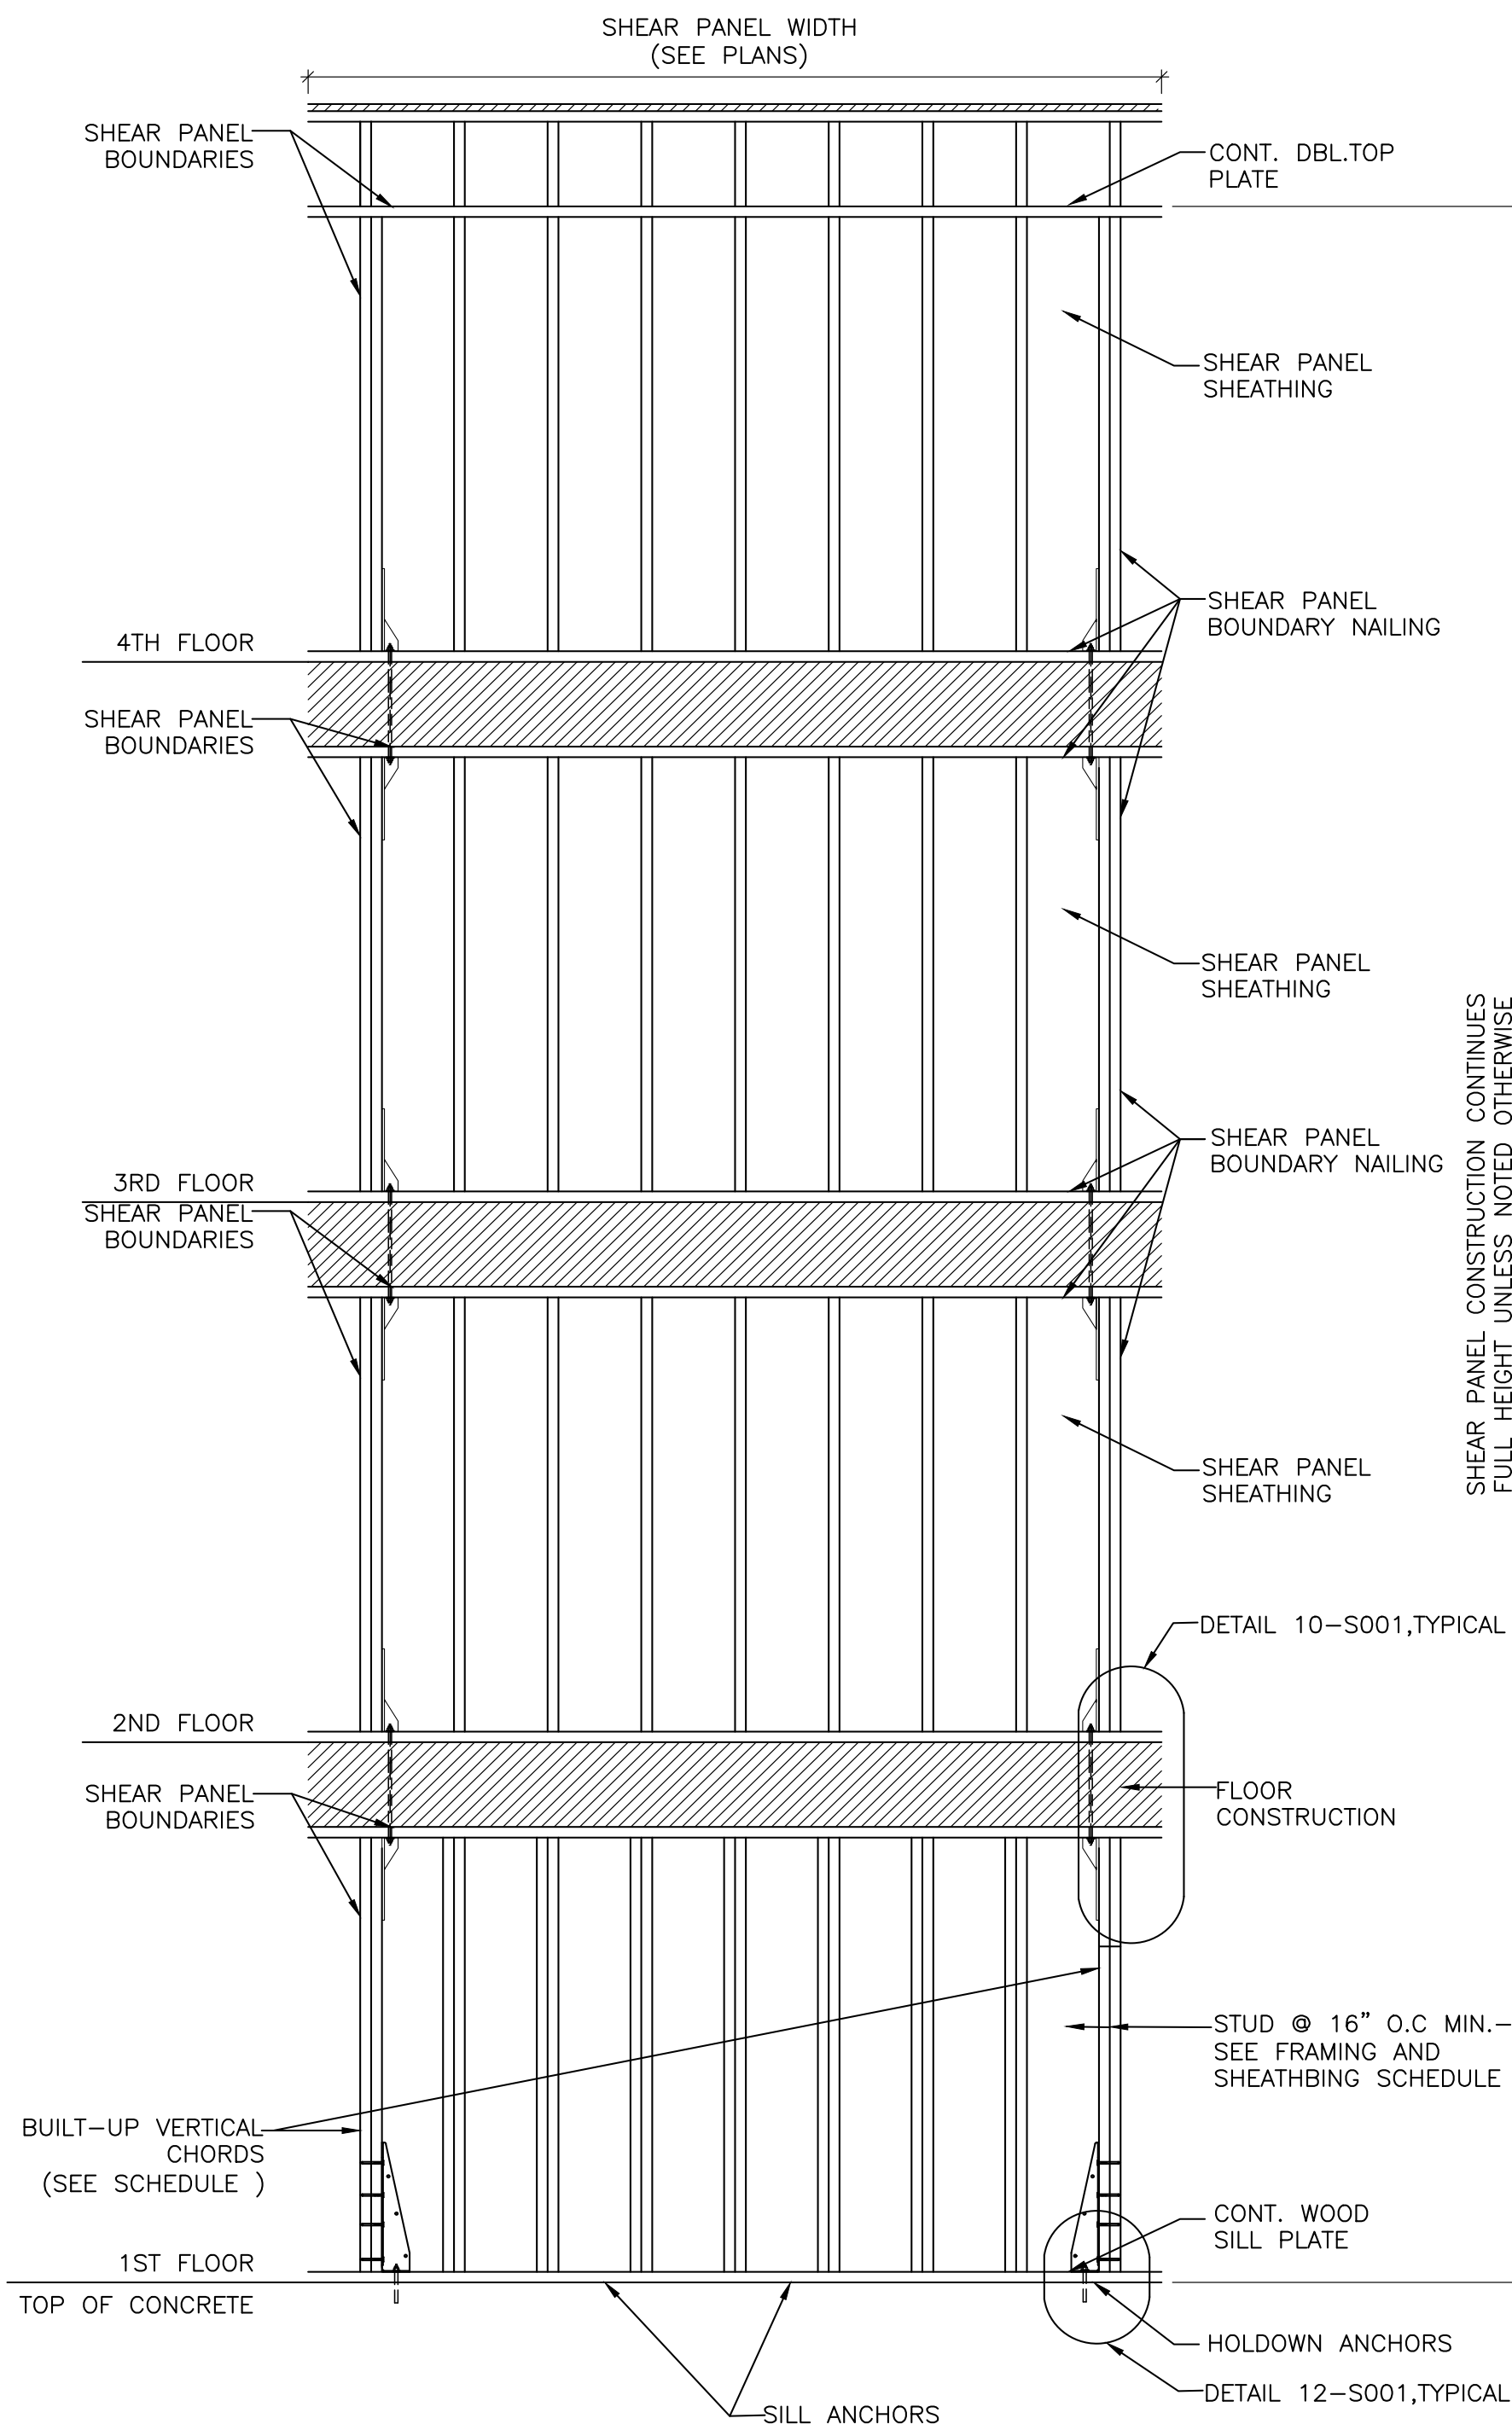
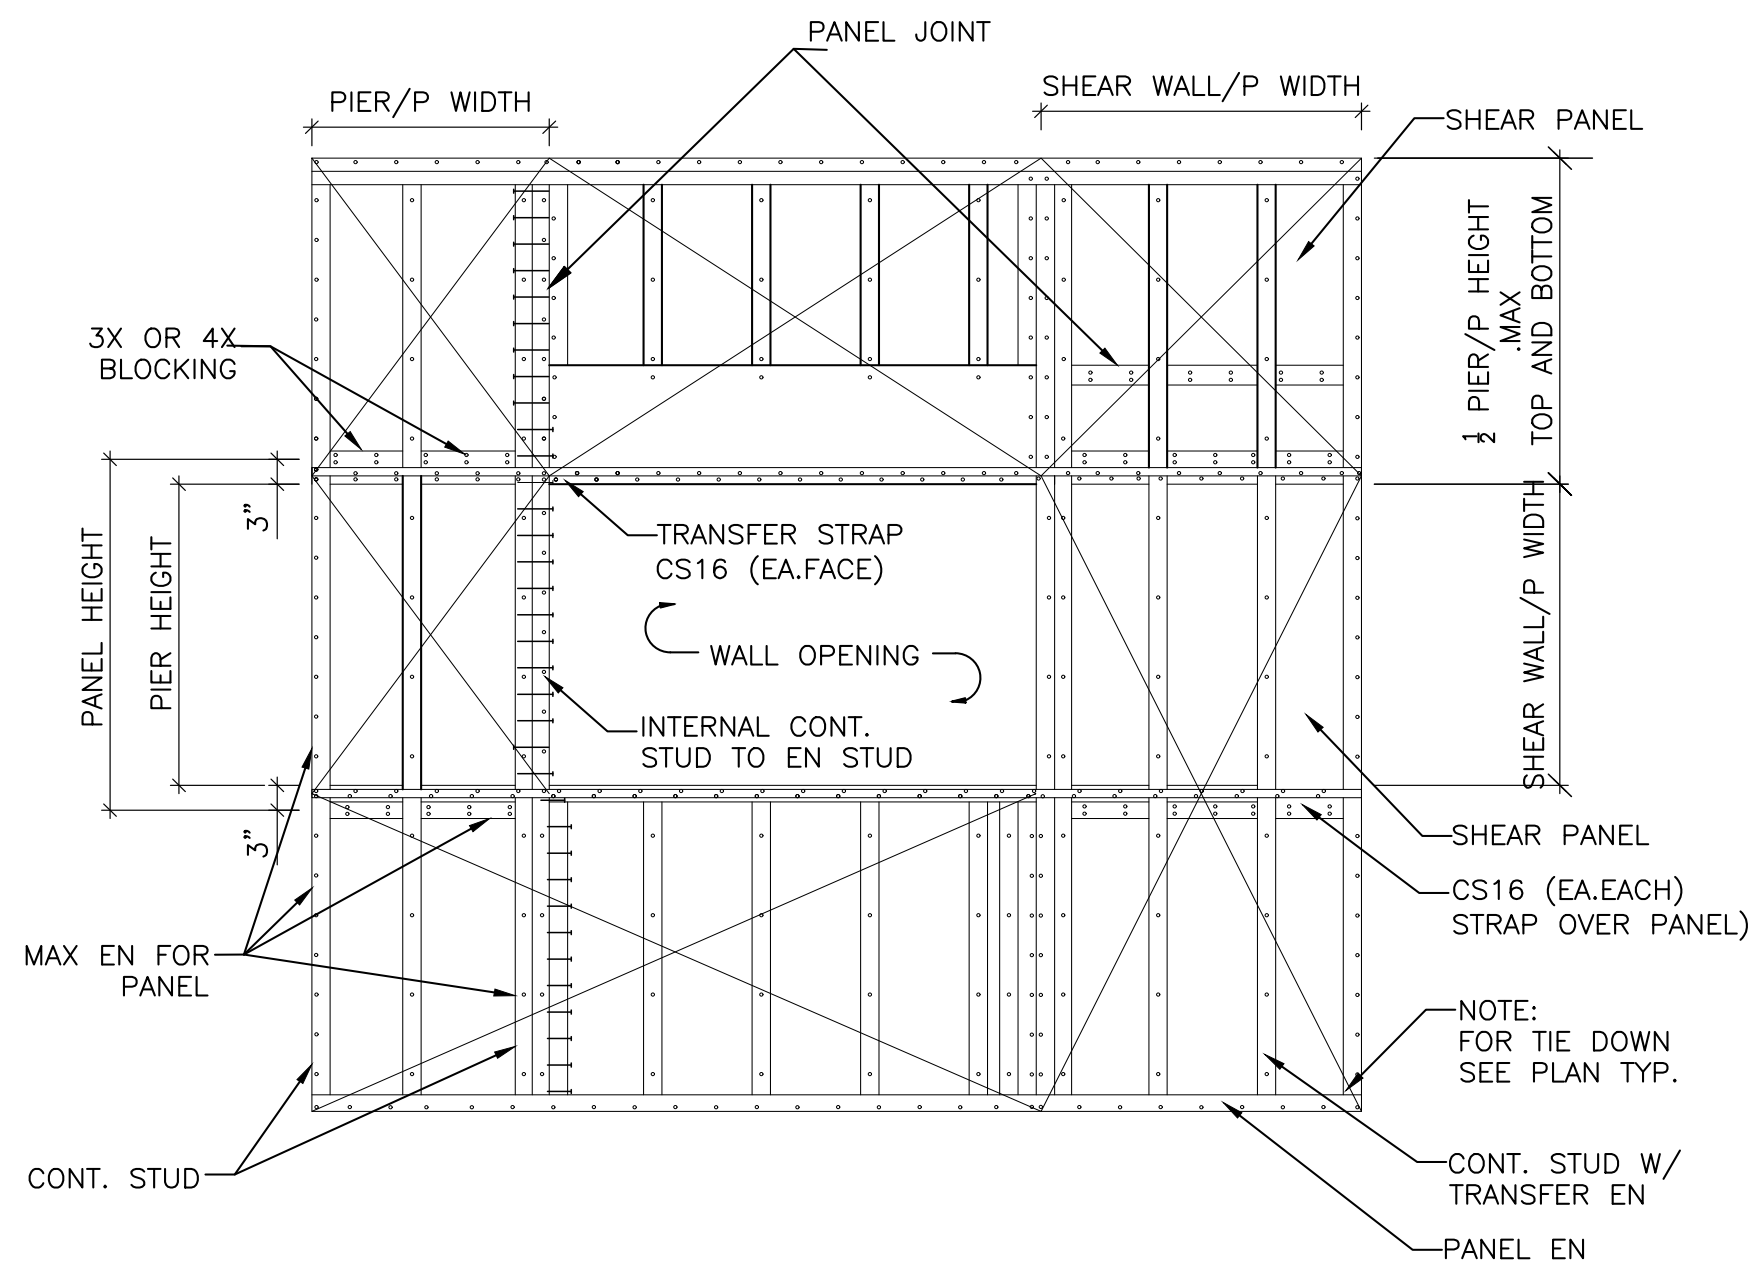


4 SHEARWALL HOLDOWN
SCALE: NTS

5 SHEARWALL HOLDOWN
SCALE: NTS

2 INTERIOR WOOD FRAME SHEAR PANEL ELEVATION
SCALE: NTS

3 INTERIOR FRAME SHEAR PANEL ELEVATION
SCALE: NTS

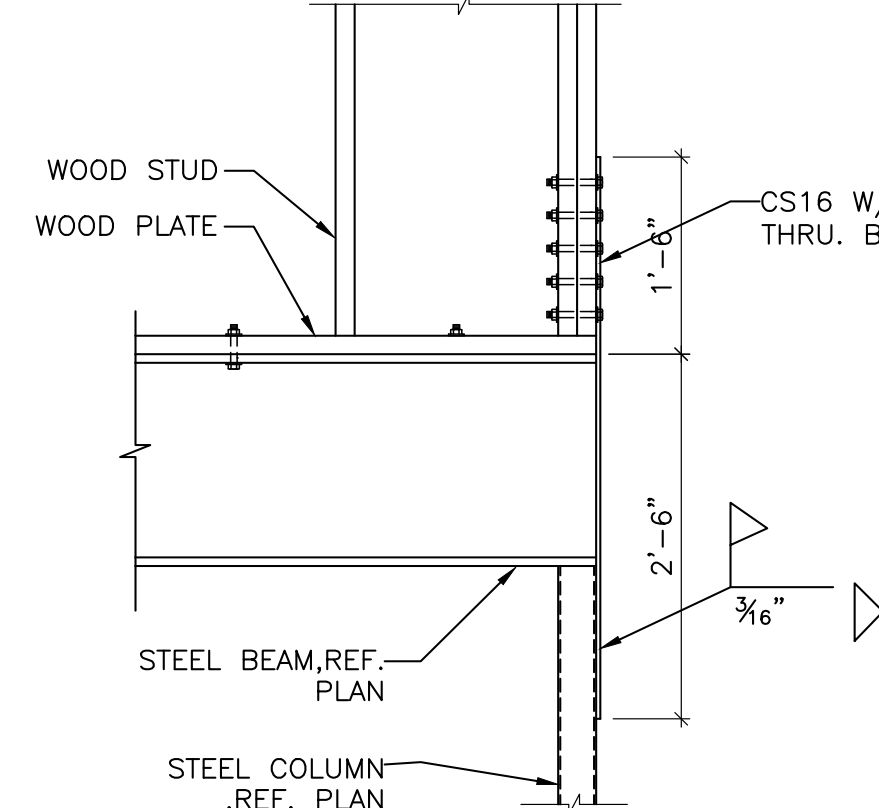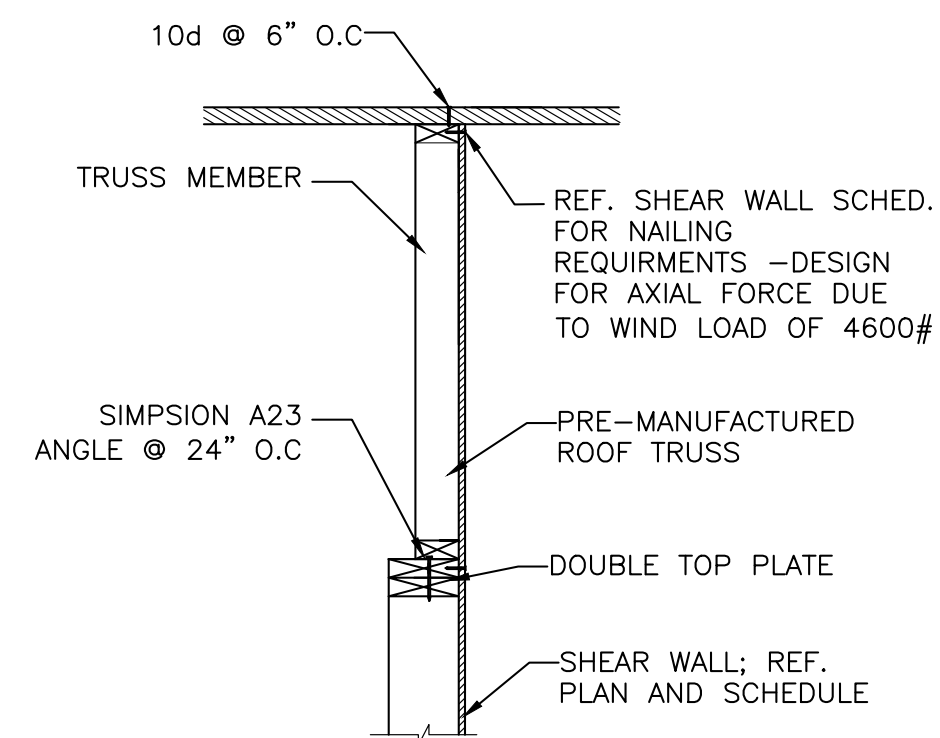

6 PARALLEL TRUSS TO SHEAR WALL DETAIL
SCALE: NTS

7 STEEL BEAM TO STRUCTURAL DETAIL
SCALE: NTS

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jsmainford@aol.com
COPYRIGHT 2006 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY

Residence Inn
BY MARRIOTT

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE & MEMORIAL, TULSA, OK


THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECT'S AND ENGINEER'S SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION.

TULSA AIRPORT RIBM 61208
Project Number


6-08-2026

NOT VALID FOR CONSTRUCTION UNLESS SIGNED IN THIS BLOCK


SHEET
S146
DETAILS

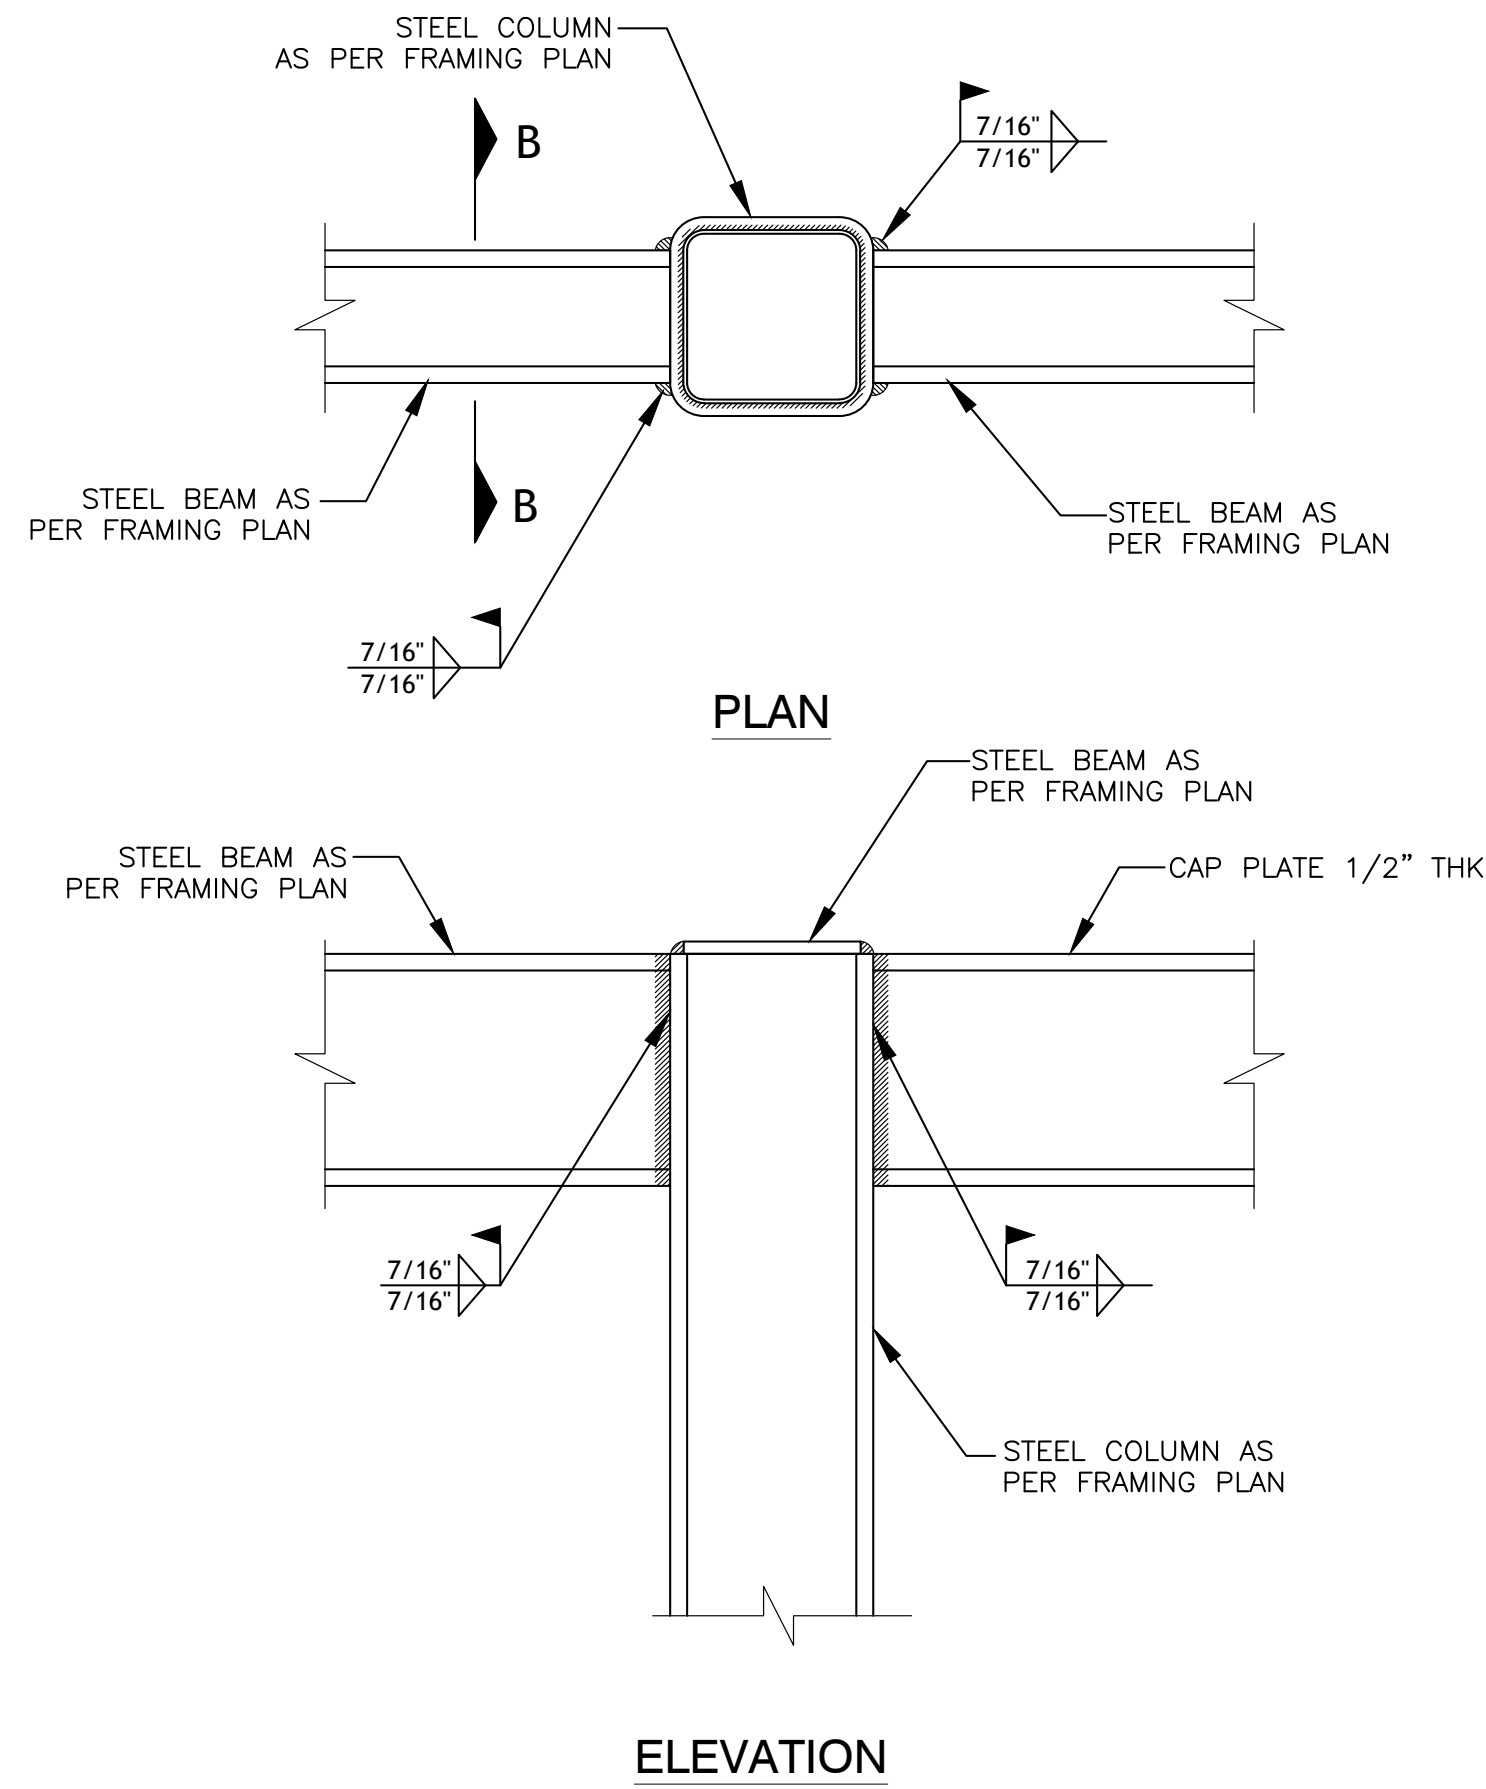


1 HSS STEEL COLUMN TO HSS STEEL BEAM CONNECTION DETAIL
SCALE: NTS

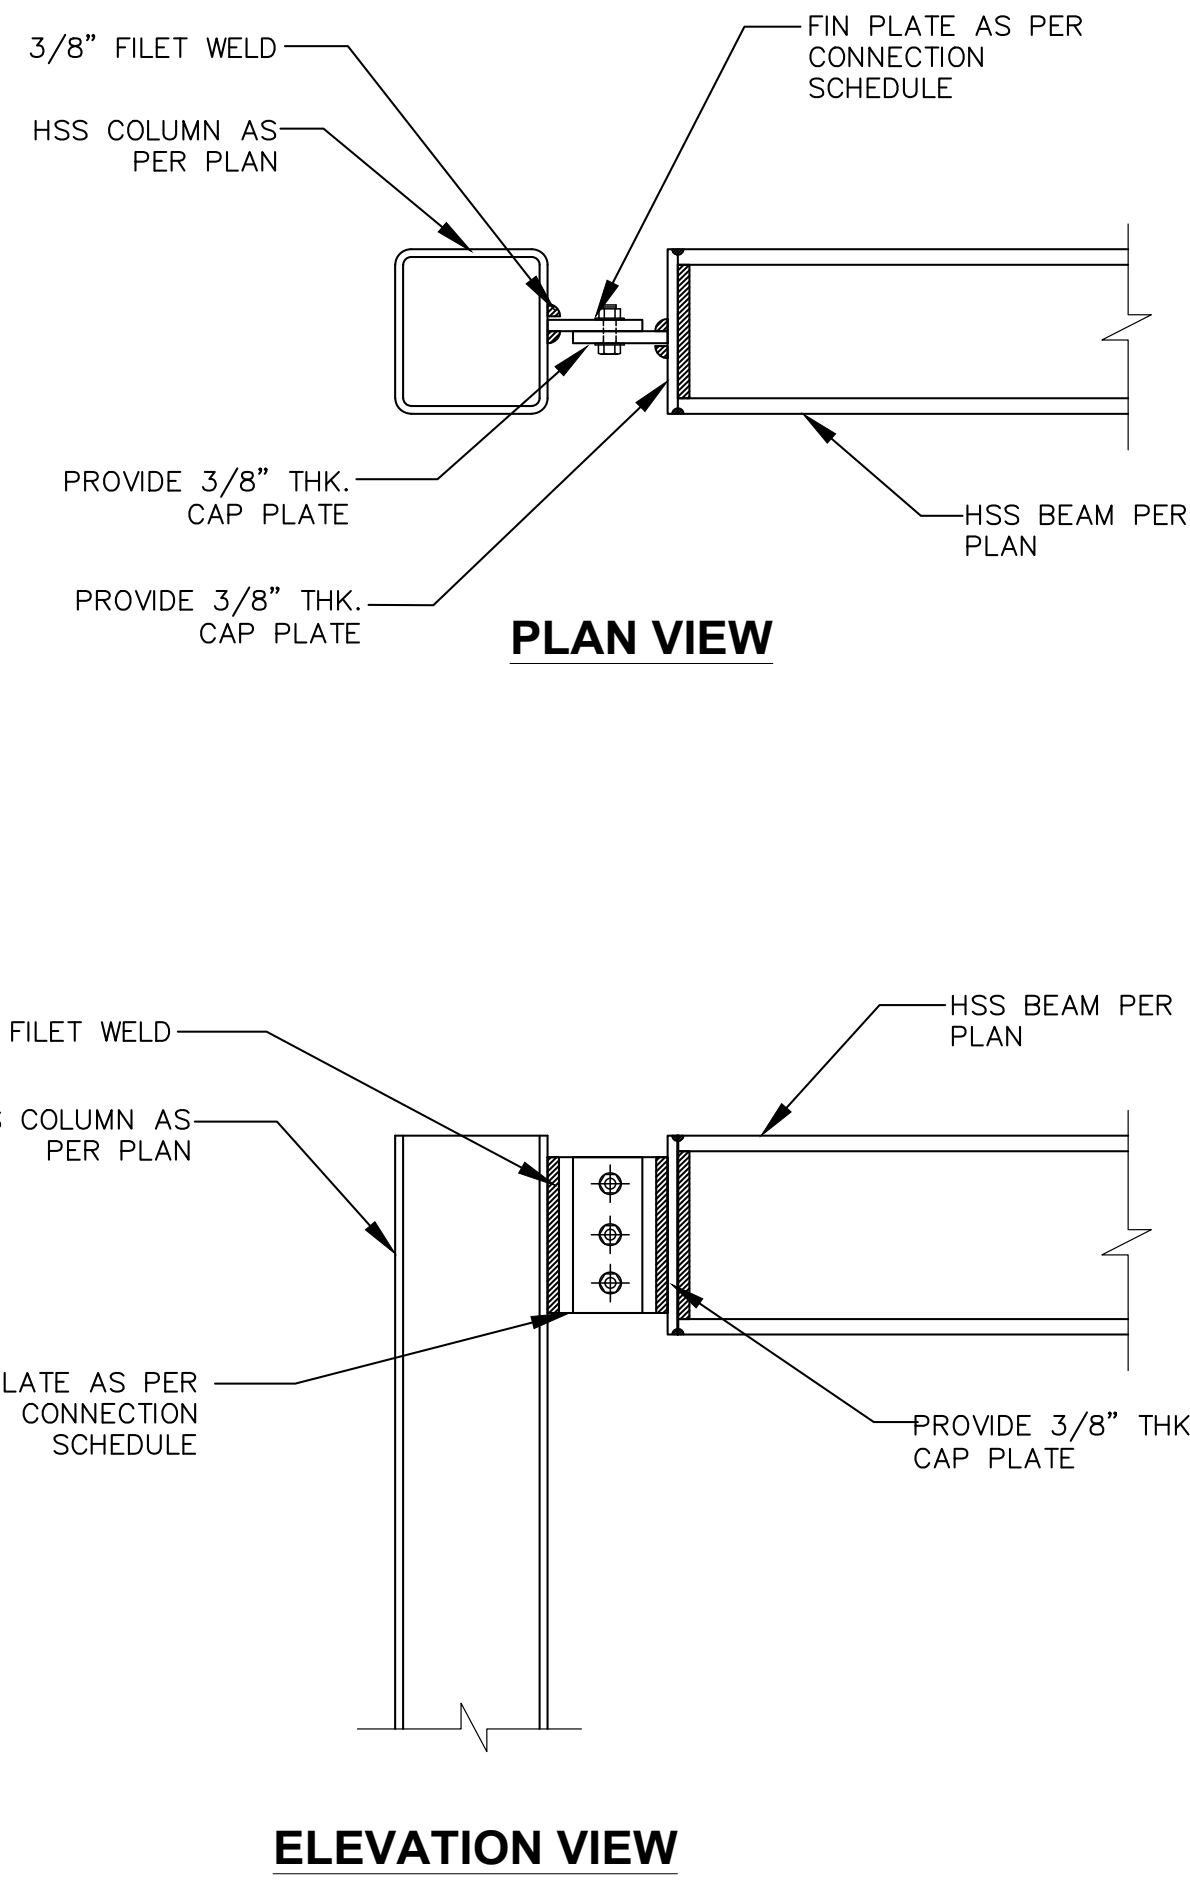


2 HSS COLUMN CONNECTION WITH HSS BEAM DETAIL
SCALE: NTS

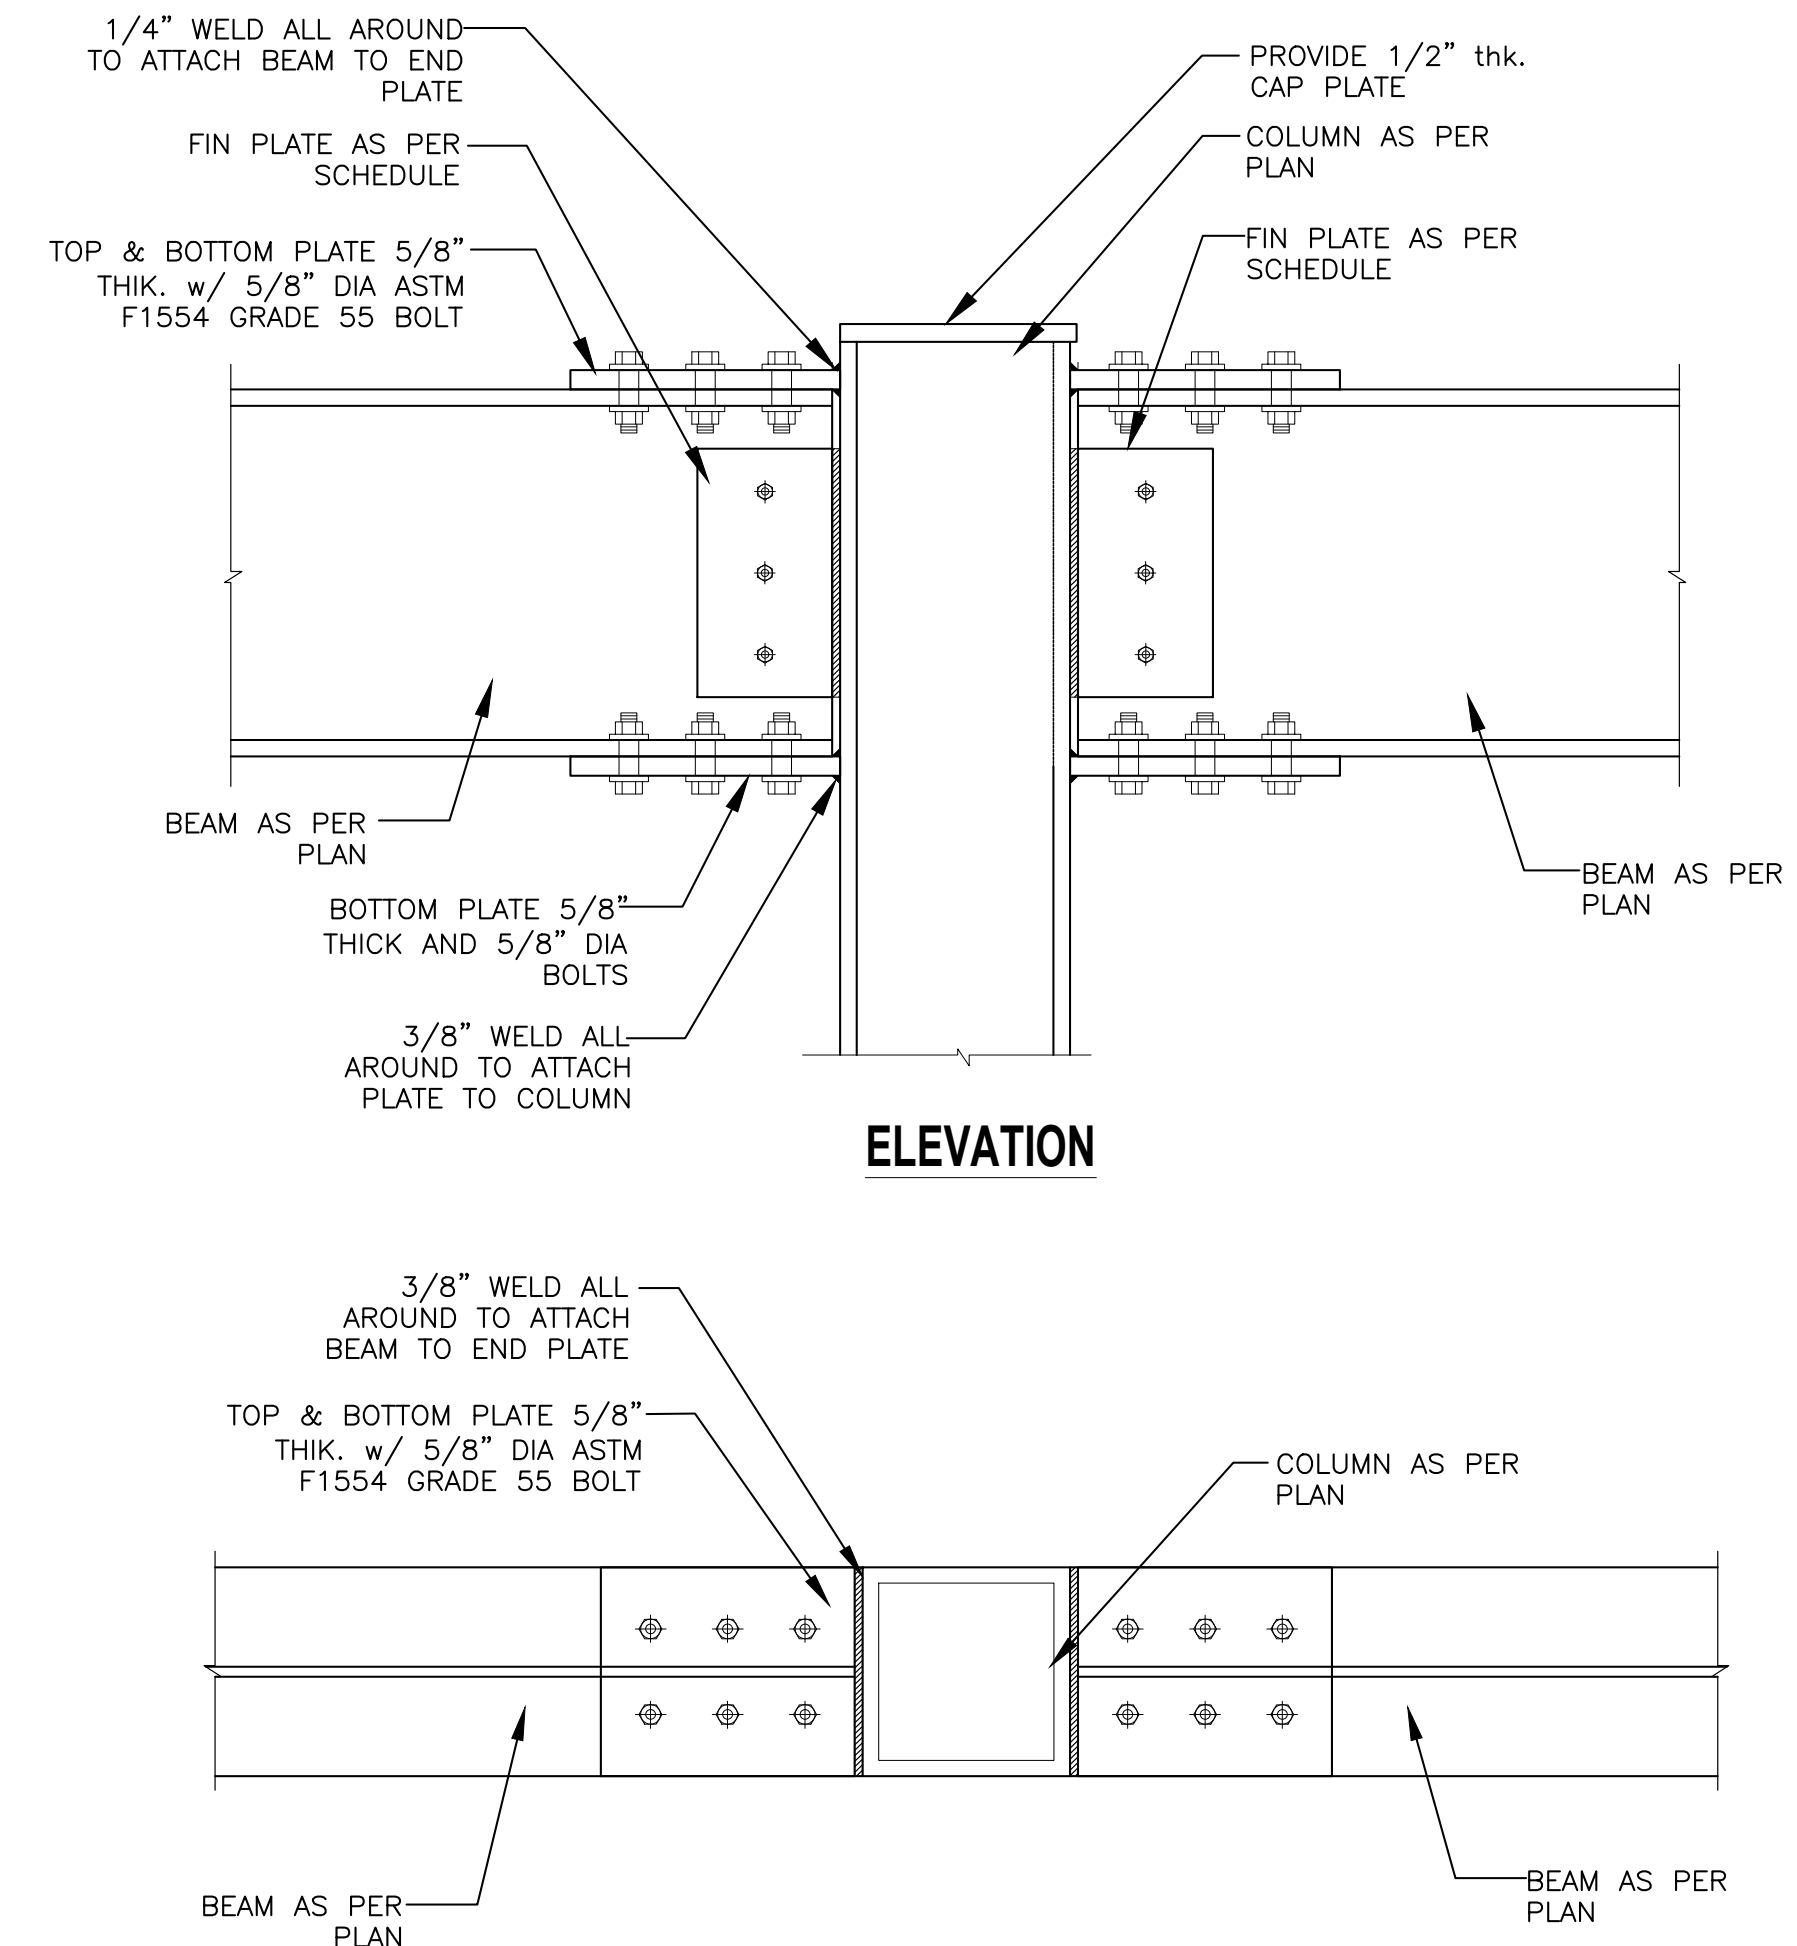

3 INTERIOR FRAME SHEAR PANEL ELEVATION
SCALE: NTS

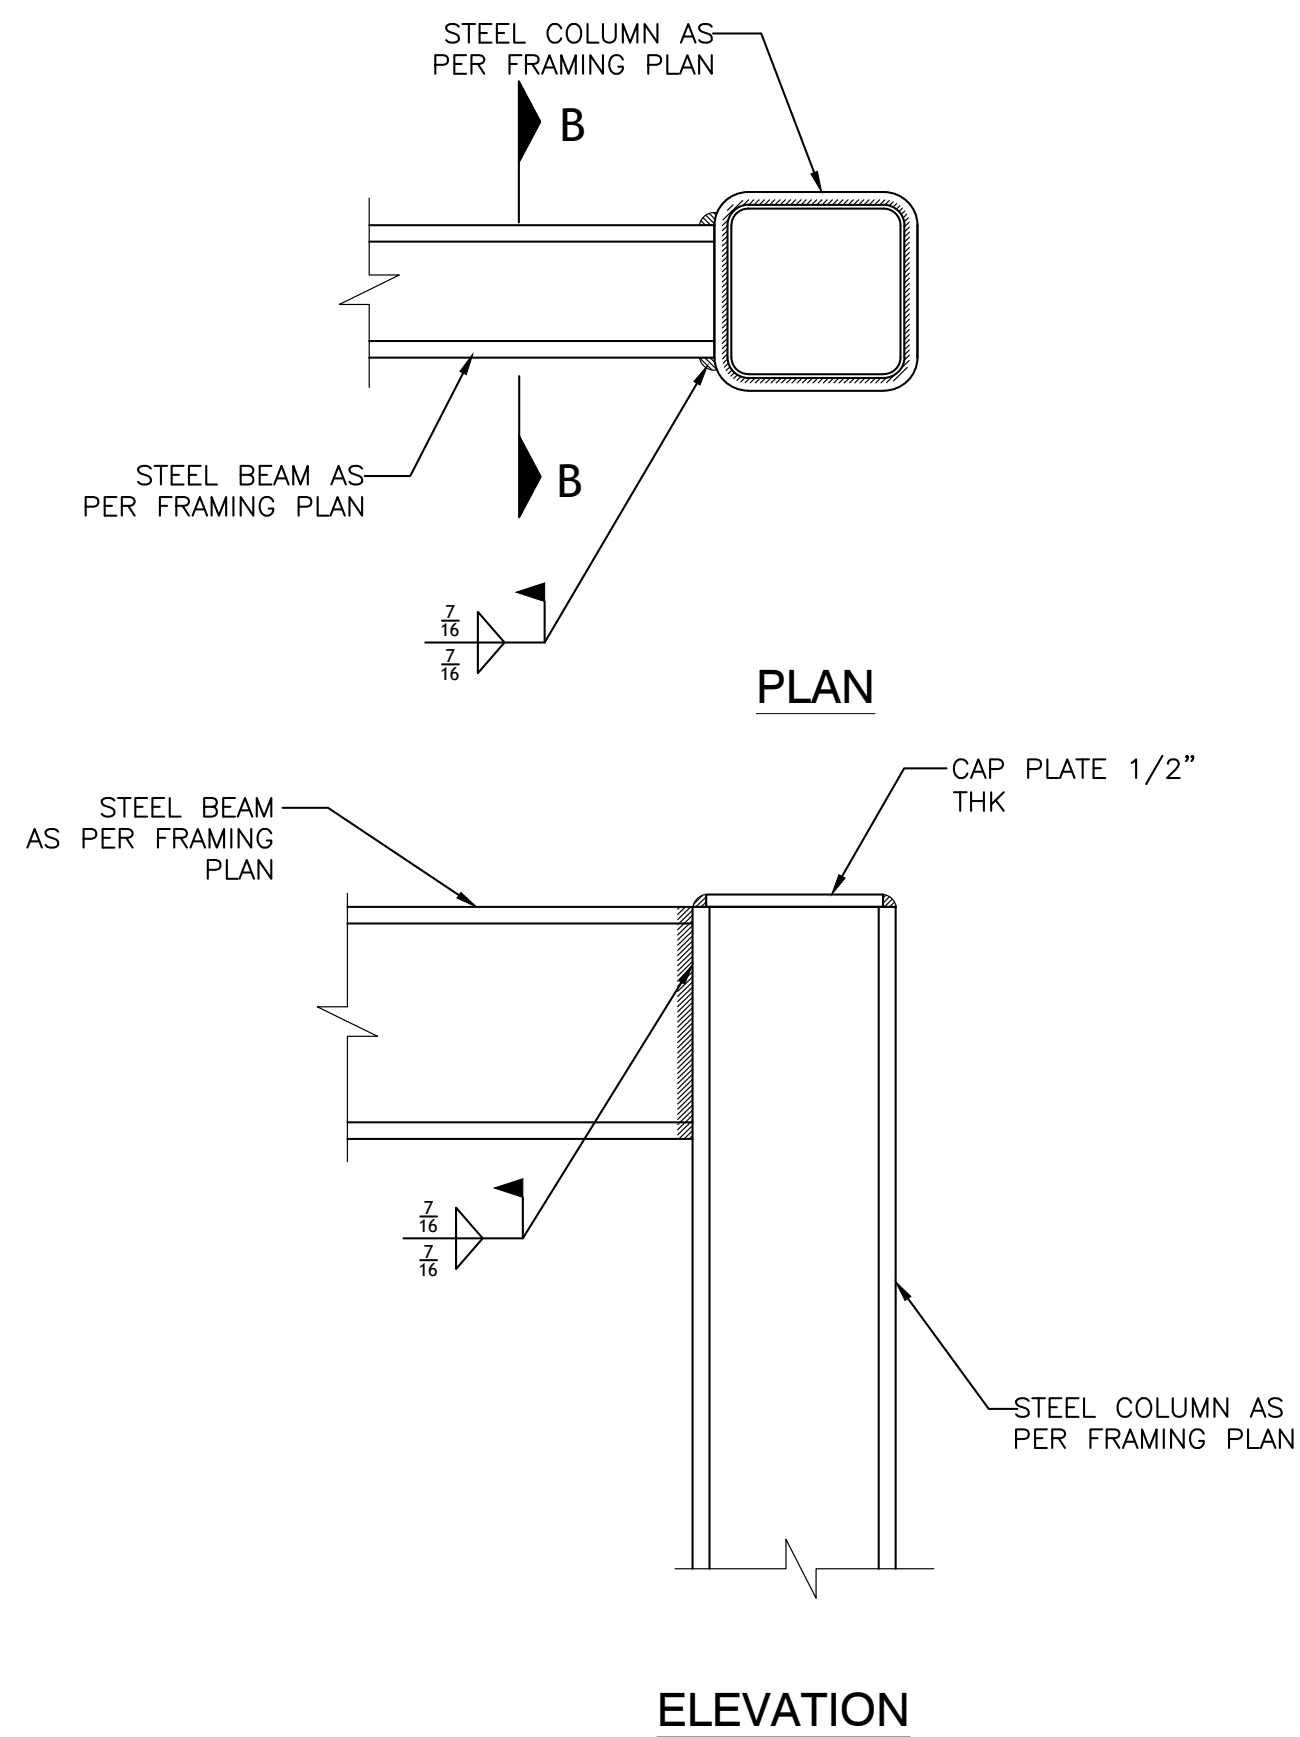

4 HSS STEEL COLUMN TO HSS STEEL BEAM CONNECTION DETAIL
SCALE: NTS

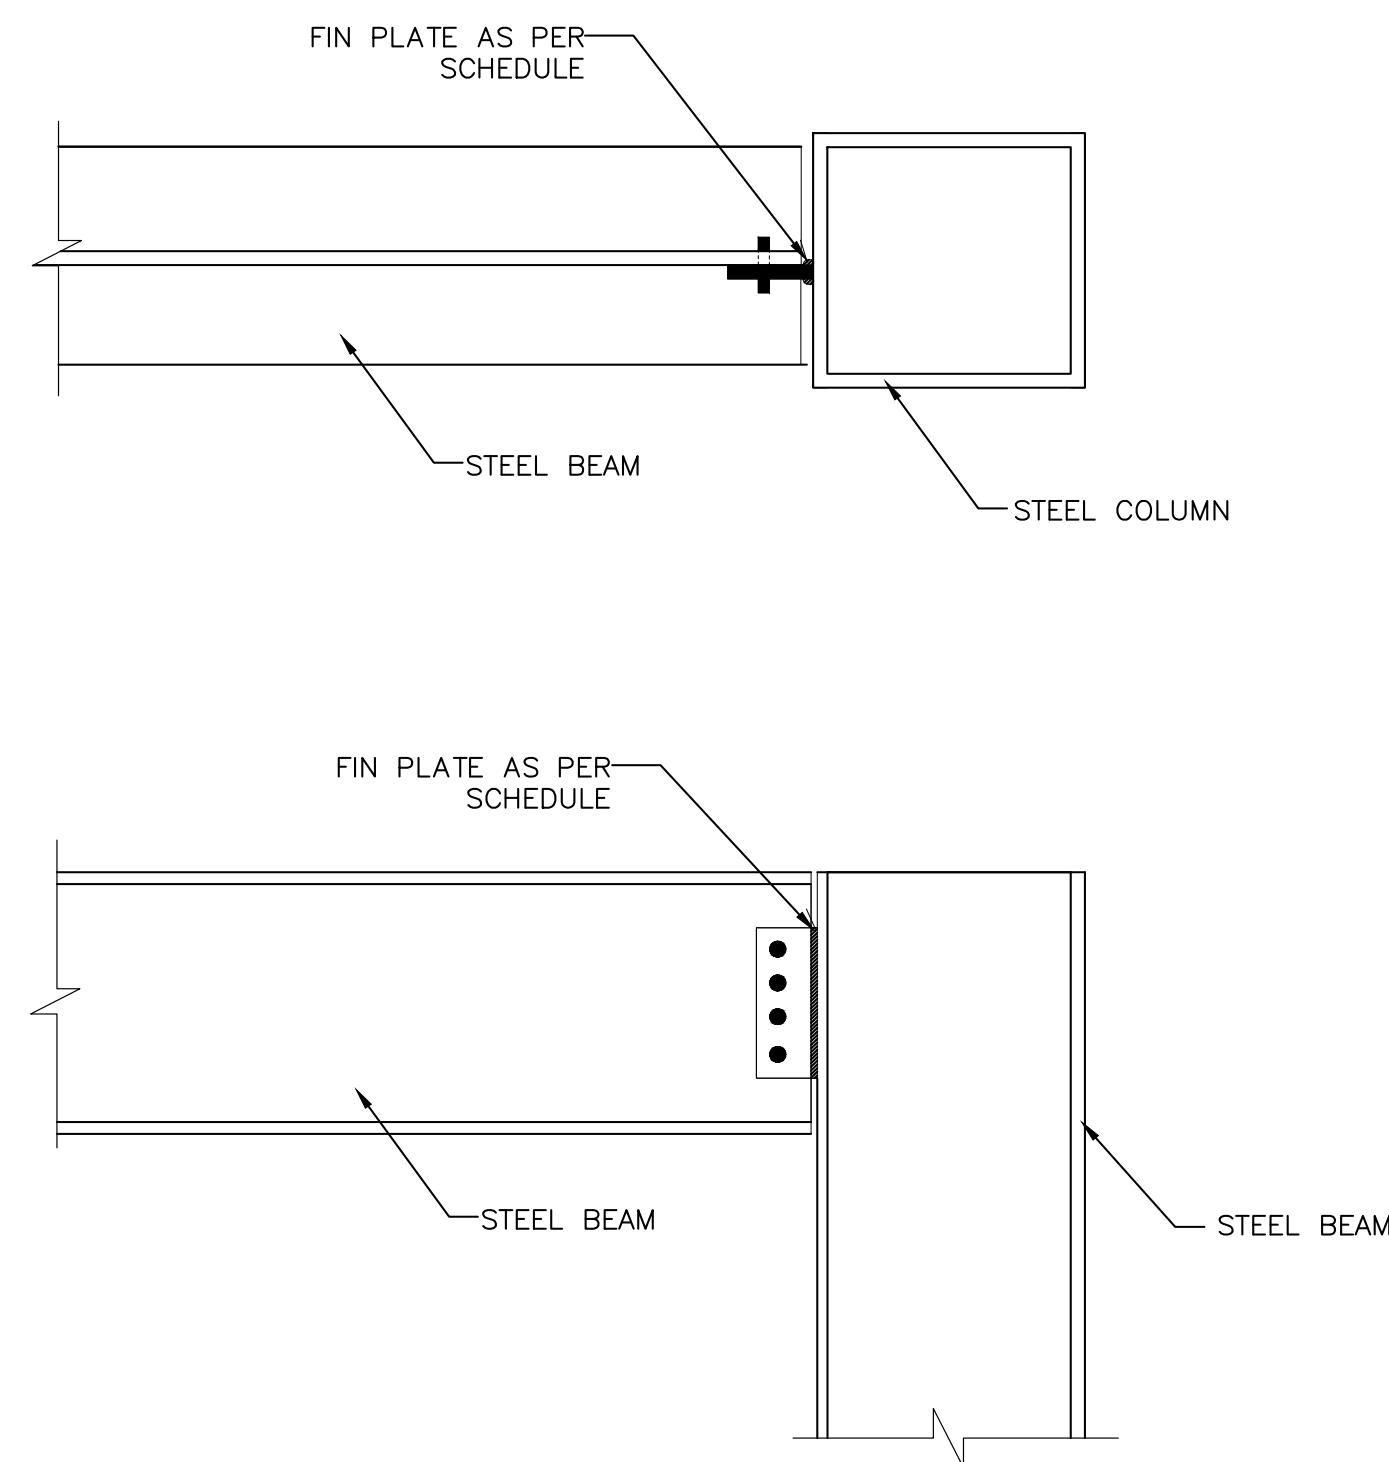

5 INTERIOR FRAME SHEAR PANEL ELEVATION
SCALE: NTS

JS
ARCHITECTS
9726 E. 42nd St. Suite 153, Tulsa, 74146
918.640.6800 - jmsanford@aol.com
COPYRIGHT 2006 John Sanford

DEVELOPED BY
HI-TECH HOSPITALITY

Residence Inn
BY MARRIOTT

RESIDENCE INN BY MARRIOTT

NW CORNER OF PINE & MEMORIAL, TULSA, OK

TULSA AIRPORT RIBM
61208
Project Number

THESE DRAWINGS ARE INTENDED FOR REVIEW AND PERMITTING. DRAWINGS ARE NOT TO BE USED FOR CONSTRUCTION WITHOUT ARCHITECT'S AND ENGINEER'S SIGNATURE AND THEIR DATE OF ISSUE FOR CONSTRUCTION.

No.	Description	Date

SHEET
S147
DETAILS

6-08-2026
NOT VALID FOR CONSTRUCTION UNLESS SIGNED IN THIS BLOCK